

Packaged Air-Conditioners Catalogue for Europe

FDseries

2025



FDT
4 way



FDTC
4 way compact

New RC-ES1
Design Remote Control



New M-Air PRO
Mobile App



Fine snow panel



Shadow black panel



Packaged Air-Conditioners

FD High Performance Air-Conditioning **series**

The PAC range from Mitsubishi Heavy Industries Thermal Systems is ideal for air-conditioning in offices, shops, restaurants, and bars, as well as other commercial environments. The versatility of the PAC range, offers you a wide selection of models in function of your installation needs. The modern and attractive design of our indoor units is harmoniously integrated into any atmosphere creating a pleasant and relaxing environment.



Contents

Product Information	4
Product Line Up	12
Outdoor Units	14
Indoor Units Benefits Summary	20
FDT Ceiling Cassette -4way-	22
FDTC Ceiling Cassette -4way compact-	38
FDU Duct Connected -High Static Pressure-	46
FDUM Duct Connected -Low/Middle Static Pressure-	56
SRK Wall Mounted	70
FDE Ceiling Suspended	78
FD Floor Standing	92
Outdoor Unit Dimensions	101
Control Systems	106
Air Handling Unit Interface	108
Energy Efficient and Environmentally Conscious	112




New Generation

Ceiling Cassette
4way

FDT



- Automatic energy saving control
- Keep maximum comfort with minimal draft
- Quiet operation

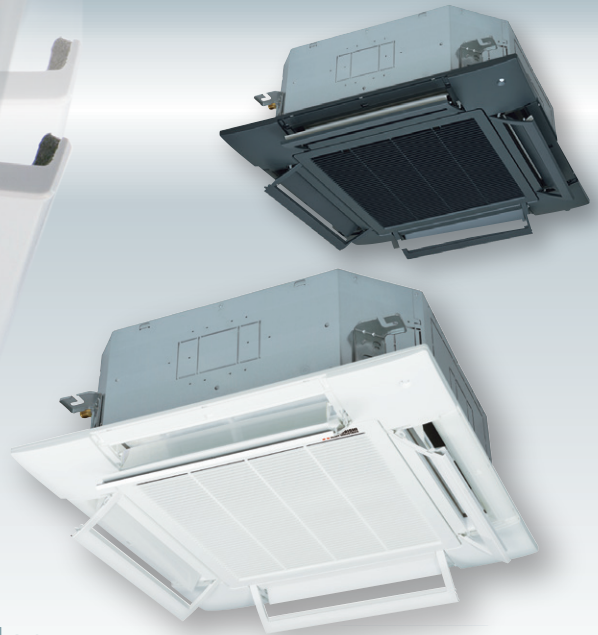


High energy efficiency with new technology


FDT can achieve higher seasonal efficiency by utilising Mitsubishi Heavy Industries latest technology.

● SEER and SCOP is defined in European regulations. Please refer to P112.

SEER in cooling ■ Previous(VG(R410A)) ■ New(VH(R32))

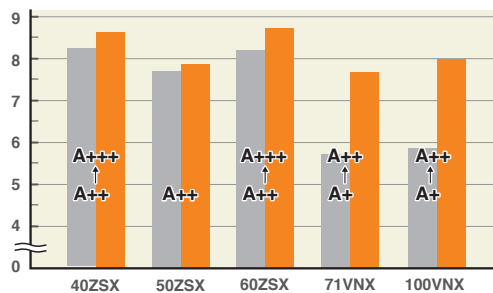

SCOP in heating ■ Previous(VG(R410A)) ■ New(VH(R32))

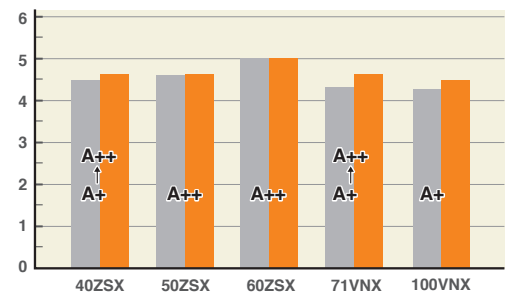

Quieter noise & Improved aerodynamic performance of the unit

New technology achieved low noise while keeping capacity and comfort by reducing the pressure fluctuation in an indoor unit. A fan guard ensures both safety and quietness.

Turbo fan



Fan guard (standard equipment)



Various panels available

You can choose white and black panel according to the atmosphere and purpose of the room.



White panel (Fine snow)



Black panel (Shadow black)

New flexible flap control for draft prevention



Draft Prevention Panel (Option)

Each of the 4 flaps can be controlled individually at each operation mode. They change air flow direction and prevent drafts occurring. This function also provides flexible control of air flow direction.



Motion Sensor (Option)

Motion sensor (option) detects human activity. Energy saving control is achieved by shifting set temperature according to detected amount of activity.

Ceiling Cassette
4way compact

FDTC



- More comfort and Higher energy savings
- European design
- Lower noise



A' Design Award and Competition is the World's largest, most prestigious and influential design accolade, the highest achievement in design. A' Design Award Winner Logo, symbolizes exceptional design excellence in products, projects and services.

European Design & Flat Panel



Various panels available

You can choose the grill design according to the atmosphere and purpose of the room.



Grid type

Integrated Ceiling System Design(600×600)

Draft Prevention Panel and Motion Sensor (Option)

Draft prevention panel and motion sensor are available on FDTC, just like on FDT.

Floor
standing

FDF

- New floor standing unit compatible with R32
- Increased Energy efficiency
- R32 leak detector built-in



Improved features

Heat exchanger design optimized for R32 operation. The leak detector device will be integrated at the bottom of the unit. Remote control upgraded for leak detector functions.

Leak detector



Inside



Draft Prevention


Keep maximum comfort with minimal draft: FDT & FDTC control flaps with more flexibility.




Ceiling cassette Compact FDTC




Ceiling cassette FDT

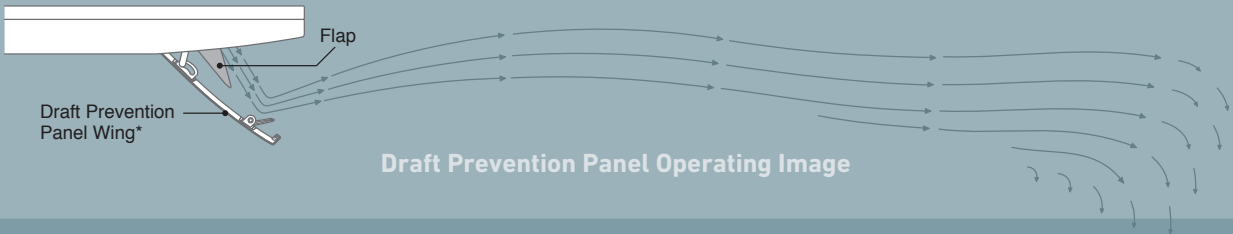

Draft Prevention Panel off

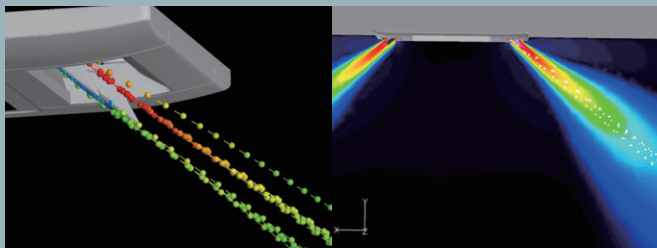

Draft Prevention Panel working *

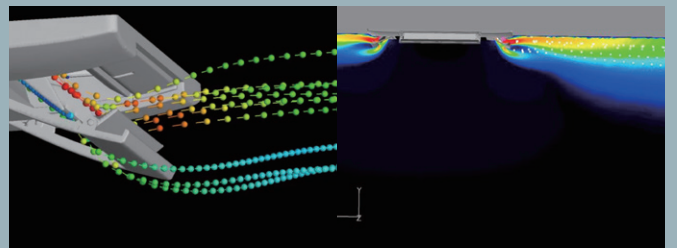

Draft Prevention Panel provides a comfortable airflow without any draft feeling. Whether cooling or heating a room, the remote control can be used to instantly suppress any warm or cool drafts. This accurately assists how air flow is directed out of the indoor unit.

* Images is for illustration purposes.




Motion Sensor

Energy saving operation by detecting human movement

3 Step Control

- 1 Power Control** Motion sensor (option) detects human activity. Energy saving control is achieved by shifting set temperature according to detected amount of activity.
- 2 Stand by** Unit will go on stand-by mode when no activity is detected. When the motion sensor detects activity again, the unit will automatically re-start operation.
- 3 Auto Off** Unit will go off automatically when no activity is detected for 12 hours.

Optional for models

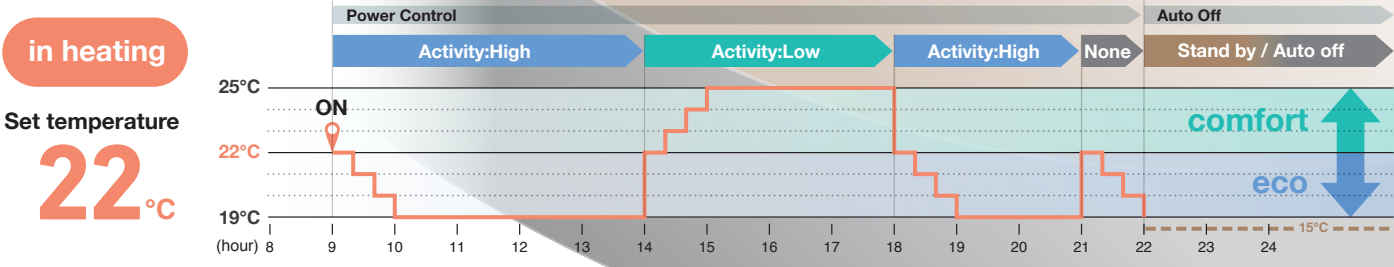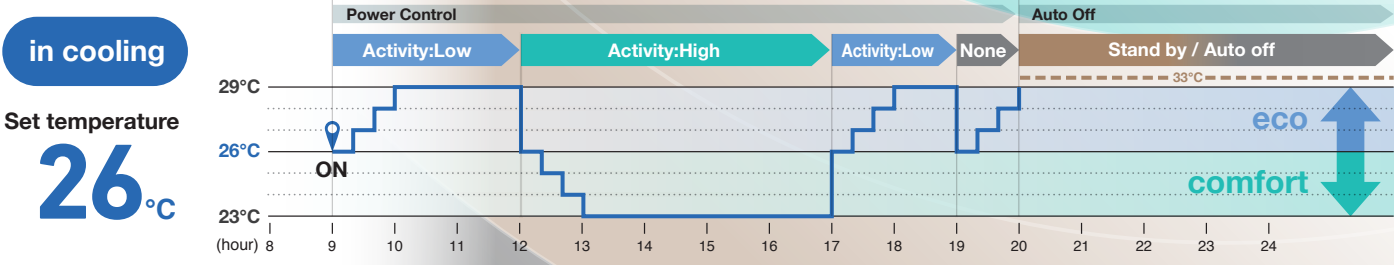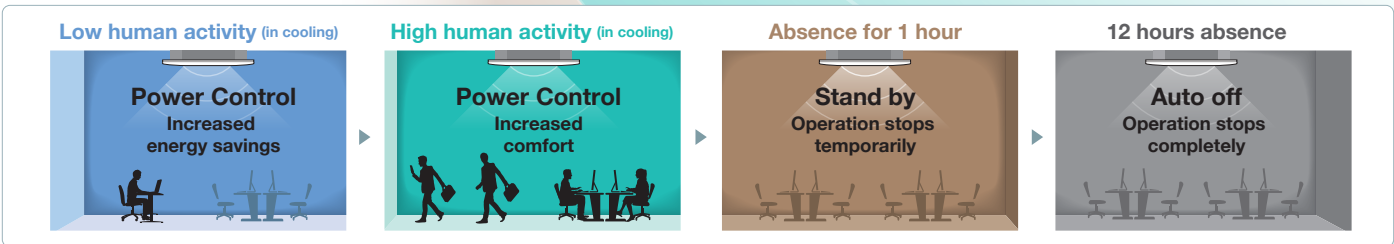

Operation mode and Control of Motion sensor		eco operation		Operation mode				
		comfort operation		Auto	Cool	Heat	Dry	Fan
Power Control *1	Human activity 	Low	Cooling +3°C Heating +3°C	+3°C	+3°C	+3°C	—	—
		High	Cooling -3°C Heating -3°C	-3°C	-3°C	-3°C	—	—
		None	Cooling +3°C Heating -3°C	+3°C	-3°C	-3°C	—	—
Auto Off *2				●	●	●	●	●

*1 Set temperature is revised maximum $\pm 3^{\circ}\text{C}$ at Cooling/Heating mode by detecting heat volume movement.
 *2 Absence for 1 hour \Rightarrow Operation stops ("Stand-by") 12 hours absence \Rightarrow Operation stops completely

New! Design Remote Control

RC-ES1

- Simple and sophisticated design
- Compact size (86×86mm)
- Remote control with Bluetooth® wireless technology



You can control the air-conditioner by installing App on your smart phone



Search for "Smart M-Air PRO" from the Google Play™ store for Android™ and App Store for iPhone.

Please check the app stores for the latest supported OS version information.

App Store and iPhone are registered trademarks of Apple Inc. Google Play and the Google Play logo are trademarks of Google LLC.



Wireless connection

- Remote control with Bluetooth® wireless technology
- Easy set-up of indoor units
- Notifications of abnormal conditions or operational data from the remote control will be sent to your smartphone.




Information screen

By looking at the information screen, you can check the current operating conditions at a glance.



Central management by smart phone


You can select and change the settings of multiple rooms with only one action on your smartphone.*

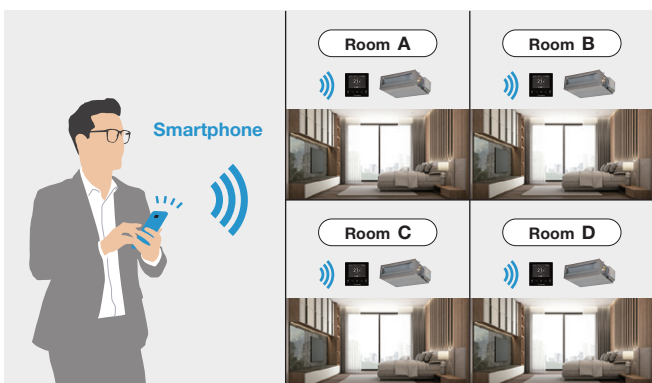

*The function would be available when the smartphone is connected to the remote control with Bluetooth® wireless technology.

Easy installation with the new casing structure

The casing is separated into the lower and the upper case. By inserting the upper case into the lower case embedded to the wall, the remote could be easily installed.

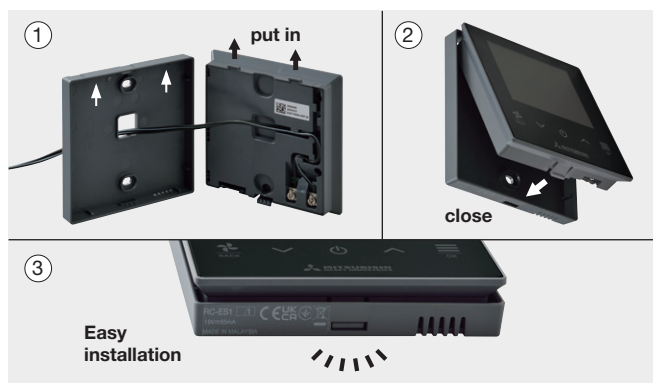

Easy to instinctively operate with simplified icons

Operation settings	Common settings	Display & sound settings
<p>MODE Operation mode Heating / Cooling / Fan / Dry /Auto</p> <p>High power ON / OFF</p> <p>Ventilation ON / OFF</p> <p>Timer Set ON / OFF timer by hour Set ON / OFF timer by clock</p> <p>Air direction Upper / lower flap, Flap direction</p>	<p>Bluetooth ON / OFF</p> <p>Pairing mode Make a new Bluetooth pairing</p> <p>App QR code QR code for the app</p>	<p>Brightness 1-10</p> <p>Lighting time 1-10</p> <p>Operation sound Sound On / Sound Off</p>
Information screen		
<p>Temporary stop</p> <p>Thermo-off</p> <p>Fan operation</p> <p>Cooling test run</p> <p>Static pressure adjustment</p> <p>Dew drop prevention control</p> <p>Home leave operation</p>	<p>High power operation</p> <p>Eco operation</p> <p>Set temp. shift</p> <p>Warm up operation</p> <p>Heating preparation</p> <p>Defrost operation</p> <p>Outdoor silent operation</p>	<p>Motion sensor control</p> <p>Anti draft control</p> <p>Demand control</p> <p>Filter cleaning time</p> <p>Back-up control in operation</p> <p>Fault back-up control in operation</p> <p>Periodical check indication</p> <p>ON timer setting</p> <p>OFF timer setting</p> <p>Weekly timer setting</p> <p>Sleep timer setting</p>

"The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by MITSUBISHI HEAVY INDUSTRIES THERMAL SYSTEMS, LTD. is under license. Other trademarks and trade names are those of their respective owners."

"QR Code" is a registered trademark of DENSO WAVE INCORPORATED.

Remote Control

Simple use with advanced settings REMOTE CONTROL

RC-EX3D

Function Switch

The function switch allows the user to select preferred two functions that are desired from the seven available functions shown. These functions can be used by simply pressing the button after they are set, allowing you to use your preferable functions immediately.



1. Draft prevention ON/OFF



Anti draft can be turned ON/OFF with a single tap of the button.

2. High Power Mode



High Power Mode achieve excessive cooling / heating capacity in 15 minutes to quickly adjust the room temperature to a comfortable level.

3. Energy Saving Mode



Temperature is set to be optimized to save energy without losing comfort.

4. Quiet Mode



Outdoor unit starts to operate quietly by activating this mode. The time of this mode can be set in conjunction with Indoor Silent Timer.

5. Home Leave Mode



Home leave mode maintains the room temperature at a moderate level.

6. Favourite Mode



Operation mode, set temperature, fan speed and air flow direction will automatically be adjusted to the programmed favourite setting.



7. Filter Sign



Announces the due time for cleaning the air filter.



Draft Prevention Setting (only FDT•FDTC series)

User can enable/disable the motion of Draft prevention panel for each air outlet for each operation mode. This function can be set while operating.



Easy Adjustment of the Air Flow

User can visually confirm and set the direction of flaps using the visual display on the remote controller.




Motion Sensor Control Presence of humans and activity are detected by a motion sensor to perform various controls.


1 Select Enable / Disable

Select **Enable** / **Disable** for the motion sensor of the indoor unit connected to the R/C.

Motion sensor control



Enable/Disable




2 Select Enable / Disable per control

- Power control
- Auto-off



Enable/Disable

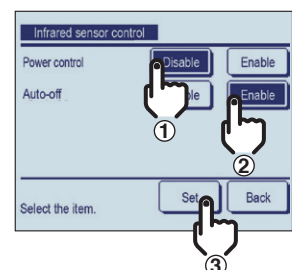

Additional Functions of External Input / Output

The external input/output of indoor unit by remote controller can set input/output based on user's demand.



Remote surveillance system



Card key on-off

External Input

Two of the following could be selected

CNT, CNTA

- Input**
- Run / Stop
 - Permission/Prohibition
 - Cooling/Heating
 - Emergency Stop
 - Set temp. shift
 - Forced thermo-off
 - IU operation stop
 - Silent mode

External Output



Four of the following could be selected

CNT

- Output**
- Operation
 - Heating
 - Compressor ON (thermo-ON)
 - Inspection
 - Cooling (defrosting)
 - Fan operation
 - Fan operation with Phi or Hi
 - Fan operation with Me or Lo
 - Defrosting (oil return in heating operation)
 - Ventilation
 - Heater ON
 - Free cooling
 - IU overload alarm


Silent Mode Control

The Outdoor unit is controlled prioritising quiet operation. Silent mode control must be set to the F1 or F2 switch. User can start/stop the silent mode control with a single tap of a button.






Indoor Unit Capacity Display

Capacities of Indoor units connected to the RC-EX3D are displayed.

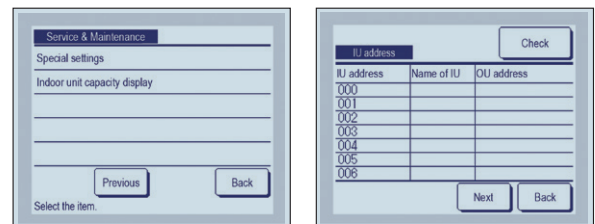




Language Switching

User can select from the following languages and also switch them on the top display.

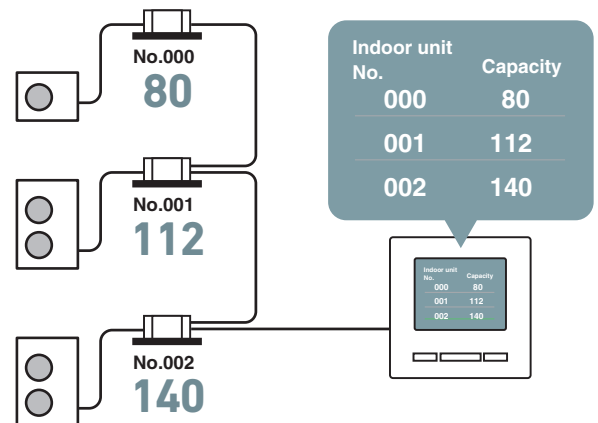






















Error display

“Error” If any error occurs on the air-conditioner, the “Unit protection stop” is indicated on the message display.



Product line up

SINGLE SPLITS

<div style="background-color: #f4a460; padding: 10px; text-align: center;"> <h1 style="margin: 0;">FD series</h1> </div>									
				HP	1.5	2.0	2.5	3.0	4.0
				kW	4.0	5.0	6.0	7.1	10.0
Ceiling Cassette	FDT 4way 	P22		1 Phase	●	●	●	●	●
			3 Phase					●	
			1 Phase						●
		3 Phase						●	
	FDTC 4way compact 	P38		1 Phase	●	●	●		
			3 Phase						
Duct Connected	FDU High Static pressure 	P46		1 Phase				●	●
			3 Phase					●	
			1 Phase						●
		3 Phase						●	
	FDUM Low/Middle Static pressure 	P56		1 Phase	●	●	●	●	●
			3 Phase					●	
	1 Phase						●		
3 Phase						●			
Wall Mounted	SRK 	P70		1 Phase				●	●
			3 Phase					●	
			1 Phase						
		3 Phase							
Ceiling Suspended	FDE 	P78		1 Phase	●	●	●	●	●
			3 Phase					●	
			1 Phase						●
		3 Phase						●	
Floor Standing	FDF 	P92		1 Phase				●	●
			3 Phase					●	
			1 Phase						●
		3 Phase						●	

Capacity Range (Nominal Cooling Capacity)



Micro Inverter



Standard Inverter



5.0		6.0		4.0		5.0		6.0		8.0		10.0		12.0		3.0		3.5		4.0		5.0	
12.5		14.0		10.0		12.5		13.6		20.0		25.0		27.0		7.1		9.0		10.0		12.1	
●	●	●	●	●	●											●	●	●	●				
●	●	●	●	●	●																		
●	●	●	●	●	●																		
●	●	●	●	●	●																		
●	●	●	●	●	●											●	●	●	●				
●	●	●	●	●	●	●	●	●	●														
●	●	●	●	●	●																		
●	●	●	●	●	●	●	●																
●	●	●	●	●	●											●	●	●	●				
●	●	●	●	●	●																		
●	●	●	●	●	●																		
●	●	●	●	●	●																		
		●														●			●				
		●																					
		●																					
		●																					
●	●	●	●	●	●											●	●	●	●				
●	●	●	●	●	●																		
●	●	●	●	●	●																		
●	●	●	●	●	●																		
●	●	●	●	●	●											●	●	●	●				
●	●	●	●	●	●																		
●	●	●	●	●	●																		
●	●	●	●	●	●																		
●	●	●	●	●	●																		

Outdoor units

Our new advanced technology has high efficiency, strong heating and long piping. This contributes to the environmental protection through energy saving and permits installation of the units (4–6HP) considering a heating operation under temperature conditions down to -20°C. The Standard Inverter series offer optimised efficiency at a reasonable cost.

Line up

HP	1.5	2	2.5	3	3.5	4	5	6	8	10	12
Hyper Inverter	●	●	●	●	-	●	●	●	-	-	-
Micro Inverter	-	-	-	-	-	●	●	●	●	●	●
Standard Inverter	-	-	-	●	●	●	●	-	-	-	-

Hyper Inverter



SRC40ZSX-W1 (1.5HP)
SRC50ZSX-W3 (2.0HP)
SRC60ZSX-W3 (2.5HP)



FDC100VNX/VSX-W (4.0HP)
FDC125VNX/VSX-W (5.0HP)
FDC140VNX/VSX-W (6.0HP)



FDC71VNX-W (3.0HP)



FDC100VNX/VSX (4.0HP)
FDC125VNX/VSX (5.0HP)
FDC140VNX/VSX (6.0HP)



Micro Inverter



FDC100VNA-W/VSA-W (4.0HP)
FDC125VNA-W/VSA-W (5.0HP)
FDC140VNA-W/VSA-W (6.0HP)



FDC200VSA-W (8.0HP)
FDC250VSA-W (10.0HP)
FDC280VSA-W (12.0HP)



Standard Inverter



FDC71VNP-W (3.0HP)



FDC90VNP-W (3.5HP)
FDC100VNP-W (4.0HP)



FDC100VNA/VSA (4.0HP)
FDC125VNA/VSA (5.0HP)
FDC140VNA/VSA (6.0HP)



FDC200VSA (8.0HP)



FDC250VSA (10.0HP)




FDC125VNP-W (5.0HP)




High Efficiency

Outdoor units high efficiency levels are achieved thanks to our latest technologies, such as high efficient twin rotary compressors.

SEER in cooling

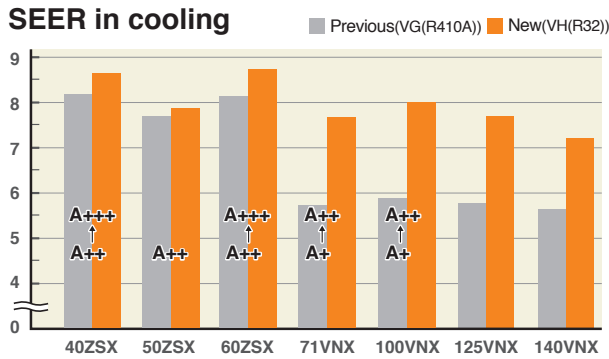

SCOP in heating

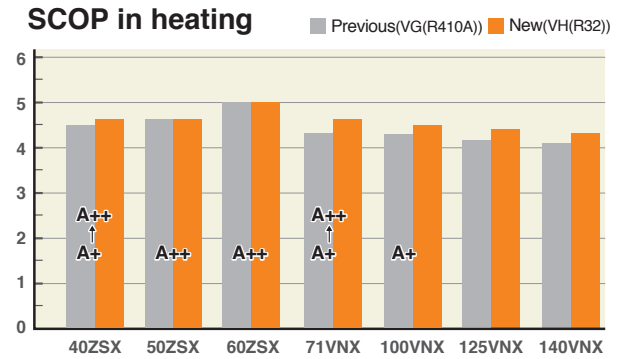

· In case of ceiling cassette 4way unit.


Our Latest Technologies

1 High efficiency performance on the DC twin rotary compressors

Adoption of DC twin rotary compressor has enabled to utilize a high-speed range of up to 120 rps at the maximum to secure the required capacity.



DC twin rotary compressor

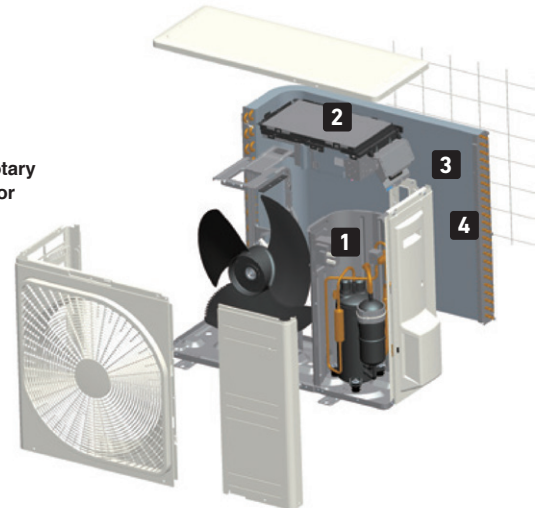

2 Vector inverter control

Optimum compressor control has been realized by employing the vector control* and the starting current has been improved significantly compared with former models. Moreover, vibration has been reduced.

* Vector control means a technique to realize an optimum control by converting the current wave to a smooth sinusoidal waveform

Better partial load efficiency


Distributed winding motor

Centralized winding motor


* only R32 models

3 Heat exchanger

Thanks to changing fin configuration from flat sheet to M shape fin. This high dimensional structure provides optimum balance of heat transfer and airflow.

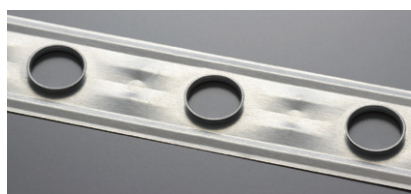


sectional structure

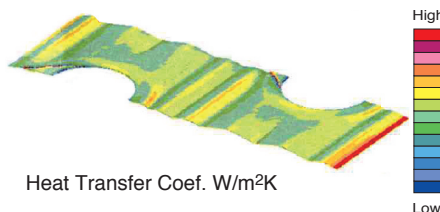

4 Blue fin

Due to application of blue coated fins (KS101) on the heat exchanger of the new outdoor unit, corrosion resistance has been improved compared to previous models.



Hyper Inverter	3-6HP
Micro Inverter	4-12HP
Standard Inverter	3.5-5HP

Outdoor units


Leading Powerful Heating Capacity

- The maximum heating capacity can be increased by:
- optimizing the refrigerant control and use of the electric expansion valve
 - Utilization of the twin rotary compressors
 - Nominal heating capacity can be reached when outdoor temperature is -8°C
 - Also effective to be used in cold areas

Hyper Inverter

Temperature of supply air can reach 40°C in 4 minutes after start up under low temperature operation conditions (at both indoor and outdoor temperature of 2°C) and can reach 50°C in 8 minutes after that.


Heating capacity (in case of 5HP, 3Phase 380V)

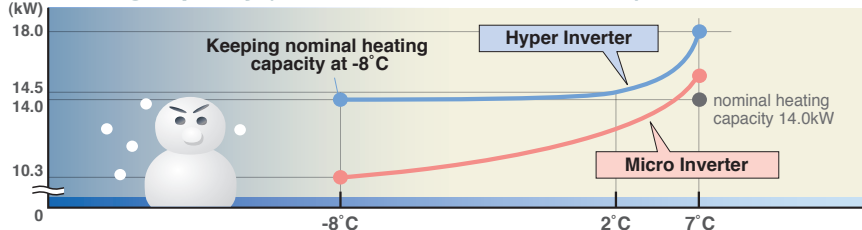

model name	nominal heating capacity (kW at outdoor temperature of 7°C)	heating capacity at outdoor temperature of -8°C
FDC100VSX(4HP, 3Phase 380V)	11.2kW	11.2kW
FDC125VSX(5HP, 3Phase 380V)	14.0kW	14.0kW
FDC140VSX(6HP, 3Phase 380V)	16.0kW	16.0kW





Please refer to our technical manual for installation conditions, operation range and heating/cooling capacities. (including 1Phase 220V)

Heating capacity

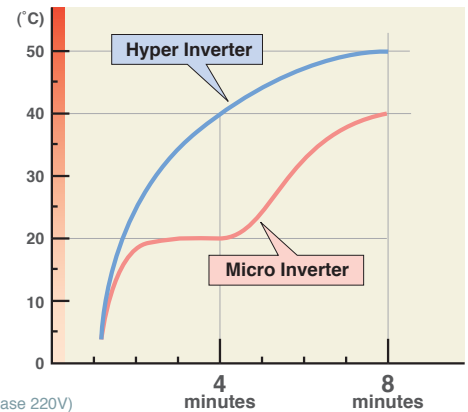

Wide Range of Operation



Our new advanced technology has expanded the heating and cooling operation range. This permits installation of the units under a low outdoor temperature conditions down to -15°C/-20°C in heating operation and -15°C in cooling operation.

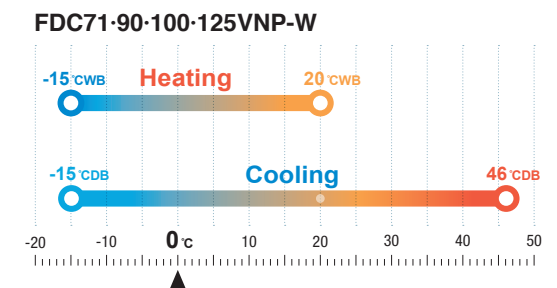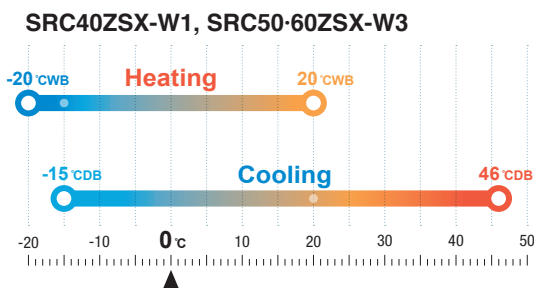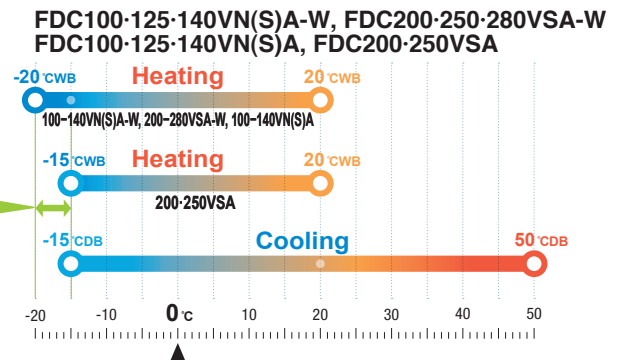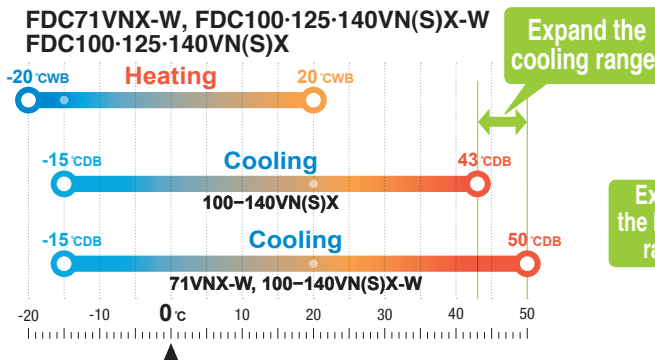

Silent Mode Operation

Hyper / Micro Inverter

Improved "silent mode" is possible, in two steps. ※ Applied on 4-6HP, 8-12HP(R32)

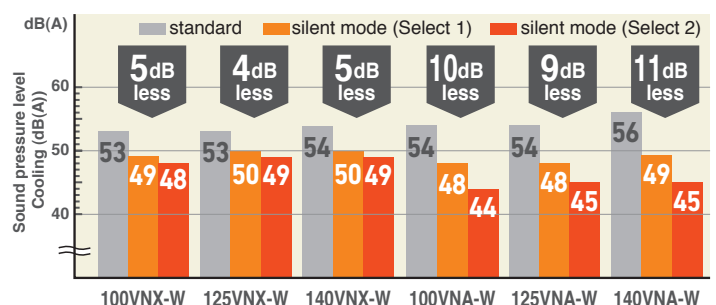
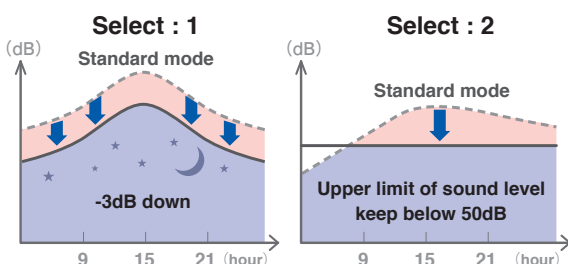


Installation Workability

Enhanced installation workability thanks to the extended pipe length – longest level in the industry and precharged refrigerant.

Long piping (in case of Hyper Inverter 4–6HP (R32))

Wider variation of installation!

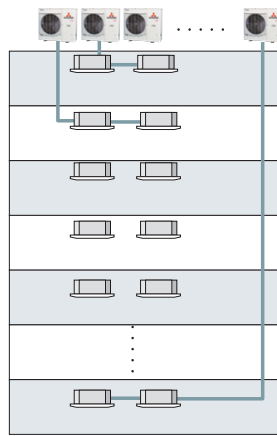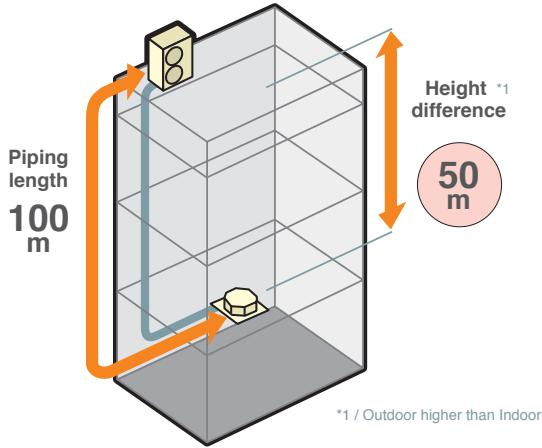

Hyper Inverter		
HP	Piping length	Height difference
1.5 – 2.5	30m	20m
3	50m	30m
4–6(R32)	100m	50m
4–6(R410A)	100m	30m

Micro Inverter		
HP	Piping length	Height difference
4 – 6	50m	50m ^{*2}
8–10(R32)	70m	50m ^{*3}
8-10(R410A)	70m	30m
12	60m	50m ^{*3}

Standard Inverter		
HP	Piping length	Height difference
3 ~ 5	30m	20m

Refrigerant precharged piping length extending to 30m


Refrigerant precharged piping length extends up to 30m*. This eliminates the need to add refrigerant on site, which sets it free from trouble of excessive or insufficient charging of refrigerant, and allows carrying out the installation smoothly. * Hyper inverter 1.5–2.5HP and Standard Inverter are up to 15m.

^{*2} When the outdoor unit is installed at a position higher than the indoor unit by 30m or more, set SW5-2 on the control PCB to ON.
^{*3} In case of following conditions: Max.50m(Outdoor unit is higher & Outdoor temperature ≤ 43°C), Max.30m(Outdoor unit is higher & Outdoor temperature > 43°C)

Serviceability


Micro Inverter (8(R32)-10-12HP)

Improved freedom of piping layout



A transparent rain cover

Attached as a standard for easy maintenance.



Wire insertion holes for fall prevention



2 Layer Construction

Thanks to control box structure with 2 layer construction using hinge connection, service and maintenance has been made much easier for inverter components.



Fixing screws to service panel

Decreasing number of screws from 5 to 2, installation & service speed is improved.

Base heater kit (Option)

This kit is recommended to be used in an area where the lowest temperature drops below 0°C.



CW-H-E1


applied for



Hyper Inverter	FDC71VNX-W	FDC71VNX
	FDC100·125·140VNX-W	FDC100·125·140VNX
	FDC100·125·140VSX-W	FDC100·125·140VSX
Micro Inverter	FDC100·125·140VNA-W	FDC100·125·140VNA
	FDC100·125·140VSA-W	FDC100·125·140VSA
	FDC200·250·280VSA-W	FDC200·250VSA


Monitoring Function

To your PC monitoring and service tasks made simple with our service software ("Mente PC").

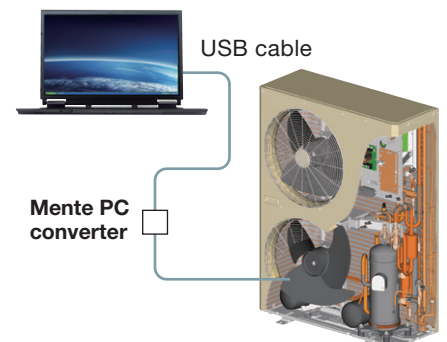


Field service with smart device

Monitoring and service task could now be done with a smartphone or a tablet by connecting to the Mente PC converter.



The data collected via the smart device could also be sent and viewed with our service software Mente PC.

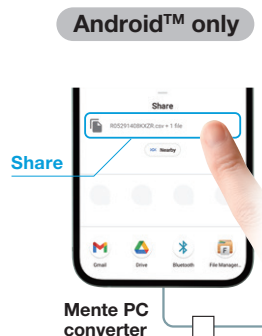


*Android™ is a trademarks or registered trademarks of Google LLC.

Outdoor units

■ MULTI SYSTEM

Twin / Triple / Double Twin Multi System

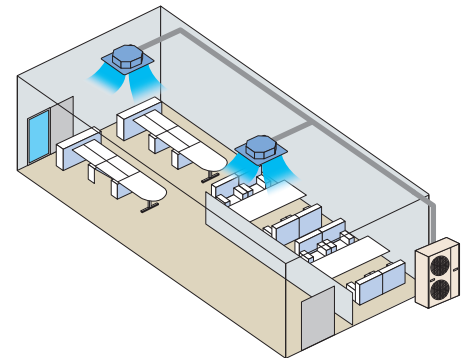


Up to four indoor units can be connected to a single outdoor unit and operated simultaneously with a single remote control. By referring to the following table for applicable indoor units, select the same models and capacities.

Combination of indoor units

Outdoor Unit		Hyper Inverter				Micro Inverter						
FDC		71VNX-W	100VNX-W 100VSX-W	125VNX-W 125VSX-W	140VNX-W 140VSX-W	100VNA-W 100VSA-W	125VNA-W 125VSA-W	140VNA-W 140VSA-W	—	200VSA-W	250VSA-W	280VSA-W
		—	100VNX 100VSX	125VNX 125VSX	140VNX 140VSX	100VNA 100VSA	125VNA 125VSA	140VNA 140VSA	200VSA	—	250VSA	—
Twin		40 + 40	50 + 50	60 + 60	71 + 71	50 + 50	60 + 60	71 + 71	100 + 100	100 + 100	125 + 125	140 + 140
Triple					50 + 50 + 50			50 + 50 + 50	71 + 71 + 71	71 + 71 + 71		
Double Twin								50+50+50+50	50+50+50+50	60+60+60+60	71+71+71+71	

V Multi System

Ideal for the installation in large areas and L-shaped rooms, the V Multi System has an extensive degree of flexibility in the selection of indoor units. Specifically, the selection of indoor units with different capacities in different types can be made.

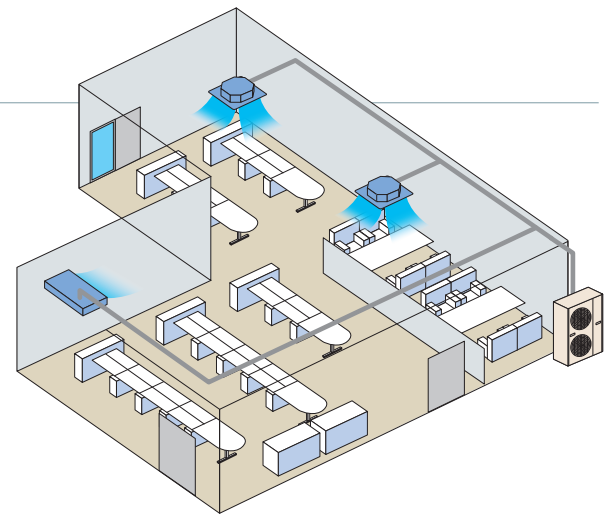

Combination of indoor units

Outdoor Unit		Hyper Inverter				Micro Inverter						
FDC		71VNX-W	100VNX-W 100VSX-W	125VNX-W 125VSX-W	140VNX-W 140VSX-W	100VNA-W 100VSA-W	125VNA-W 125VSA-W	140VNA-W 140VSA-W	—	200VSA-W	250VSA-W	280VSA-W
		—	100VNX 100VSX	125VNX 125VSX	140VNX 140VSX	100VNA 100VSA	125VNA 125VSA	140VNA 140VSA	200VSA	—	250VSA	—
Twin		40 + 40	50 + 50	60 + 60 50 + 71	71 + 71	50 + 50	60 + 60 50 + 71	71 + 71	100 + 100 71 + 125	100 + 100 71 + 125	125 + 125	140 + 140
Triple					50 + 50 + 50			50 + 50 + 50	71 + 71 + 71	71 + 71 + 71	60+60+125 71+71+100	71+71+140
Double Twin								50+50+50+50	50+50+50+50	60+60+60+60	71+71+71+71	

Applicable indoor units

Model	Capacity						
	40	50	60	71	100	125	140
Twin / Triple Double Twin Multi System	FDT	●	●	●	●	●	●
	FDTC	●	●	●			
	FDUM	●	●	●	●	●	●
	SRK		●*1	●*1	●*2	●	

Model	Capacity						
	40	50	60	71	100	125	140
Twin / Triple Double Twin Multi System	FDE	●	●	●	●	●	●
	fdf				●	●	●
V Multi System	FDT	●	●	●	●	●	●
	FDE	●	●	●	●	●	●


* 1 Hyper Inverter model & Micro Inverter -W model only.
 * 2 Micro Inverter -W model combination only.

Choice of piping specification

Diagrams below show the application as samples. For further information, refer to TECHNICAL MANUAL.


Twin type

Models FDC71, FDC100-140, FDC200, FDC250, FDC280
 [Branch pipe set : DIS-WA1G, DIS-WB1G]

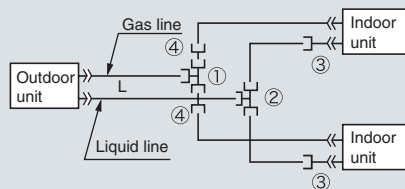

Triple type

Model FDC140, FDC200
 [Branch pipe set : DIS-TA1G, DIS-TB1G]



The indoor - outdoor piping length differences among indoor units are less than 3m.

Chart of shapes of branch piping parts

Branching pipe set type	Outdoor unit	Indoor unit combinations	Symbol		
			Branching pipe set for a gas pipe	Branching pipe set for a liquid pipe	Different diameter pipe joint
DIS-WA1G (Two-way branching set)	FDC71	40+40			③ Joint A ID9.52 2 pieces Flare Joint (for indoor unit side connection)
	FDC100	50+50			
		40+60			
	FDC125	60+60			
	FDC125	50+71			
	FDC140	71+71			
		50+100			
DIS-WB1G (Two-way branching set)	FDC200	100+100			④ Joint C OD12.7 1 piece ID9.52
		71+125			
	FDC250 FDC280	125+125 140+140			
DIS-TA1G (Three-way branching set)	FDC140	50+50+50			③ Joint A ID9.52 3 pieces Flare Joint (for indoor unit side connection)
DIS-TB1G (Three-way branching set)	FDC200	71+71+71			③ Joint A ID9.52 2 pieces Flare joint (for indoor unit side connection) Joint B 1 piece OD15.88 ID12.7 Joint D 1 piece ID12.7 OD9.52

Symbol ① to ④ in the drawing shows the symbols of branch piping parts in the chart respectively.

Branch piping should always be arranged to have level or perpendicular position.


Notes

- (1) When 40-60 models of indoor units are applied to this combination, the reducer ③ supplied with the branch piping set should be used in order to reduce the liquid piping size from ø9.52mm to ø6.35mm at indoor unit side (flare connection). Accordingly be sure to select the liquid piping size ø9.52mm from branch to indoor unit.
- (2) The reducer ④ is for FDC71 and 100 models only.


ID stands for inner diameter and OD, outer diameter.

The branch piping (both gas and liquid lines) should always be arranged to have a level or perpendicular position.

2-Way Branch




Mount — sections level with the floor.




Mount — sections perpendicular to the floor.


3-Way Branch



Floor






















Floor




Floor

Indoor units















BENEFITS SUMMARY

		FDT	FDTc	FDU	FDUM	SRK	FDE	FDF	
									
Energy-Saving 	 Inverter Technology Inverter control technology delivers high efficiency and a smooth operation from high speed to low speed. A smooth sine voltage wave is attained.	●	●	●	●	●	●	●	
	 Energy-Saving Operation * Since the capacity is controlled automatically based on the outdoor temperature, energy can be saved without losing comfort.	●	●	●	●	●	●	●	●
	 Motion Sensor * This sensor detects human activity and shifts the temperature setting according to the amount of activity in the room.	● Option	● Option	● Option	● Option		● Option	● Option	
	 Home Leave Operation This function ensures that when the room is unoccupied for long periods of time, the unit will maintain a moderate indoor temperature, avoiding extremely hot or cool temperatures.	●	●	●	●	●	●	●	●
	 Set Temperature Auto Return * This function allows the user to program a preferred set temperature that the unit will return to each time it is operated.	●	●	●	●	●	●	●	●
Comfort 	 Automatic Operation This function automatically selects the required heating or cooling function based on the current room conditions.	●	●	●	●	●	●	●	
	 Silent Operation This function allows the user to program periods where the unit will operate with reduced noise levels, perfect for night time and an uninterrupted sleep.	●	●	●	●	●	●	●	●
	 Hi Power Operation Use the high power function to quickly reach your optimum temperature level when you first turn on the unit. This function will operate for a maximum of 15 minutes before returning to normal operation.	●	●	●	●	●	●	●	●
Air Flow 	 Flap Control System This function allows the user to set the upper and lower limit positions of the flap at each air outlet individually, providing you with complete control over interior air flow.	●	●			●	●		
	 Auto Swing The louvers on your unit will move up and down continuously during operation. This function allows you to set the up/down swing position of the louver to the preferred operation angle.	●	●			●	●	●	
	 Draft Prevention Setting * Draft Prevention setting provides a comfortable air flow without any draft feeling. Whether cooling or heating a room, the remote control can be used to instantly suppress any warm or cool drafts. This accurately assists how air flow is directed out of the indoor unit.	● Option	● Option						
	 Automatic Fan Speed The unit's on-board microcomputer continuously monitors the room's air temperature and adjusts the air flow automatically.	●	●	●	●	●	●	●	●

When using RC-EX3D (Remote control), functions with symbol  are available.

However, for RC-E5 (Remote control), functions with * are not available.

FDT	FDTC	FDU	FDUM	SRK	FDE	FDL	FDT	FDTC	FDU	FDUM	SRK	FDE	FDL
													
P22	P38	P46	P56	P70	P78	P92							

		FDT	FDTC	FDU	FDUM	SRK	FDE	FDL
Timer 	 Sleep Timer This function allows the user to set a pre-determined amount of time between 30 and 240 minutes that your unit will operate for before switching off.	●	●	●	●	●	●	●
	 Peak-Cut Timer * This function lets the user to preset the capacity limit during certain periods of the day, minimising energy consumption during peak billing times, thus reducing operation costs.	●	●	●	●	●	●	●
	 Weekly Timer Set the unit to turn on and off automatically on a weekly basis to suit your usual room usage on each day.	●	●	●	●	●	●	●
Convenience 	 Function Switch * From the seven available functions on the unit, this function allows the user to set two functions to operate automatically.	●	●	●	●	●	●	●
	 Favourite Setting * Operation mode, set temperature, fan speed and air flow direction automatically adjust to the programmed favourite setting.	●	●	●	●	●	●	●
	 Select the Language * Set the language to be displayed on the remote control.	●	●	●	●	●	●	●
	 Air Filter The air filter in the unit traps and removes airborne dust particles and other allergens to provide you clean air.	●	●	Procure locally	● Option	●	●	●
	 Filter Sign This warning alerts when the filter needs to be cleaned.	●	●	●	●	●	●	●
	 Outside Air Intake This function provides clean fresh air into the room through the external air intake, avoiding the constant recycling of internal air.	●	●	●	●			
	 Self Diagnostics The internal microcomputer automatically runs a diagnostic of the system in the event of a malfunction. This enables authorised dealers to isolate and repair any issues.	●	●	●	●	●	●	●
Others	 Built in Drain Pump The built-in drain pump, allows greater flexibility with installation, offering a great solution for applications with limited space.	●	●	● *1	●			
	 Improved Serviceability The fan unit (comprised of impeller and motor) is easily accessible from either the side or bottom of the unit and can be slid out for easy maintenance.			●	●			


*1 : Except 200 • 250 • 280

FDT

Indoor Unit Ceiling Cassette -4way-



FDT 40/50/60/71/100/125/140

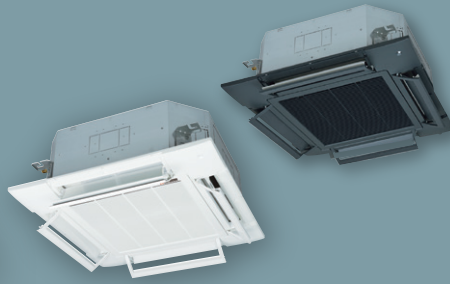

Draft Prevention Panel (Option)



Energy Saving



Home Leave



Hi Power



Silent Operation



Flap Control



Favourite Setting



Remote control (Option)

Wired



RC-EX3D



RC-E5



RC-ES1



RCH-E3

Wireless




RCN-T-5BW-E2(White)
RCN-T-5BB-E2(Black)

*Not all functions available with all remote control options.

Draft Prevention Panel (Option)

This prevents cold/hot draft being blown directly on the user. It is possible to set Draft Prevention Panel for each air outlet.

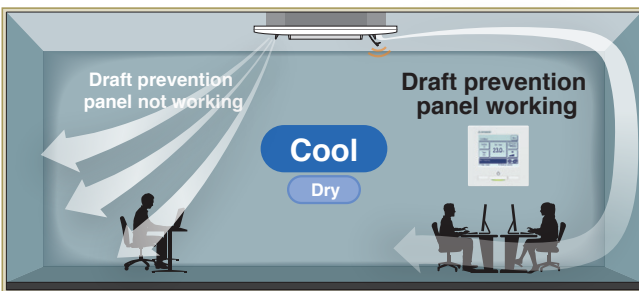


User can position panels by using the remote controller only (RC-EX3D, Wireless kit) when Draft Prevention Panel is available.

Motion Sensor (Option)

Motion sensor is equipped in the corner of the panel and detects the presence/absence and activity of humans in a room to improve the comfort and energy saving performance of the unit.





LB-T-5BW-E(White)
LB-T-5BB-E(Black)

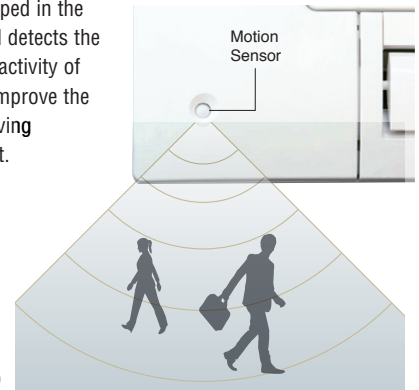


Individual Flap Control System

According to room conditions, four directions of air flow can be controlled individually by utilizing the flap control system. Individual flap control is available even after installation.

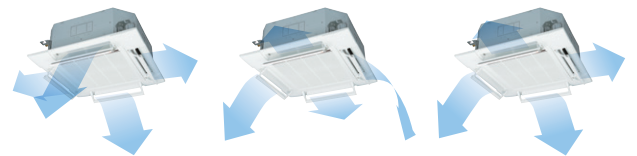


Flap can swing within an upper and lower flap range position within can be selected with a wired remote control.


* The wireless remote control is not applicable to the Individual flap control system.



For person who is far from the indoor unit




For both persons who are feeling hot or cold




Can cool both the kitchen and the guests

Reduced Noise

New technology has achieved low noise (in cooling) while keeping capacity and comfort.

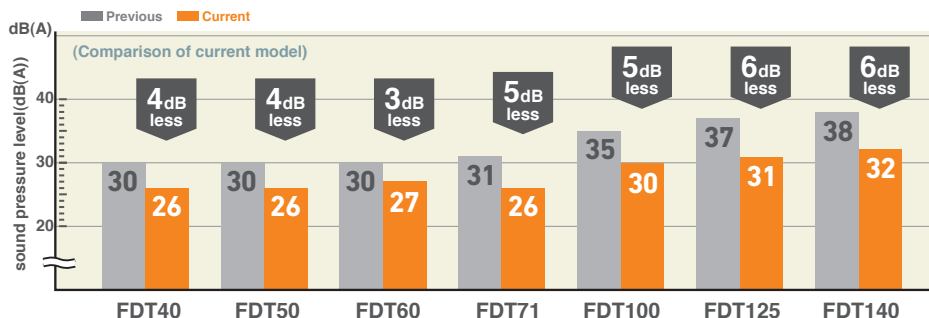


Panel Select Pattern (Option)

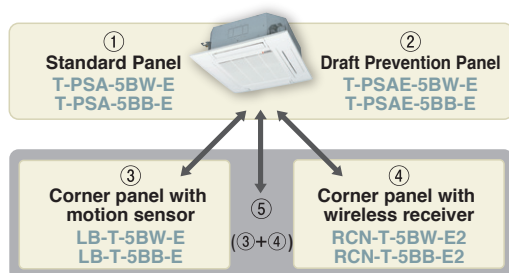

8 patterns of panel are available.

- ① Standard Panel only
- ①+③ Standard Panel with corner panel with motion sensor
- ①+④ Standard Panel with corner panel with wireless receiver
- ①+⑤ Standard Panel with corner panel with motion sensor & corner panel with wireless receiver
- ② Draft Prevention Panel only
- ②+③ Draft Prevention Panel with corner panel with motion sensor
- ②+④ Draft Prevention Panel with corner panel with wireless receiver
- ②+⑤ Draft Prevention Panel with corner panel with motion sensor & corner panel with wireless receiver


Installation position of Wireless kit and Motion sensor kit

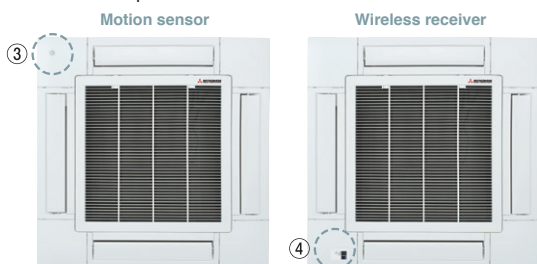

*Wireless receiver and Motion sensor can be installed to the position as shown

Suitable for High ceilings


The Powerful blowout carries comfortable air flow to the floor even in high ceiling applications. It is ideal for high ceiling offices, stores, etc., with a wide, uniform air flow throughout the room.

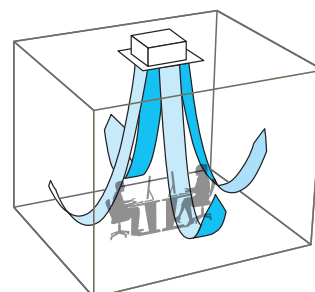

850mm Drain Pump

Drain can be discharged upward by 850mm from the ceiling surface close to the indoor unit.

It allows a piping layout with a high degree of freedom depending on the installation location.

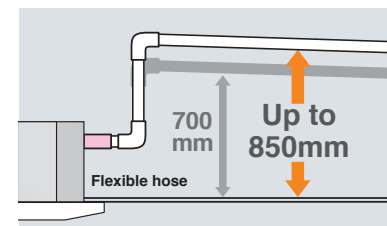

OUTDOOR UNIT

		Hyper Inverter		
SRC · FDC		40ZSX-W1,50-60ZSX-W3	71VNX-W	100-140VN(S)X-W
		—	—	100-140VN(S)X
model				
Chargeless		15m	30m	
Height x Width x Depth (mm)		640 x 800(+71) x 290	750 x 880(+88) x 340	1300 x 970 x 370

		Micro Inverter			Standard Inverter		
FDC		100-140VN(S)A-W	—	200·250·280VSA-W	71VNP-W	90·100VNP-W	125VNP-W
		100-140VN(S)A	200VSA	250VSA	—	—	—
model							
Chargeless		30m			15m		
Height x Width x Depth (mm)		845 x 970 x 370	1300 x 970 x 370	1505 x 970 x 370	640 x 800(+71) x 290	750 x 880(+88) x 340	845 x 970 x 370

Easy and quick installation and maintenance

Serviceability & Workability



Quick positioning !

Indoor unit is easily positioned and installed

1 Adjustable easier positioning of unit by new slits. FDT



New shape of slit is suitable to install the unit with more flexibility, compatible with many kinds of suspending bolt pitch on site. Any rectangular or squared pitch of suspending bolts are available with this slit.

Compatible with both square or rectangular bolt pitch



2 New slit in panel allows easier installation on site. FDT FDTC

Flexible positioning is available, which helps adjusting the direction of panel accordingly to lines or pattern on the ceiling.




4 long slits are available.

Quick installation and maintenance

1 Easy access to component part for easy maintenance. FDT


1. The control box and bell mouth can be removed together.

2. Easy access to impeller and fan motor.

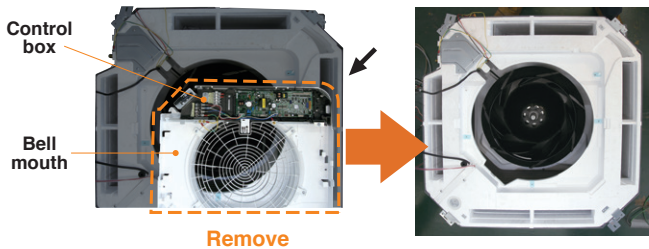

2 New shape of path of wiring. FDT


New shape of path gives easy wiring work for installation.

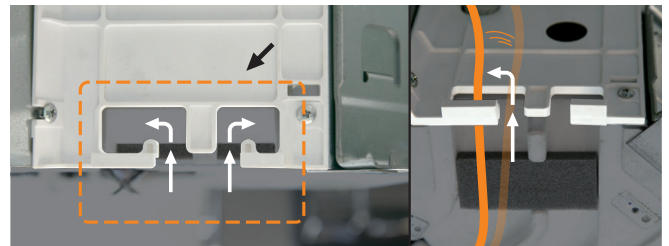

Easy wiring work

3 No need to remove screws to open the controller cover. FDT

It is possible to loose and slide open the cover without removing the screws. This prevents the cover from falling and causing damage on site.

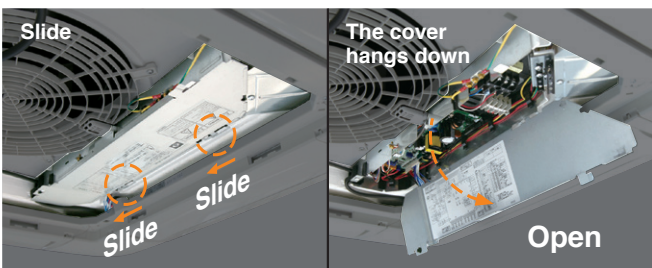


No need to remove screws



4 Safer installation by stopper of washer FDT FDTC

When unit is installed with hook between washers, this stopper helps to install the unit safely, without adjusting washer.

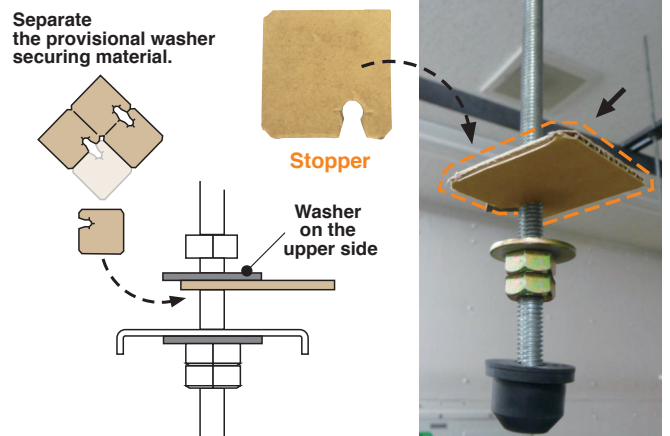



Builder



Maintenance



FDT



FDTC

For smooth and easy working


Good help for installation and maintenance

1 Easy and flexible hook to remove the filter

FDT
FDTC

Hook of soft material helps to remove the filter without dust spreading.

Press the filter tab to the outside and remove the filter.





Soft material

2 Securely fix the corner lid by strap

FDT

The direction of the strap hook part has been changed from longitudinal to lateral. Furthermore, a barb has been added to the hook pin to prevent the strap from coming off.

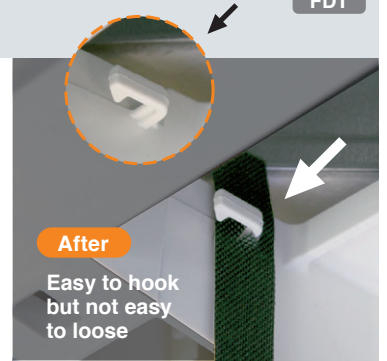

After


Easy to hook but not easy to loose

3 Drain-up-lift increases up to 850 mm

FDT
FDTC

The drain can be lifted up to 850 mm from the ceiling surface.

	Previous	New
FDT	700	850
FDTC	600	850

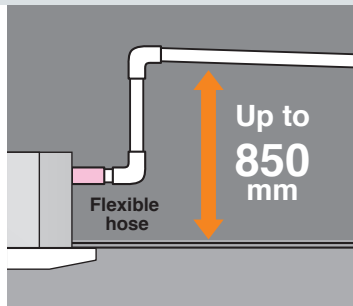


Up to 850 mm

4 New port to check drain water flow

FDT


A water supply port has been provided in the piping lid for easier testing of the drain water flow. (The port is usually sealed with a rubber cap.)

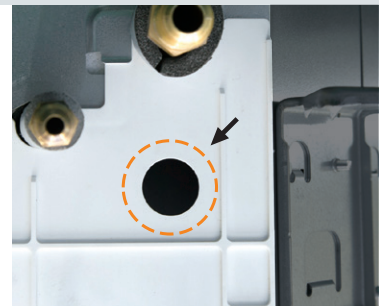

5 Re-use of packages during construction work

FDT
FDTC

Package material (carton) helps to protect the unit from unexpected welding spatter or dust on the new unit.


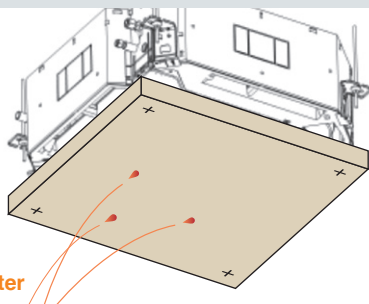


Spatter

6 More flexible outlet for ducting

FDT
FDTC

Both $\phi 125$ and $\phi 200$ (oval shaped) are available.

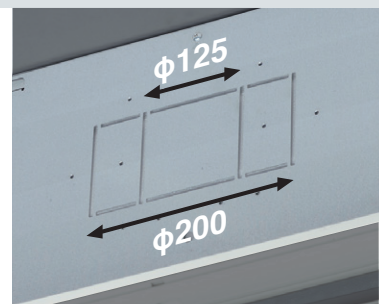




7 Easy check of drain pan

FDT
FDTC

Easy inspection of the condition of the drain pan is possible by removing only the corner lid.




Remove corner lid. Remove drain cap cover and check the condition. It is necessary to clean-up, firstly remove the rubber stopper to drain water out and secondly remove the drain cap.

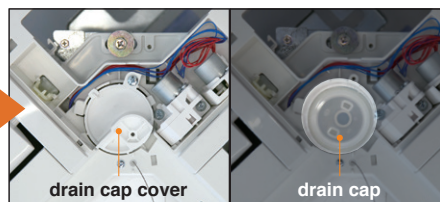


Clean up the area around the drain pump port.

DIMENSIONS (Unit:mm) - FDT -

Models FDT40VH, 50VH, 60VH, 71VH

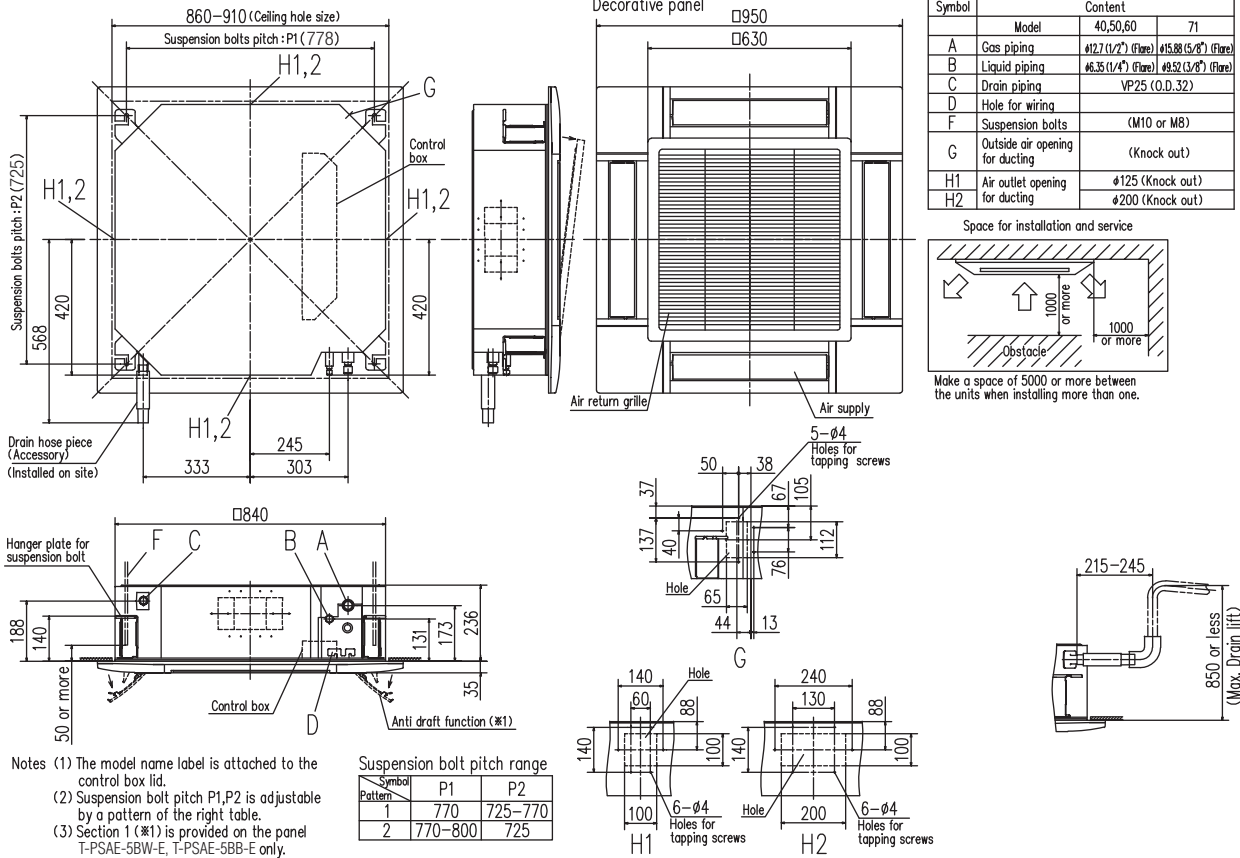

Models FDT100VH, 125VH, 140VH

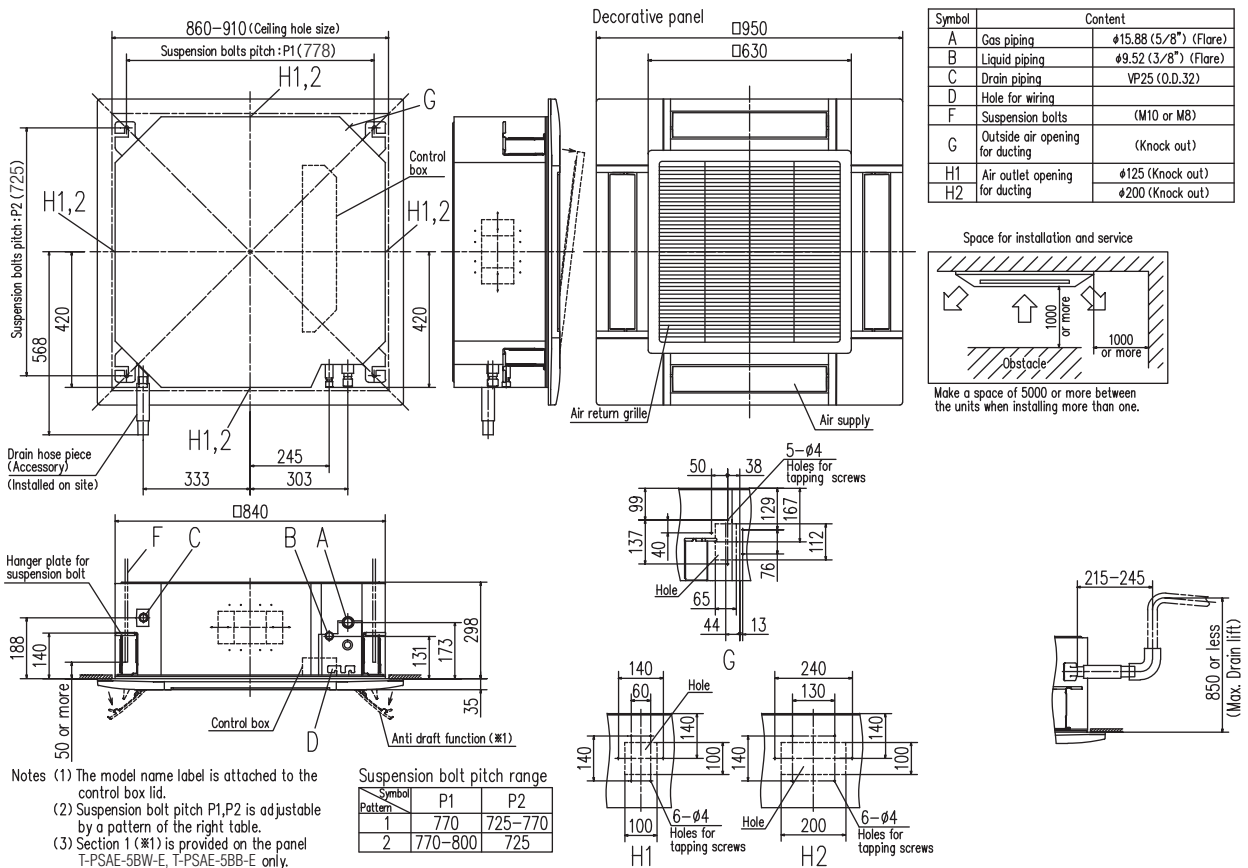

R32		Hyper Inverter				
Set model name		FDT40ZSXW1VH	FDT50ZSXW3VH	FDT60ZSXW3VH	FDT71VNXWVH	
Indoor unit		FDT40VH	FDT50VH	FDT60VH	FDT71VH	
Outdoor unit		SRC40ZSX-W1	SRC50ZSX-W3	SRC60ZSX-W3	FDC71VNX-W	
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz				
Nominal cooling capacity (Min - Max)		kW 4.0 (1.1 - 4.7)	5.0 (1.1 - 5.6)	5.6 (1.1 - 6.3)	7.1 (3.2 - 8.0)	
Nominal heating capacity (Min - Max)		kW 4.5 (0.6 - 5.4)	5.4 (0.6 - 6.3)	6.7 (0.6 - 6.7)	8.0 (3.6 - 9.0)	
Power consumption	Cooling/Heating	kW 0.890 / 1.03	1.29 / 1.31	1.33 / 1.56	1.69 / 1.75	
EER/COP	Cooling/Heating	4.49 / 4.37	3.88 / 4.12	4.21 / 4.29	4.20 / 4.58	
Inrush current	A	5	5	5	5	
Max. current		15	15	15	19.1	
Sound power level*1	Indoor	Cooling/Heating	50 / 50	55 / 56	58 / 59	59 / 60
	Outdoor	Cooling/Heating	63 / 62	63 / 62	65 / 65	66 / 66
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	36 / 33 / 30 / 26	41 / 33 / 30 / 26	44 / 34 / 30 / 27	46 / 34 / 31 / 26
		Heating (P-Hi/Hi/Me/Lo)	36 / 33 / 28 / 20	42 / 33 / 28 / 20	44 / 34 / 30 / 23	46 / 34 / 31 / 26
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	19 / 16 / 13 / 10	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12
		Heating (P-Hi/Hi/Me/Lo)	19 / 16 / 13 / 10	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12
	Outdoor	Cooling/Heating	33 / 33	39 / 33	41.5 / 39	60 / 50
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 236 x 840 x 840 Panel: 35 x 950 x 950			
	Outdoor		640 x 800(+71) x 290		750 x 880(+88) x 340	
Net weight	Indoor		24(Unit:19 Standard Panel:5)		26(Unit:21 Standard Panel:5)	
	Outdoor		45		60	
Ref.piping size	Liquid/Gas	ømm	6.35(1/4") / 12.7(1/2")		9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.30		Max.50	
Vertical height differences	Outdoor is higher/lower		Max.20 / Max.20		Max.30 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 46*2		-15 to 50*2	
	Heating	°CWB	-20 to 20			
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)			
Air filter, Q'ty			Pocket plastic net x 1(Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2			

R32		Hyper Inverter			
Set model name		FDT100VNXWVH	FDT125VNXWVH	FDT140VNXWVH	
Indoor unit		FDT100VH	FDT125VH	FDT140VH	
Outdoor unit		FDC100VNX-W	FDC125VNX-W	FDC140VNX-W	
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)		kW 10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)	
Nominal heating capacity (Min - Max)		kW 11.2 (2.7 - 12.5)	14.0 (2.7 - 17.0)	16.0 (2.7 - 18.0)	
Power consumption	Cooling/Heating	kW 2.28 / 2.48	3.21 / 3.43	3.87 / 4.20	
EER/COP	Cooling/Heating	4.38 / 4.52	3.89 / 4.08	3.62 / 3.81	
Inrush current	A	5	5	5	
Max. current		25	27	27	
Sound power level*1	Indoor	Cooling/Heating	62 / 62	63 / 64	63 / 64
	Outdoor	Cooling/Heating	67 / 67	68 / 70	69 / 71
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 30	48 / 41 / 39 / 31	48 / 42 / 39 / 32
		Heating (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 29	48 / 41 / 38 / 31	48 / 41 / 38 / 31
Air flow	Indoor	Cooling/Heating	53 / 51	53 / 54	54 / 54
			37 / 26 / 23 / 17	38 / 28 / 25 / 18	38 / 29 / 26 / 19
	Outdoor	Cooling/Heating	37 / 26 / 23 / 17	38 / 28 / 25 / 18	38 / 29 / 26 / 19
	Outdoor	Cooling/Heating	100 / 100	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 298 x 840 x 840 Panel: 35 x 950 x 950		
	Outdoor		1300 x 970 x 370		
Net weight	Indoor		30(Unit:25 Standard Panel:5)		
	Outdoor		97		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max.100		
Vertical height differences	Outdoor is higher/lower		Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2		
	Heating	°CWB	-20 to 20		
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)		
Air filter, Q'ty			Pocket plastic net x 1(Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2		

NOTES:

The data are measured under the following conditions(ISO-T1, -H1).
 Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
 *1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 *2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

SPECIFICATIONS -FDT-

R32		Hyper Inverter		
Set model name		FDT100VSXWVH	FDT125VSXWVH	FDT140VSXWVH
Indoor unit		FDT100VH	FDT125VH	FDT140VH
Outdoor unit		FDC100VSX-W	FDC125VSX-W	FDC140VSX-W
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)	kW	11.2 (2.7 - 16.0)	14.0 (2.7 - 18.0)	16.0 (2.7 - 20.0)
Power consumption	Cooling/Heating	2.28 / 2.48	3.21 / 3.43	3.87 / 4.20
EER/COP	Cooling/Heating	4.38 / 4.52	3.89 / 4.08	3.62 / 3.81
Inrush current		5	5	5
Max. current		14	14	14
Sound power level*1	Indoor	Cooling/Heating	62 / 62	63 / 64
	Outdoor	Cooling/Heating	67 / 67	69 / 71
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 30	48 / 41 / 39 / 31
		Heating (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 29	48 / 41 / 38 / 31
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	37 / 26 / 23 / 17	38 / 28 / 25 / 18
		Heating (P-Hi/Hi/Me/Lo)	37 / 26 / 23 / 17	38 / 28 / 25 / 18
	Outdoor	Cooling/Heating	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 298 x 840 x 840 Panel: 35 x 950 x 950	
	Outdoor		1300 x 970 x 370	
Net weight	Indoor		30(Unit:25 Standard Panel:5)	
	Outdoor		99	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.100	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2	
	Heating	°CWB	-20 to 20	
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)	
Air filter, Q'ty			Pocket plastic net x 1(Washable)	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2	

The values are for simultaneous Multi operation.

R32		Hyper Inverter				
Set model name		FDT71VNXWPVH	FDT100VNXWPVH	FDT125VNXWPVH	FDT140VNXWPVH	FDT140VNXWTVH
		Twin		Triple		
Indoor unit		FDT40VH x 2	FDT50VH x 2	FDT60VH x 2	FDT71VH x 2	FDT50VH x 3
Outdoor unit		FDC71VNX-W	FDC100VNX-W	FDC125VNX-W	FDC140VNX-W	FDC140VNX-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz				
Nominal cooling capacity (Min - Max)	kW	7.1 (3.2 - 8.0)	10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)	14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)	kW	8.0 (3.6 - 9.0)	11.2 (2.7 - 12.5)	14.0 (2.7 - 17.0)	16.0 (2.7 - 18.0)	16.0 (2.7 - 18.0)
Power consumption	Cooling/Heating	1.61 / 1.83	2.30 / 2.64	2.98 / 3.03	3.44 / 3.64	3.48 / 3.74
EER/COP	Cooling/Heating	4.40 / 4.38	4.35 / 4.25	4.19 / 4.62	4.07 / 4.40	4.02 / 4.28
Inrush current		5	5	5	5	5
Max. current		19.1	25	27	27	27
Sound power level*1	Indoor*3	Cooling/Heating	50 / 50	55 / 56	58 / 59	59 / 60
	Outdoor	Cooling/Heating	66 / 66	67 / 67	68 / 70	69 / 71
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	36 / 33 / 30 / 26	41 / 33 / 30 / 26	44 / 34 / 30 / 27	46 / 34 / 31 / 26
		Heating (P-Hi/Hi/Me/Lo)	36 / 33 / 28 / 20	42 / 33 / 28 / 20	44 / 34 / 30 / 23	46 / 34 / 31 / 26
Air flow	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	19 / 16 / 13 / 10	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12
		Heating (P-Hi/Hi/Me/Lo)	19 / 16 / 13 / 10	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12
	Outdoor	Cooling/Heating	60 / 50	100 / 100	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 236 x 840 x 840 Panel: 35 x 950 x 950			
	Outdoor		750 x 880(+88) x 340	1300 x 970 x 370		
Net weight	Indoor		24(Unit:19 Standard Panel:5)		26(Unit:21 Standard Panel:5)	
	Outdoor		60		97	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m	Max. 50	Max. 100		
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15	Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2			
	Heating	°CWB	-20 to 20			
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)			
Air filter, Q'ty			Pocket plastic net x 1(Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2			

NOTES:

The data are measured under the following conditions(R32:ISO-T1,-H1 / R410A:ISO-T1).

Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

*3 : The values are for one indoor unit operation. (Multi system only)

The values are for simultaneous Multi operation.

R32		Hyper Inverter				
Set model name		FDT100VSXWPVH	FDT125VSXWPVH	FDT140VSXWPVH	FDT140VSXWTVH	
		Twin		Triple		
Indoor unit		FDT50VH x 2	FDT60VH x 2	FDT71VH x 2	FDT50VH x 3	
Outdoor unit		FDC100VSX-W	FDC125VSX-W	FDC140VSX-W	FDC140VSX-W	
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz				
Nominal cooling capacity (Min - Max)	kW	10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)	14.0 (3.5 - 16.0)	
Nominal heating capacity (Min - Max)	kW	11.2 (2.7 - 16.0)	14.0 (2.7 - 18.0)	16.0 (2.7 - 20.0)	16.0 (2.7 - 20.0)	
Power consumption	Cooling/Heating	2.30 / 2.64	2.98 / 3.03	3.44 / 3.64	3.48 / 3.74	
EER/COP	Cooling/Heating	4.35 / 4.25	4.19 / 4.62	4.07 / 4.40	4.02 / 4.28	
Inrush current		5	5	5	5	
Max. current		14	14	14	14	
Sound power level*1	Indoor ³	Cooling/Heating	55 / 56	58 / 59	59 / 60	55 / 56
	Outdoor	Cooling/Heating	67 / 67	68 / 70	69 / 71	69 / 71
Sound pressure level*1	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	41 / 33 / 30 / 26	44 / 34 / 30 / 27	46 / 34 / 31 / 26	41 / 33 / 30 / 26
		Heating (P-Hi/Hi/Me/Lo)	42 / 33 / 28 / 20	44 / 34 / 30 / 23	46 / 34 / 31 / 26	42 / 33 / 28 / 20
	Outdoor	Cooling/Heating	53 / 51	53 / 54	54 / 54	54 / 54
Air flow	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12	22 / 16 / 13 / 10
		Heating (P-Hi/Hi/Me/Lo)	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12	22 / 16 / 13 / 10
	Outdoor	Cooling/Heating	100 / 100	100 / 100	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 236 x 840 x 840 Panel: 35 x 950 x 950			
	Outdoor		1300 x 970 x 370			
Net weight	Indoor	kg	24(Unit:19 Standard Panel:5)	26(Unit:21 Standard Panel:5)	24(Unit:19 Standard Panel:5)	
	Outdoor		99			
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m	Max.100			
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15			
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2			
	Heating	°CWB	-20 to 20			
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)			
Air filter, Q'ty			Pocket plastic net x 1(Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2			

R410A		Hyper Inverter			
Set model name		FDT100VNXVH	FDT125VNXVH	FDT140VNXVH	
Indoor unit		FDT100VH	FDT125VH	FDT140VH	
Outdoor unit		FDC100VNX	FDC125VNX	FDC140VNX	
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)	
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 17.0)	16.0 (4.0 - 18.0)	
Power consumption	Cooling/Heating	2.50 / 2.58	3.42 / 3.43	4.58 / 4.20	
EER/COP	Cooling/Heating	4.00 / 4.34	3.65 / 4.08	3.06 / 3.81	
Inrush current		5	5	5	
Max. current		24	26	26	
Sound power level*1	Indoor	Cooling/Heating	62 / 62	63 / 64	63 / 64
	Outdoor	Cooling/Heating	70 / 70	70 / 70	72 / 72
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 30	48 / 41 / 39 / 31	48 / 42 / 39 / 32
		Heating (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 29	48 / 41 / 38 / 31	48 / 41 / 38 / 31
	Outdoor	Cooling/Heating	48 / 50	48 / 50	49 / 52
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	37 / 26 / 23 / 17	38 / 28 / 25 / 18	38 / 29 / 26 / 19
		Heating (P-Hi/Hi/Me/Lo)	37 / 26 / 23 / 17	38 / 28 / 25 / 18	38 / 29 / 26 / 19
	Outdoor	Cooling/Heating	100 / 100	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 298 x 840 x 840 Panel: 35 x 950 x 950		
	Outdoor		1300 x 970 x 370		
Net weight	Indoor	kg	30(Unit:25 Standard Panel:5)		
	Outdoor		105		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max.100		
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 43*2		
	Heating	°CWB	-20 to 20		
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)		
Air filter, Q'ty			Pocket plastic net x 1(Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2		

SPECIFICATIONS -FDT-

R410A		Hyper Inverter		
Set model name		FDT100VSXVH	FDT125VSXVH	FDT140VSXVH
Indoor unit		FDT100VH	FDT125VH	FDT140VH
Outdoor unit		FDC100VSX	FDC125VSX	FDC140VSX
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 16.0)	14.0 (4.0 - 18.0)	16.0 (4.0 - 20.0)
Power consumption	Cooling/Heating	2.50 / 2.58	3.42 / 3.43	4.58 / 4.20
EER/COP	Cooling/Heating	4.00 / 4.34	3.65 / 4.08	3.06 / 3.81
Inrush current		5	5	5
Max. current		15	15	15
Sound power level*1	Indoor	Cooling/Heating	62 / 62	63 / 64
	Outdoor	Cooling/Heating	70 / 70	72 / 72
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 30	48 / 41 / 39 / 31
		Heating (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 29	48 / 41 / 38 / 31
Air flow	Indoor	Cooling/Heating	48 / 50	48 / 50
		Cooling (P-Hi/Hi/Me/Lo)	37 / 26 / 23 / 17	38 / 28 / 25 / 18
	Outdoor	Cooling/Heating	37 / 26 / 23 / 17	38 / 28 / 25 / 18
		Cooling/Heating	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 298 x 840 x 840 Panel: 35 x 950 x 950	
	Outdoor		1300 x 970 x 370	
Net weight	Indoor		30(Unit:25 Standard Panel:5)	
	Outdoor		105	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.100	
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 43*2	
	Heating	°CWB	-20 to 20	
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)	
Air filter, Q'ty			Pocket plastic net x 1(Washable)	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2	

The values are for simultaneous Multi operation.

R410A		Hyper Inverter			
Set model name		FDT100VNXPVH	FDT125VNXPVH	FDT140VNXPVH	FDT140VNXTVH
Indoor unit		FDT50VH x 2	Twin FDT60VH x 2	FDT71VH x 2	Triple FDT50VH x 3
Outdoor unit		FDC100VNX	FDC125VNX	FDC140VNX	FDC140VNX
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 17.0)	16.0 (4.0 - 18.0)	16.0 (4.0 - 18.0)
Power consumption	Cooling/Heating	2.56 / 2.67	3.26 / 3.22	3.88 / 3.74	3.93 / 4.00
EER/COP	Cooling/Heating	3.91 / 4.19	3.83 / 4.35	3.61 / 4.28	3.56 / 4.00
Inrush current		5	5	5	5
Max. current		24	26	26	26
Sound power level*1	Indoor*3	Cooling/Heating	55 / 56	58 / 59	59 / 60
	Outdoor	Cooling/Heating	70 / 70	70 / 70	72 / 72
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	41 / 33 / 30 / 26	44 / 34 / 30 / 27	46 / 34 / 31 / 26
		Heating (P-Hi/Hi/Me/Lo)	42 / 33 / 28 / 20	44 / 34 / 30 / 23	46 / 34 / 31 / 26
Air flow	Indoor*3	Cooling/Heating	48 / 50	48 / 50	49 / 52
		Cooling (P-Hi/Hi/Me/Lo)	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12
	Outdoor	Cooling/Heating	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12
		Cooling/Heating	100 / 100	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 236 x 840 x 840 Panel: 35 x 950 x 950		
	Outdoor		1300 x 970 x 370		
Net weight	Indoor		24(Unit:19 Standard Panel:5)	26(Unit:21 Standard Panel:5)	24(Unit:19 Standard Panel:5)
	Outdoor		105		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max. 100		
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 43*2		
	Heating	°CWB	-20 to 20		
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)		
Air filter, Q'ty			Pocket plastic net x 1(Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2		

NOTES:

The data are measured under the following conditions(R32:ISO-T1,-H1 / R410A:ISO-T1).

Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

*3 : The values are for one indoor unit operation. (Multi system only)

The values are for simultaneous Multi operation.

R410A			Hyper Inverter			
Set model name			FDT100VSPVH	FDT125VSPVH	FDT140VSPVH	FDT140VSTVH
			Twin		Triple	
Indoor unit			FDT50VH x 2	FDT60VH x 2	FDT71VH x 2	FDT50VH x 3
Outdoor unit			FDC100VSX	FDC125VSX	FDC140VSX	FDC140VSX
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)	kW		10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)	kW		11.2 (4.0 - 16.0)	14.0 (4.0 - 18.0)	16.0 (4.0 - 20.0)	16.0 (4.0 - 20.0)
Power consumption	Cooling/Heating	kW	2.56 / 2.67	3.26 / 3.22	3.88 / 3.74	3.93 / 4.00
EER/COP	Cooling/Heating		3.91 / 4.19	3.83 / 4.35	3.61 / 4.28	3.56 / 4.00
Inrush current		A	5	5	5	5
Max. current			15	15	15	15
Sound power level*1	Indoor*3	Cooling/Heating	55 / 56	58 / 59	59 / 60	55 / 56
	Outdoor	Cooling/Heating	70 / 70	70 / 70	72 / 72	72 / 72
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	41 / 33 / 30 / 26	44 / 34 / 30 / 27	46 / 34 / 31 / 26	41 / 33 / 30 / 26
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	42 / 33 / 28 / 20	44 / 34 / 30 / 23	46 / 34 / 31 / 26	42 / 33 / 28 / 20
Air flow	Indoor*3	Cooling/Heating	48 / 50	48 / 50	49 / 52	49 / 52
	Outdoor	Cooling (P-Hi/Hi/Me/Lo)	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12	22 / 16 / 13 / 10
		Heating (P-Hi/Hi/Me/Lo)	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12	22 / 16 / 13 / 10
	Outdoor	Cooling/Heating	100 / 100	100 / 100	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 236 x 840 x 840 Panel: 35 x 950 x 950			
	Outdoor		1300 x 970 x 370			
Net weight	Indoor		24(Unit:19 Standard Panel:5)	26(Unit:21 Standard Panel:5)		24(Unit:19 Standard Panel:5)
	Outdoor		105			
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m	Max.100			
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15			
Outdoor operating temperature range	Cooling	°CDB	-15 to 43*2			
	Heating	°CWB	-20 to 20			
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)			
Air filter, Q'ty			Pocket plastic net x 1(Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2			

R32			Micro Inverter			
Set model name			FDT100VNAVH	FDT125VNAVH	FDT140VNAVH	
Indoor unit			FDT100VH	FDT125VH	FDT140VH	
Outdoor unit			FDC100VNA-W	FDC125VNA-W	FDC140VNA-W	
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)	kW		10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	
Nominal heating capacity (Min - Max)	kW		11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	
Power consumption	Cooling/Heating	kW	2.73 / 2.54	4.05 / 3.59	4.79 / 4.18	
EER/COP	Cooling/Heating		3.66 / 4.41	3.09 / 3.90	2.84 / 3.71	
Inrush current		A	5	5	5	
Max. current			24	24	24	
Sound power level*1	Indoor	Cooling/Heating	62 / 62	63 / 64	63 / 64	
	Outdoor	Cooling/Heating	69 / 70	71 / 71	72 / 73	
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 30	48 / 41 / 39 / 31	48 / 42 / 39 / 32	
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 29	48 / 41 / 38 / 31	48 / 41 / 38 / 31	
Air flow	Indoor	Cooling/Heating	54 / 55	54 / 56	56 / 58	
	Outdoor	Cooling (P-Hi/Hi/Me/Lo)	37 / 26 / 23 / 17	38 / 28 / 25 / 18	38 / 29 / 26 / 19	
		Heating (P-Hi/Hi/Me/Lo)	37 / 26 / 23 / 17	38 / 28 / 25 / 18	38 / 29 / 26 / 19	
	Outdoor	Cooling/Heating	75 / 73	75 / 73	75 / 73	
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 298 x 840 x 840 Panel: 35 x 950 x 950			
	Outdoor		845 x 970 x 370			
Net weight	Indoor		30(Unit:25 Standard Panel:5)			
	Outdoor		77			
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m	Max.50			
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15			
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2			
	Heating	°CWB	-20 to 20			
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)			
Air filter, Q'ty			Pocket plastic net x 1(Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2			

SPECIFICATIONS -FDT-

R32		Micro Inverter		
Set model name		FDT100VSAWVH	FDT125VSAWVH	FDT140VSAWVH
Indoor unit		FDT100VH	FDT125VH	FDT140VH
Outdoor unit		FDC100VSA-W	FDC125VSA-W	FDC140VSA-W
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	2.73 / 2.54	4.05 / 3.59	4.79 / 4.18
EER/COP	Cooling/Heating	3.66 / 4.41	3.09 / 3.90	2.84 / 3.71
Inrush current		5	5	5
Max. current		15	15	15
Sound power level*1	Indoor	Cooling/Heating	62 / 62	63 / 64
	Outdoor	Cooling/Heating	69 / 70	71 / 71
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 30	48 / 41 / 39 / 31
		Heating (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 29	48 / 41 / 38 / 31
	Outdoor	Cooling/Heating	54 / 55	54 / 56
		Cooling (P-Hi/Hi/Me/Lo)	37 / 26 / 23 / 17	38 / 28 / 25 / 18
Air flow	Indoor	Heating (P-Hi/Hi/Me/Lo)	37 / 26 / 23 / 17	38 / 28 / 25 / 18
		Cooling/Heating	75 / 73	75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 298 x 840 x 840 Panel: 35 x 950 x 950	
	Outdoor		845 x 970 x 370	
Net weight	Indoor		30(Unit:25 Standard Panel:5)	
	Outdoor		78	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.50	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2	
	Heating	°CWB	-20 to 20	
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)	
Air filter, Q'ty			Pocket plastic net x 1(Washable)	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2	

The values are for simultaneous Multi operation.

R32		Micro Inverter			
Set model name		FDT100VNAWVH	FDT125VNAWVH	FDT140VNAWVH	FDT140VNAWTVH
Indoor unit		FDT50VH x 2	FDT60VH x 2	FDT71VH x 2	FDT50VH x 3
Outdoor unit		FDC100VNA-W	FDC125VNA-W	FDC140VNA-W	FDC140VNA-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	2.82 / 2.73	3.79 / 3.31	4.22 / 3.57	4.22 / 3.57
EER/COP	Cooling/Heating	3.55 / 4.11	3.30 / 4.23	3.22 / 4.34	3.22 / 3.88
Inrush current		5	5	5	5
Max. current		24	24	24	24
Sound power level*1	Indoor*3	Cooling/Heating	55 / 56	58 / 59	59 / 60
	Outdoor	Cooling/Heating	69 / 70	71 / 71	72 / 73
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	41 / 33 / 30 / 26	44 / 34 / 30 / 27	46 / 34 / 31 / 26
		Heating (P-Hi/Hi/Me/Lo)	42 / 33 / 28 / 20	44 / 34 / 30 / 23	46 / 34 / 31 / 26
	Outdoor	Cooling/Heating	54 / 55	54 / 56	56 / 58
		Cooling (P-Hi/Hi/Me/Lo)	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12
Air flow	Indoor*3	Heating (P-Hi/Hi/Me/Lo)	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12
		Cooling/Heating	75 / 73	75 / 73	75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 236 x 840 x 840 Panel: 35 x 950 x 950		
	Outdoor		845 x 970 x 370		
Net weight	Indoor		24(Unit:19 Standard Panel:5)	26(Unit:21 Standard Panel:5)	24(Unit:19 Standard Panel:5)
	Outdoor		77		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max.50		
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2		
	Heating	°CWB	-20 to 20		
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)		
Air filter, Q'ty			Pocket plastic net x 1(Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2		

NOTES:

The data are measured under the following conditions(ISO-T1, -H1).

Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

*3 : The values are for one indoor unit operation. (Multi system only)

The values are for simultaneous Multi operation.

R32			Micro Inverter			
Set model name			FDT100VSAWPVH	FDT125VSAWPVH	FDT140VSAWPVH	FDT140VSAWTVH
			Twin			Triple
Indoor unit			FDT50VH x 2	FDT60VH x 2	FDT71VH x 2	FDT50VH x 3
Outdoor unit			FDC100VSA-W	FDC125VSA-W	FDC140VSA-W	FDC140VSA-W
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)			kW 10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)			kW 11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)
Power consumption			Cooling/Heating kW 2.82 / 2.73	3.79 / 3.31	4.22 / 3.57	4.22 / 3.57
EER/COP			Cooling/Heating 3.55 / 4.11	3.30 / 4.23	3.22 / 4.34	3.22 / 3.88
Inrush current			A 5	5	5	5
Max. current			15	15	15	15
Sound power level*1	Indoor ⁺³	Cooling/Heating	55 / 56	58 / 59	59 / 60	55 / 56
	Outdoor	Cooling/Heating	69 / 70	71 / 71	72 / 73	72 / 73
Sound pressure level*1	Indoor ⁺³	Cooling (P-Hi/Hi/Me/Lo)	41 / 33 / 30 / 26	44 / 34 / 30 / 27	46 / 34 / 31 / 26	41 / 33 / 30 / 26
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	42 / 33 / 28 / 20	44 / 34 / 30 / 23	46 / 34 / 31 / 26	42 / 33 / 28 / 20
Air flow	Indoor ⁺³	Cooling/Heating	m ³ /min 54 / 55	54 / 56	56 / 58	56 / 58
	Outdoor	Cooling/Heating	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12	22 / 16 / 13 / 10
Exterior dimensions	Indoor	HeightxWidthxDepth	mm Unit: 236 x 840 x 840 Panel: 35 x 950 x 950			
	Outdoor		845 x 970 x 370			
Net weight	Indoor		kg 24(Unit:19 Standard Panel:5)	26(Unit:21 Standard Panel:5)	24(Unit:19 Standard Panel:5)	
	Outdoor		78			
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m	Max.50			
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15			
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2			
	Heating	°CWB	-20 to 20			
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)			
Air filter, Q'ty			Pocket plastic net x 1(Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2			

The values are for simultaneous Multi operation.

R32			Micro Inverter		
Set model name			FDT200VSAWPVH	FDT250VSAWPVH	FDT280VSAWPVH
			Twin		
Indoor unit			FDT100VH x 2	FDT125VH x 2	FDT140VH x 2
Outdoor unit			FDC200VSA-W	FDC250VSA-W	FDC280VSA-W
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)			kW 20.0 (6.8 - 22.4)	25.0 (6.8 - 28.0)	27.0 (7.5 - 31.5)
Nominal heating capacity (Min - Max)			kW 22.4 (6.6 - 25.0)	28.0 (5.7 - 31.5)	30.0 (6.3 - 33.5)
Power consumption			Cooling/Heating kW 5.48 / 5.27	8.20 / 7.37	9.11 / 8.95
EER/COP			Cooling/Heating 3.65 / 4.25	3.05 / 3.80	2.96 / 3.35
Inrush current			A 5	5	5
Max. current			19	20	20
Sound power level*1	Indoor ⁺³	Cooling/Heating	62 / 62	63 / 64	63 / 64
	Outdoor	Cooling/Heating	72 / 74	73 / 75	75 / 77
Sound pressure level*1	Indoor ⁺³	Cooling (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 30	48 / 41 / 39 / 31	48 / 42 / 39 / 32
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 29	48 / 41 / 38 / 31	48 / 41 / 38 / 31
Air flow	Indoor ⁺³	Cooling/Heating	m ³ /min 58 / 59	58 / 62	61 / 63
	Outdoor	Cooling/Heating	37 / 26 / 23 / 17	38 / 28 / 25 / 18	38 / 29 / 26 / 19
Exterior dimensions	Indoor	HeightxWidthxDepth	mm Unit: 298 x 840 x 840 Panel: 35 x 950 x 950		
	Outdoor		1505 x 970 x 370		
Net weight	Indoor		kg 30(Unit:25 Standard Panel:5)		
	Outdoor		144	145	155
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 22.22(7/8")		
Refrigerant line (one way) length		m	Max.70		
Vertical height differences	Outdoor is higher/lower	m	Max.50*4 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2		
	Heating	°CWB	-20 to 20		
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)		
Air filter, Q'ty			Pocket plastic net x 1(Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2		

SPECIFICATIONS -FDT-

The values are for simultaneous Multi operation.

R32			Micro Inverter			
Set model name			FDT200VSAWTVH	FDT200VSAWDVH	FDT250VSAWDVH	FDT280VSAWDVH
			Triple	Double Twin		
Indoor unit			FDT71VH x 3	FDT50VH x 4	FDT60VH x 4	FDT71VH x 4
Outdoor unit			FDC200VSA-W	FDC200VSA-W	FDC250VSA-W	FDC280VSA-W
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)	kW		20.0 (7.6 - 22.4)	20.0 (6.8 - 22.4)	25.0 (5.2 - 28.0)	27.0 (7.5 - 31.5)
Nominal heating capacity (Min - Max)	kW		22.4 (6.6 - 25.0)	22.4 (6.6 - 25.0)	28.0 (7.2 - 31.5)	30.0 (6.3 - 33.5)
Power consumption	Cooling/Heating	kW	5.56 / 5.27	5.78 / 5.80	7.30 / 6.80	7.77 / 8.60
EER/COP	Cooling/Heating		3.60 / 4.25	3.46 / 3.86	3.42 / 4.12	3.47 / 3.49
Inrush current		A	5	5	5	5
Max. current			19	19	20	20
Sound power level*1	Indoor ⁺³	Cooling/Heating	59 / 60	55 / 56	58 / 59	59 / 60
	Outdoor	Cooling/Heating	72 / 74	72 / 74	73 / 75	75 / 77
Sound pressure level*1	Indoor ⁺³	Cooling (P-Hi/Hi/Me/Lo)	46 / 34 / 31 / 26	41 / 33 / 30 / 26	44 / 34 / 30 / 27	46 / 34 / 31 / 26
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	46 / 34 / 31 / 26	42 / 33 / 28 / 20	44 / 34 / 30 / 23	46 / 34 / 31 / 26
Air flow	Indoor ⁺³	Cooling/Heating	58 / 59	58 / 59	58 / 62	61 / 63
	Outdoor	Cooling/Heating	28 / 18 / 15 / 12	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 236 x 840 x 840 Panel: 35 x 950 x 950			
	Outdoor		1505 x 970 x 370			
Net weight	Indoor		26(Unit:21 Standard Panel:5)	24(Unit:19 Standard Panel:5)	26(Unit:21 Standard Panel:5)	
	Outdoor		144		145	155
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 22.22(7/8")		12.7(1/2") / 22.22(7/8")	
Refrigerant line (one way) length		m	Max.70			Max.60
Vertical height differences	Outdoor is higher/lower	m	Max.50*4 / Max.15			
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2			
	Heating	°CWB	-20 to 20			
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)			
Air filter, Q'ty			Pocket plastic net x 1(Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2			

R410A			Micro Inverter			
Set model name			FDT100VNAVH	FDT125VNAVH	FDT140VNAVH	
Indoor unit			FDT100VH	FDT125VH	FDT140VH	
Outdoor unit			FDC100VNA	FDC125VNA	FDC140VNA	
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)	kW		10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	
Nominal heating capacity (Min - Max)	kW		11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	
Power consumption	Cooling/Heating	kW	2.73 / 2.64	4.05 / 3.74	5.09 / 4.43	
EER/COP	Cooling/Heating		3.26 / 4.26	3.09 / 3.74	2.67 / 3.50	
Inrush current		A	5	5	5	
Max. current			24	24	24	
Sound power level*1	Indoor	Cooling/Heating	62 / 62	63 / 64	63 / 64	
	Outdoor	Cooling/Heating	70 / 70	71 / 71	73 / 73	
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 30	48 / 41 / 39 / 31	48 / 42 / 39 / 32	
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 29	48 / 41 / 38 / 31	48 / 41 / 38 / 31	
Air flow	Indoor	Cooling/Heating	54 / 56	55 / 57	57 / 59	
	Outdoor	Cooling/Heating	37 / 26 / 23 / 17	38 / 28 / 25 / 18	38 / 29 / 26 / 19	
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 298 x 840 x 840 Panel: 35 x 950 x 950			
	Outdoor		845 x 970 x 370			
Net weight	Indoor		30(Unit:25 Standard Panel:5)			
	Outdoor		80			
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m	Max.50			
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15			
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2			
	Heating	°CWB	-20 to 20			
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)			
Air filter, Q'ty			Pocket plastic net x 1(Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2			

NOTES:

The data are measured under the following conditions(R32 : ISO-T1, -H1 /, R410A:ISO-T1).

Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

*3 : The values are for one indoor unit operation. (Multi system only)

*4 : In case of following conditions:Max.50m(Outdoor unit is higher & Outdoor temperature ≤ 43°C), Max.30m(Outdoor unit is higher & Outdoor temperature > 43°C)

R410A		Micro Inverter		
Set model name		FDT100VSAVH	FDT125VSAVH	FDT140VSAVH
Indoor unit		FDT100VH	FDT125VH	FDT140VH
Outdoor unit		FDC100VSA	FDC125VSA	FDC140VSA
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	2.73 / 2.63	4.05 / 3.74	5.09 / 4.43
EER/COP	Cooling/Heating	3.66 / 4.26	3.09 / 3.74	2.67 / 3.50
Inrush current		5	5	5
Max. current		15	15	15
Sound power level*1	Indoor	Cooling/Heating	62 / 62	63 / 64
	Outdoor	Cooling/Heating	70 / 70	73 / 73
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 30	48 / 41 / 39 / 31
		Heating (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 29	48 / 41 / 38 / 31
	Outdoor	Cooling/Heating	54 / 56	55 / 57
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	37 / 26 / 23 / 17	38 / 28 / 25 / 18
		Heating (P-Hi/Hi/Me/Lo)	37 / 26 / 23 / 17	38 / 28 / 25 / 18
	Outdoor	Cooling/Heating	75 / 73	75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 298 x 840 x 840 Panel: 35 x 950 x 950	
	Outdoor		845 x 970 x 370	
Net weight	Indoor		30(Unit:25 Standard Panel:5)	
	Outdoor		82	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.50	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2	
	Heating	°CWB	-20 to 20	
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)	
Air filter, Q'ty			Pocket plastic net x 1(Washable)	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2	

The values are for simultaneous Multi operation.

R410A		Micro Inverter			
Set model name		FDT100VNAPVH	FDT125VNAPVH	FDT140VNAPVH	FDT140VNATVH
Indoor unit		FDT50VH x 2	FDT60VH x 2	FDT71VH x 2	FDT50VH x 3
Outdoor unit		FDC100VNA	FDC125VNA	FDC140VNA	FDC140VNA
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	2.82 / 2.90	3.79 / 3.31	4.22 / 3.72	4.22 / 3.29
EER/COP	Cooling/Heating	3.55 / 3.86	3.30 / 4.23	3.22 / 4.17	3.22 / 4.71
Inrush current		5	5	5	5
Max. current		24	24	24	24
Sound power level*1	Indoor*3	Cooling/Heating	55 / 56	58 / 59	59 / 60
	Outdoor	Cooling/Heating	70 / 70	71 / 71	73 / 73
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	41 / 33 / 30 / 26	44 / 34 / 30 / 27	46 / 34 / 31 / 26
		Heating (P-Hi/Hi/Me/Lo)	42 / 33 / 28 / 20	44 / 34 / 30 / 23	46 / 34 / 31 / 26
	Outdoor	Cooling/Heating	54 / 56	55 / 57	57 / 59
Air flow	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12
		Heating (P-Hi/Hi/Me/Lo)	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12
	Outdoor	Cooling/Heating	75 / 73	75 / 73	75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 236 x 840 x 840 Panel: 35 x 950 x 950		
	Outdoor		845 x 970 x 370		
Net weight	Indoor		24(Unit:19 Standard Panel:5)	26(Unit:21 Standard Panel:5)	24(Unit:19 Standard Panel:5)
	Outdoor		80		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max.50		
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2		
	Heating	°CWB	-20 to 20		
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)		
Air filter, Q'ty			Pocket plastic net x 1(Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2		

SPECIFICATIONS -FDT-

The values are for simultaneous Multi operation.

R410A		Micro Inverter			
Set model name		FDT100VSAPVH	FDT125VSAPVH	FDT140VSAPVH	FDT140VSATVH
		Twin		Triple	
Indoor unit		FDT50VH x 2	FDT60VH x 2	FDT71VH x 2	FDT50VH x 3
Outdoor unit		FDC100VSA	FDC125VSA	FDC140VSA	FDC140VSA
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	2.82 / 2.90	3.79 / 3.31	4.22 / 3.72	4.22 / 3.29
EER/COP	Cooling/Heating	3.55 / 3.86	3.30 / 4.23	3.22 / 4.17	3.22 / 4.71
Inrush current		5	5	5	5
Max. current		15	15	15	15
Sound power level*1	Indoor ³	Cooling/Heating	55 / 56	58 / 59	59 / 60
	Outdoor	Cooling/Heating	70 / 70	71 / 71	73 / 73
Sound pressure level*1	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	41 / 33 / 30 / 26	44 / 34 / 30 / 27	46 / 34 / 31 / 26
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	42 / 33 / 28 / 20	44 / 34 / 30 / 23	46 / 34 / 31 / 26
Air flow	Indoor ³	Cooling/Heating	54 / 56	55 / 57	57 / 59
	Outdoor	Cooling/Heating	22 / 16 / 13 / 10	26 / 17 / 14 / 11	28 / 18 / 15 / 12
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 236 x 840 x 840 Panel: 35 x 950 x 950		
	Outdoor		845 x 970 x 370		
Net weight	Indoor		24(Unit:19 Standard Panel:5)	26(Unit:21 Standard Panel:5)	24(Unit:19 Standard Panel:5)
	Outdoor		82		
Ref.piping size	Liquid/Gas		9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length			Max.50		
Vertical height differences	Outdoor is higher/lower		Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2		
	Heating	°CWB	-20 to 20		
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)		
Air filter, Q'ty			Pocket plastic net x 1(Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2		

The values are for simultaneous Multi operation.

R410A		Micro Inverter		
Set model name		FDT200VSAPVH	FDT250VSAPVH	
		Twin		
Indoor unit		FDT100VH x 2	FDT125VH x 2	
Outdoor unit		FDC200VSA	FDC250VSA	
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	19.0 (5.2 - 22.4)	24.0 (6.9 - 28.0)	
Nominal heating capacity (Min - Max)	kW	22.4 (3.3 - 25.0)	27.0 (5.5 - 31.5)	
Power consumption	Cooling/Heating	6.25 / 6.02	8.36 / 7.15	
EER/COP	Cooling/Heating	3.04 / 3.72	2.87 / 3.78	
Inrush current		5	5	
Max. current		20	21	
Sound power level*1	Indoor ³	Cooling/Heating	62 / 62	
	Outdoor	Cooling/Heating	72 / 74	
Sound pressure level*1	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 30	
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	47 / 39 / 36 / 29	
Air flow	Indoor ³	Cooling/Heating	58 / 59	
	Outdoor	Cooling/Heating	37 / 26 / 23 / 17	
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 298 x 840 x 840 Panel: 35 x 950 x 950	
	Outdoor		1300 x 970 x 370	1505 x 970 x 370
Net weight	Indoor		30(Unit:25 Standard Panel:5)	
	Outdoor		115	143
Ref.piping size	Liquid/Gas		9.52(3/8") / 22.22(7/8")	
Refrigerant line (one way) length			Max.70	
Vertical height differences	Outdoor is higher/lower		Max.30 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2	
	Heating	°CWB	-15 to 20	
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)	
Air filter, Q'ty			Pocket plastic net x 1(Washable)	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2	

NOTES:

The data are measured under the following conditions(R32:ISO-T1, -H1 / R410A:ISO-T1).

Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

*3 : The values are for one indoor unit operation. (Multi system only)

The values are for simultaneous Multi operation.

R410A			Micro Inverter		
Set model name			FDT200VSATVH	FDT200VSADVH	FDT250VSADVH
			Triple		Double Twin
Indoor unit			FDT71VH x 3	FDT50VH x 4	FDT60VH x 4
Outdoor unit			FDC200VSA	FDC200VSA	FDC250VSA
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)		kW	19.0 (5.2 - 22.4)	19.0 (5.2 - 22.4)	24.0 (6.9 - 28.0)
Nominal heating capacity (Min - Max)		kW	22.4 (3.3 - 25.0)	22.4 (3.3 - 25.0)	27.0 (5.5 - 31.5)
Power consumption	Cooling/Heating	kW	6.01 / 5.76	6.26 / 6.15	7.43 / 6.83
EER/COP	Cooling/Heating		3.16 / 3.89	3.04 / 3.64	3.23 / 3.95
Inrush current		A	5	5	5
Max. current			20	20	21
Sound power level* ¹	Indoor ³	Cooling/Heating	59 / 60	55 / 56	58 / 59
	Outdoor	Cooling/Heating	72 / 74	72 / 74	73 / 75
Sound pressure level* ¹	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	46 / 34 / 31 / 26	41 / 33 / 30 / 26	44 / 34 / 30 / 27
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	46 / 34 / 31 / 26	42 / 33 / 28 / 20	44 / 34 / 30 / 23
Air flow	Indoor ³	Cooling/Heating	58 / 59	58 / 59	59 / 62
	Outdoor	Cooling/Heating	28 / 18 / 15 / 12	22 / 16 / 13 / 10	26 / 17 / 14 / 11
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 236 x 840 x 840 Panel: 35 x 950 x 950		
	Outdoor		1300 x 970 x 370		1505 x 970 x 370
Net weight	Indoor		26(Unit:21 Standard Panel:5)	24(Unit:19 Standard Panel:5)	26(Unit:21 Standard Panel:5)
	Outdoor		115		143
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 22.22(7/8")		12.7(1/2") / 22.22(7/8")
Refrigerant line (one way) length		m	Max.70		
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50* ²		
	Heating	°CWB	-15 to 20		
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)		
Air filter, Q'ty			Pocket plastic net x 1(Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2		

R32			Standard Inverter			
Set model name			FDT71VNPVH	FDT90VNPVH	FDT100VNPVH	FDT125VNPVH
Indoor unit			FDT71VH	FDT100VH	FDT100VH	FDT125VH
Outdoor unit			FDC71VNP-W	FDC90VNP-W	FDC100VNP-W	FDC125VNP-W
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)		kW	7.1 (1.5 - 7.3)	9.0 (2.1 - 9.5)	10.0 (2.1 - 10.2)	12.1 (5.0 - 12.1)
Nominal heating capacity (Min - Max)		kW	7.1 (1.1 - 7.3)	9.0 (1.7 - 9.5)	10.0 (1.7 - 10.4)	12.1 (4.0 - 13.3)
Power consumption	Cooling/Heating	kW	2.31 / 1.73	2.48 / 1.90	2.84 / 2.33	3.69 / 3.20
EER/COP	Cooling/Heating		3.07 / 4.10	3.63 / 4.74	3.52 / 4.29	3.28 / 3.78
Inrush current		A	5	5	5	5
Max. current			15.8	19	19	18
Sound power level* ¹	Indoor	Cooling/Heating	59 / 60	62 / 62	62 / 62	63 / 64
	Outdoor	Cooling/Heating	67 / 67	67 / 66	68 / 67	73 / 72
Sound pressure level* ¹	Indoor	Cooling (P-Hi/Hi/Me/Lo)	46 / 34 / 31 / 26	47 / 39 / 36 / 30	47 / 39 / 36 / 30	48 / 41 / 39 / 31
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	46 / 34 / 31 / 26	47 / 39 / 36 / 29	47 / 39 / 36 / 29	48 / 41 / 38 / 31
Air flow	Indoor	Cooling/Heating	54 / 54	55 / 53	56 / 54	57 / 57
	Outdoor	Cooling/Heating	28 / 18 / 15 / 12	37 / 26 / 23 / 17	36 / 26 / 23 / 17	38 / 28 / 25 / 18
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 236 x 840 x 840 Panel: 35 x 950 x 950			
	Outdoor		640 x 800(+71) x 290	750 x 880(+88) x 340		845 x 970 x 370
Net weight	Indoor		26(Unit:21 Standard Panel:5)	30(Unit:25 Standard Panel:5)		
	Outdoor		45	57		73
Ref.piping size	Liquid/Gas	ømm	6.35(1/4") / 12.7(1/2")		6.35(1/4") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.30			
Vertical height differences	Outdoor is higher/lower	m	Max.20 / Max.20			
Outdoor operating temperature range	Cooling	°CDB	-15 to 46* ²			
	Heating	°CWB	-15 to 20			
Panel			T-PSA-5BW-E, T-PSAE-5BW-E(White) / T-PSA-5BB-E, T-PSAE-5BB-E(Black)			
Air filter, Q'ty			Pocket Plastic net x1(Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-T-5BW-E2, RCN-T-5BB-E2			

FDTC

Indoor Unit Ceiling Cassette -4way Compact



FDTC 40/50/60



Draft Prevention Panel (Option)



- Energy Saving
- Home Leave
- Hi Power
- Silent Operation
- Flap Control
- Favourite Setting



Remote control (Option)



*Not all functions available with all remote control options.

European Design & Flat Panel

Unique Grille Design

A grille designed with a unique structure and a clean white panel that blends with the room.




Honeycomb type



Grid type

Integrated ceiling system design (600x600)

The weight is 14kg
Height of thin panel and main body is 248mm allowing adequate spacing for installation.

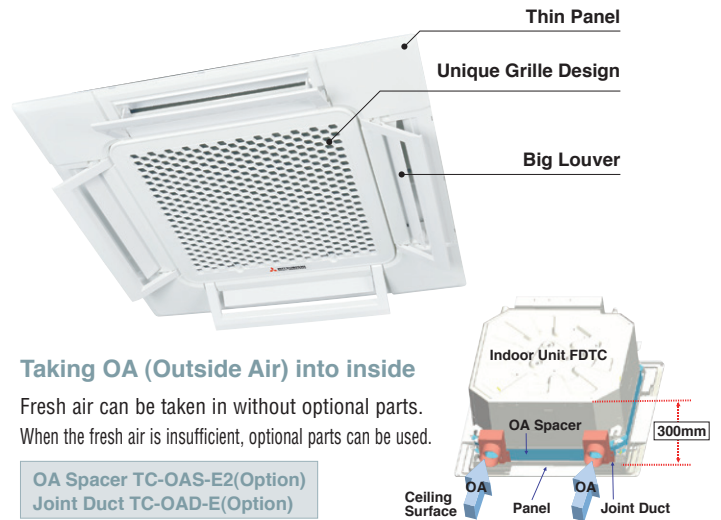


Taking OA (Outside Air) into inside

Fresh air can be taken in without optional parts.
When the fresh air is insufficient, optional parts can be used.

OA Spacer TC-OAS-E2(Option)
Joint Duct TC-OAD-E(Option)

Draft Prevention Panel (Option)

This prevents cold/hot draft being blown directly on the user. It is possible to set Draft Prevention Panel for each air outlet.

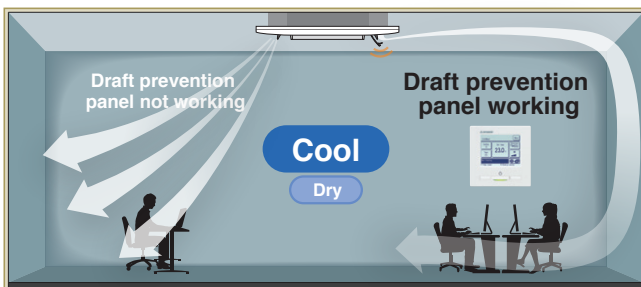


User can position panels by using the remote controller only (RC-EX3D, Wireless kit) when Draft Prevention Panel is available.

Motion Sensor (Option)


Motion sensor is equipped in the corner of the panel and detects the presence/absence and activity of humans in a room to improve the comfort and energy saving performance of the unit.



LB-TC-5W-E

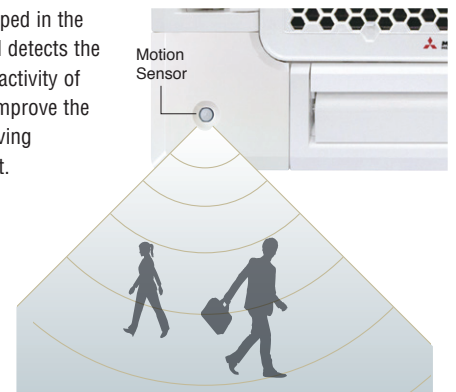




Individual Flap Control System



According to room temperature conditions, four directions of air flow can be controlled individually by following Flap control system. Individual flap control is available even after installation.


The flap can swing within the range of upper and lower flap position selected with wired remote control.

* The wireless remote control is not applicable to the Individual flap control system.




Quieter Operation

Adopting new turbo fan and improving new heat exchanger enables noise reduction.

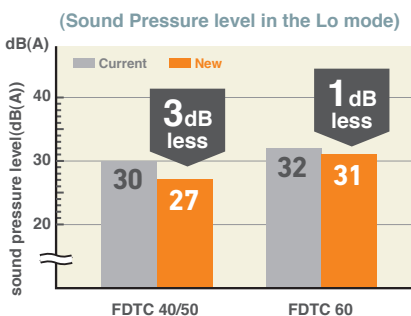


850mm Drain Pump

Drain can be discharged upward by 850mm from the ceiling surface close to the indoor unit. It allows a piping layout with a high degree of freedom depending on the installation location.

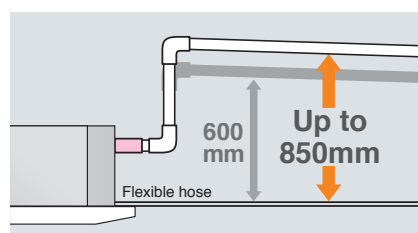


Suitable for High ceilings

The Powerful blowout carries comfortable air flow to the floor even in high ceiling applications. It is ideal for high ceiling offices, stores, etc., with a wide, uniform air flow throughout the room.



Panel Select Pattern (Option)

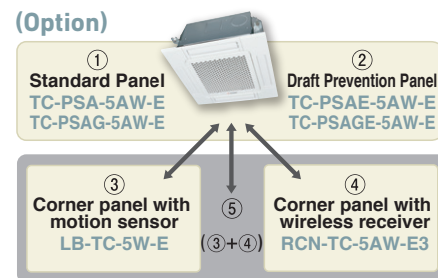

8 patterns of panel are available.



①	Standard Panel only
①+③	Standard Panel with corner panel with motion sensor
①+④	Standard Panel with corner panel with wireless receiver
①+⑤	Standard Panel with corner panel with motion sensor & corner panel with wireless receiver
②	Draft Prevention Panel only
②+③	Draft Prevention Panel with corner panel with motion sensor
②+④	Draft Prevention Panel with corner panel with wireless receiver
②+⑤	Draft Prevention Panel with corner panel with motion sensor & corner panel with wireless receiver

OUTDOOR UNIT


		Hyper Inverter		
SRC · FDC		40ZSX-W1,50-60ZSX-W3	71VNX-W	100-140VN(S)X-W
		—	—	100-140VN(S)X
model				
Chargeless		15m	30m	
Height x Width x Depth (mm)		640 x 800(+71) x 290	750 x 880(+88) x 340	1300 x 970 x 370

		Micro Inverter		
FDC		100-140VN(S)A-W	—	200-250VSA-W
		100-140VN(S)A	200VSA	250VSA
model				
Chargeless		30m		
Height x Width x Depth (mm)		845 x 970 x 370	1300 x 970 x 370	1505 x 970 x 370

DIMENSIONS (Unit:mm) - FDTC -

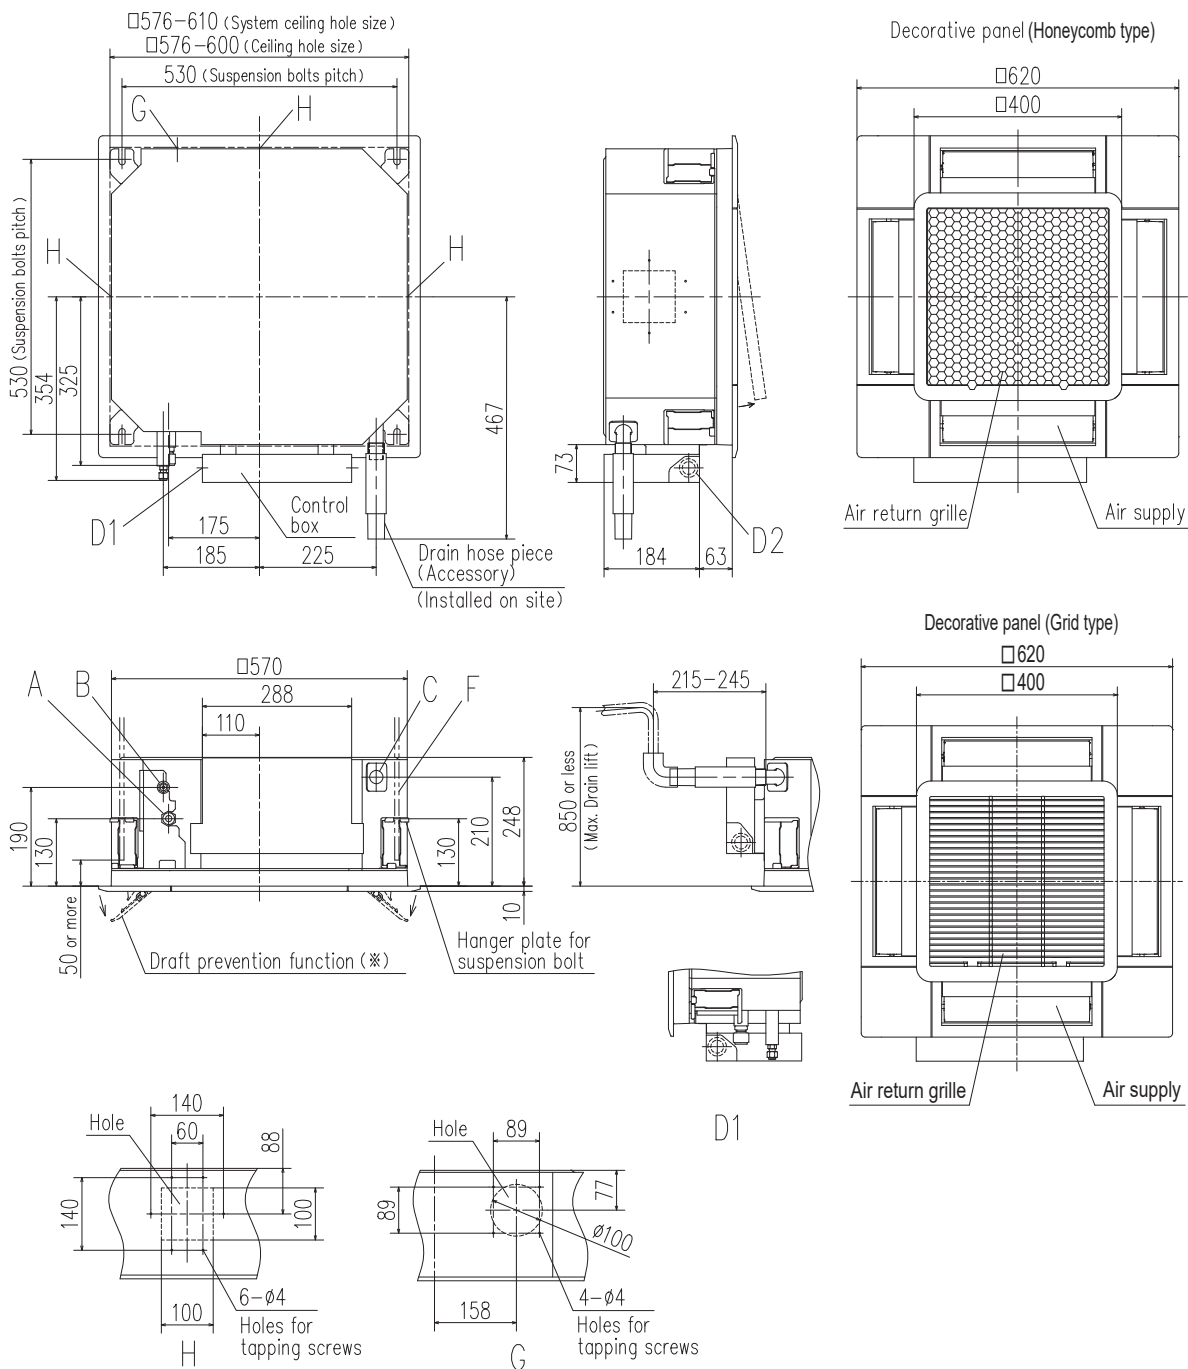



Make a space of 4000 or more between the units when installing more than one.





- Notes (1) The model name label is attached to the control box lid.
 (2) This unit is designed for 2x2 grid ceiling.
 If it is installed on a ceiling other than 2x2 grid ceiling, provide an inspection opening on the control box side.
 (3) Draft prevention function (※) is provided on the panel TC-PSAE-5AW-E, TC-PSAGE-5AW-E only.

Symbol	Content	
A	Gas piping	φ12.7 (1/2") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)
C	Drain piping	VP25 (O.D.32)
D1	Power supply connection	
D2	Remote control code and signal wiring connection	
F	Suspension bolts	(M10 or M8)
G	Outside air opening for ducting	(Knock out)
H	Air outlet opening for ducting	φ125 (Knock out)
J	Inspection opening	450X450

						
Set model name			FDTC40ZSXW1VH	FDTC50ZSXW3VH	FDTC60ZSXW3VH	
Indoor unit			FDTC40VH	FDTC50VH	FDTC60VH	
Outdoor unit			SRC40ZSX-W1	SRC50ZSX-W3	SRC60ZSX-W3	
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)			4.0 (1.1 - 4.7)	5.0 (1.1 - 5.6)	5.6 (1.1 - 6.3)	
Nominal heating capacity (Min - Max)			4.5 (0.6 - 5.4)	5.4 (0.6 - 6.3)	6.7 (0.6 - 6.7)	
Power consumption			0.98 / 1.13	1.40 / 1.53	1.73 / 2.14	
EER/COP			4.08 / 3.98	3.58 / 3.53	3.23 / 3.13	
Inrush current			5	5	5	
Max. current			15	15	15	
Sound power level*1	Indoor	Cooling/Heating	59 / 59	59 / 59	60 / 60	
	Outdoor	Cooling/Heating	63 / 62	63 / 62	65 / 65	
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	44 / 40 / 35 / 27	46 / 42 / 38 / 31	
		Heating (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	44 / 40 / 35 / 27	46 / 42 / 38 / 31	
	Outdoor	Cooling/Heating	52 / 50	52 / 50	53 / 54	
		Cooling (P-Hi/Hi/Me/Lo)	13 / 11 / 9 / 7	13 / 11 / 9 / 7	14 / 12 / 10 / 8	
Air flow	Indoor	Heating (P-Hi/Hi/Me/Lo)	13 / 11 / 9 / 7	13 / 11 / 9 / 7	14 / 12 / 10 / 8	
		Cooling/Heating	33 / 33	39 / 33	41.5 / 39	
	Outdoor	Cooling/Heating	33 / 33	39 / 33	41.5 / 39	
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 248 x 570 x 570 Panel: 10 x 620 x 620			
	Outdoor		640 x 800(+71) x 290			
Net weight	Indoor		16.5(Unit:14 Standard Panel:2.5)			
	Outdoor		45			
Ref.piping size	Liquid/Gas	ømm	6.35(1/4") / 12.7(1/2")			
Refrigerant line (one way) length			Max.30			
Vertical height differences			Outdoor is higher/lower			
Outdoor operating temperature range			Max.20 / Max.20			
			-15 to 46*2			
			-20 to 20			
Panel			TC-PSA-5AW-E, TC-PSAE-5AW-E(Honeycomb) / TC-PSAG-5AW-E, TC-PSAGE-5AW-E(Grid)			
Air filter, Q'ty			Pocket plastic net x 1(Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-TC-5AW-E3			

The values are for simultaneous Multi operation.

						
Set model name			FDTC71VNXWPVH	FDTC100VNXWPVH	FDTC125VNXWPVH	FDTC140VNXWTVH
			Twin		Triple	
Indoor unit			FDTC40VH x 2	FDTC50VH x 2	FDTC60VH x 2	FDTC50VH x 3
Outdoor unit			FDC71VNX-W	FDC100VNX-W	FDC125VNX-W	FDC140VNX-W
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)			7.1 (3.2 - 8.0)	10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)			8.0 (3.6 - 9.0)	11.2 (2.7 - 12.5)	14.0 (2.7 - 17.0)	16.0 (2.7 - 18.0)
Power consumption			1.73 / 1.83	2.60 / 3.04	3.67 / 4.05	3.96 / 4.34
EER/COP			4.12 / 4.37	3.84 / 3.69	3.41 / 3.45	3.54 / 3.69
Inrush current			5	5	5	5
Max. current			19.1	25	27	27
Sound power level*1	Indoor*3	Cooling/Heating	59 / 59	59 / 59	60 / 60	59 / 59
	Outdoor	Cooling/Heating	66 / 66	67 / 67	68 / 70	69 / 71
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	44 / 40 / 35 / 27	46 / 42 / 38 / 31	44 / 40 / 35 / 27
		Heating (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	44 / 40 / 35 / 27	46 / 42 / 38 / 31	44 / 40 / 35 / 27
	Outdoor	Cooling/Heating	51 / 51	53 / 51	53 / 54	54 / 54
		Cooling (P-Hi/Hi/Me/Lo)	13 / 11 / 9 / 7	13 / 11 / 9 / 7	14 / 12 / 10 / 8	13 / 11 / 9 / 7
Air flow	Indoor*3	Heating (P-Hi/Hi/Me/Lo)	13 / 11 / 9 / 7	13 / 11 / 9 / 7	14 / 12 / 10 / 8	13 / 11 / 9 / 7
		Cooling/Heating	60 / 50	100 / 100	100 / 100	100 / 100
	Outdoor	Cooling/Heating	60 / 50	100 / 100	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 248 x 570 x 570 Panel: 10 x 620 x 620			
	Outdoor		750 x 880(+88) x 340	1300 x 970 x 370		
Net weight	Indoor		16.5(Unit:14 Standard Panel:2.5)			
	Outdoor		60	97		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length			Max.50		Max.100	
Vertical height differences			Outdoor is higher/lower			
Outdoor operating temperature range			Max.30 / Max.15			
			Max.50 / Max.15			
			-15 to 50*2			
			-20 to 20			
Panel			TC-PSA-5AW-E, TC-PSAE-5AW-E(Honeycomb) / TC-PSAG-5AW-E, TC-PSAGE-5AW-E(Grid)			
Air filter, Q'ty			Pocket plastic net x 1(Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-TC-5AW-E3			

NOTES:

The data are measured under the following conditions(ISO-T1, -H1).
 Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
 *1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 *2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.
 *3 : The values are for one indoor unit operation. (Multi system only)

SPECIFICATIONS -FDTC-

The values are for simultaneous Multi operation.

R32		Hyper Inverter		
Set model name		FDTC100VSXWVPVH	FDTC125VSXWVPVH	FDTC140VSXWTVH
		Twin		Triple
Indoor unit		FDTC50VH x 2	FDTC60VH x 2	FDTC50VH x 3
Outdoor unit		FDC100VSX-W	FDC125VSX-W	FDC140VSX-W
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)	kW	11.2 (2.7 - 16.0)	14.0 (2.7 - 18.0)	16.0 (2.7 - 20.0)
Power consumption	Cooling/Heating	kW	2.60 / 3.04	3.67 / 4.05
EER/COP	Cooling/Heating		3.84 / 3.69	3.41 / 3.45
Inrush current		A	5	5
Max. current			14	14
Sound power level*1	Indoor*3	Cooling/Heating	59 / 59	60 / 60
	Outdoor	Cooling/Heating	67 / 67	68 / 70
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	46 / 42 / 38 / 31
		Heating (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	46 / 42 / 38 / 31
	Outdoor	Cooling/Heating	53 / 51	53 / 54
Air flow	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	13 / 11 / 9 / 7	14 / 12 / 10 / 8
		Heating (P-Hi/Hi/Me/Lo)	13 / 11 / 9 / 7	14 / 12 / 10 / 8
	Outdoor	Cooling/Heating	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 248 x 570 x 570 Panel: 10 x 620 x 620	
	Outdoor		1300 x 970 x 370	
Net weight	Indoor		16.5(Unit:14 Standard Panel:2.5)	
	Outdoor		99	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.100	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2	
	Heating	°CWB	-20 to 20	
Panel			TC-PSA-5AW-E, TC-PSAE-5AW-E(Honeycomb) / TC-PSAG-5AW-E, TC-PSAGE-5AW-E(Grid)	
Air filter, Q'ty			Pocket plastic net x 1(Washable)	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-TC-5AW-E3	

The values are for simultaneous Multi operation.

R410A		Hyper Inverter		
Set model name		FDTC100VNXVPVH	FDTC125VNXVPVH	FDTC140VNXTVH
		Twin		Triple
Indoor unit		FDTC50VH x 2	FDTC60VH x 2	FDTC50VH x 3
Outdoor unit		FDC100VNX	FDC125VNX	FDC140VNX
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 17.0)	16.0 (4.0 - 18.0)
Power consumption	Cooling/Heating	kW	2.80 / 3.50	4.10 / 4.10
EER/COP	Cooling/Heating		3.57 / 3.20	3.05 / 3.41
Inrush current		A	5	5
Max. current			24	26
Sound power level*1	Indoor*3	Cooling/Heating	59 / 59	60 / 60
	Outdoor	Cooling/Heating	70 / 70	70 / 70
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	46 / 42 / 38 / 31
		Heating (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	46 / 42 / 38 / 31
	Outdoor	Cooling/Heating	48 / 50	48 / 50
Air flow	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	13 / 11 / 9 / 7	14 / 12 / 10 / 8
		Heating (P-Hi/Hi/Me/Lo)	13 / 11 / 9 / 7	14 / 12 / 10 / 8
	Outdoor	Cooling/Heating	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 248 x 570 x 570 Panel: 10 x 620 x 620	
	Outdoor		1300 x 970 x 370	
Net weight	Indoor		16.5(Unit:14 Standard Panel:2.5)	
	Outdoor		105	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.100	
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 43*2	
	Heating	°CWB	-20 to 20	
Panel			TC-PSA-5AW-E, TC-PSAE-5AW-E(Honeycomb) / TC-PSAG-5AW-E, TC-PSAGE-5AW-E(Grid)	
Air filter, Q'ty			Pocket plastic net x 1(Washable)	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-TC-5AW-E3	

NOTES:

The data are measured under the following conditions(R32 : ISO-T1, -H1 / R410A : ISO-T1).

Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

*3 : The values are for one indoor unit operation. (Multi system only)

The values are for simultaneous Multi operation.

R410A		Hyper Inverter		
Set model name		FDTC100VSPVH	FDTC125VSPVH	FDTC140VSTVH
		Twin		Triple
Indoor unit		FDTC50VH x 2	FDTC60VH x 2	FDTC50VH x 3
Outdoor unit		FDC100VSX	FDC125VSX	FDC140VSX
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 16.0)	14.0 (4.0 - 18.0)	16.0 (4.0 - 20.0)
Power consumption	Cooling/Heating	kW	2.80 / 3.50	4.10 / 4.10
EER/COP	Cooling/Heating		3.57 / 3.20	3.05 / 3.41
Inrush current		A	5	5
Max. current			15	15
Sound power level*1	Indoor*3	Cooling/Heating	59 / 59	60 / 60
	Outdoor	Cooling/Heating	70 / 70	70 / 70
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	46 / 42 / 38 / 31
		Heating (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	46 / 42 / 38 / 31
	Outdoor	Cooling/Heating	48 / 50	48 / 50
Air flow	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	13 / 11 / 9 / 7	14 / 12 / 10 / 8
		Heating (P-Hi/Hi/Me/Lo)	13 / 11 / 9 / 7	14 / 12 / 10 / 8
	Outdoor	Cooling/Heating	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 248 x 570 x 570 Panel: 10 x 620 x 620	
	Outdoor		1300 x 970 x 370	
Net weight	Indoor		16.5(Unit:14 Standard Panel:2.5)	
	Outdoor		105	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.100	
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 43*2	
	Heating	°CWB	-20 to 20	
Panel			TC-PSA-5AW-E, TC-PSAE-5AW-E(Honeycomb) / TC-PSAG-5AW-E, TC-PSAGE-5AW-E(Grid)	
Air filter, Q'ty			Pocket plastic net x 1(Washable)	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-TC-5AW-E3	

The values are for simultaneous Multi operation.

R32		Micro Inverter		
Set model name		FDTC100VNAWPVH	FDTC125VNAWPVH	FDTC140VNAWTVH
		Twin		Triple
Indoor unit		FDTC50VH x 2	FDTC60VH x 2	FDTC50VH x 3
Outdoor unit		FDC100VNA-W	FDC125VNA-W	FDC140VNA-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	kW	3.15 / 3.05	4.90 / 4.30
EER/COP	Cooling/Heating		3.17 / 3.67	2.55 / 3.26
Inrush current		A	5	5
Max. current			24	24
Sound power level*1	Indoor*3	Cooling/Heating	59 / 59	60 / 60
	Outdoor	Cooling/Heating	69 / 70	71 / 71
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	46 / 42 / 38 / 31
		Heating (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	46 / 42 / 38 / 31
	Outdoor	Cooling/Heating	54 / 55	54 / 56
Air flow	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	13 / 11 / 9 / 7	14 / 12 / 10 / 8
		Heating (P-Hi/Hi/Me/Lo)	13 / 11 / 9 / 7	14 / 12 / 10 / 8
	Outdoor	Cooling/Heating	75 / 73	75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 248 x 570 x 570 Panel: 10 x 620 x 620	
	Outdoor		845 x 970 x 370	
Net weight	Indoor		16.5(Unit:14 Standard Panel:2.5)	
	Outdoor		77	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.50	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2	
	Heating	°CWB	-20 to 20	
Panel			TC-PSA-5AW-E, TC-PSAE-5AW-E(Honeycomb) / TC-PSAG-5AW-E, TC-PSAGE-5AW-E(Grid)	
Air filter, Q'ty			Pocket plastic net x 1(Washable)	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3, Wireless:RCN-TC-5AW-E3	

SPECIFICATIONS -FDTC-

The values are for simultaneous Multi operation.

R32			Micro Inverter				
Set model name			FDTC100VSAWPVH	FDTC125VSAWPVH	FDTC140VSAWTVH	FDTC200VSAWDVH	FDTC250VSAWDVH
			Twin		Triple	Double Twin	
Indoor unit			FDTC50VH x 2	FDTC60VH x 2	FDTC50VH x 3	FDTC50VH x 4	FDTC60VH x 4
Outdoor unit			FDC100VSA-W	FDC125VSA-W	FDC140VSA-W	FDC200VSA-W	FDC250VSA-W
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz				
Nominal cooling capacity (Min - Max)	kW		10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	20.0 (7.1 - 22.4)	25.0 (7.1 - 28.0)
Nominal heating capacity (Min - Max)	kW		11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	22.4 (6.6 - 25.0)	28.0 (5.2 - 31.5)
Power consumption	Cooling/Heating	kW	3.15 / 3.05	4.90 / 4.30	4.75 / 4.60	6.92 / 6.37	9.43 / 8.75
EER/COP	Cooling/Heating		3.17 / 3.67	2.55 / 3.26	2.86 / 3.37	2.89 / 3.52	2.65 / 3.20
Inrush current		A	5	5	5	5	5
Max. current			15	15	15	19	20
Sound power level*1	Indoor ³	Cooling/Heating	59 / 59	60 / 60	59 / 59	59 / 59	60 / 60
	Outdoor	Cooling/Heating	69 / 70	71 / 71	72 / 73	72 / 74	73 / 75
Sound pressure level*1	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	46 / 42 / 38 / 31	44 / 40 / 35 / 27	44 / 40 / 35 / 27	46 / 42 / 38 / 31
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	46 / 42 / 38 / 31	44 / 40 / 35 / 27	44 / 40 / 35 / 27	46 / 42 / 38 / 31
Air flow	Indoor ³	Cooling/Heating	54 / 55	54 / 56	56 / 58	58 / 59	58 / 62
	Outdoor	Cooling/Heating	13 / 11 / 9 / 7	14 / 12 / 10 / 8	13 / 11 / 9 / 7	13 / 11 / 9 / 7	14 / 12 / 10 / 8
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 248 x 570 x 570 Panel: 10 x 620 x 620				
	Outdoor		845 x 970 x 370		1505 x 970 x 370		
Net weight	Indoor		16.5(Unit:14 Standard Panel:2.5)				
	Outdoor		78		144		145
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			9.52(3/8") / 22.22(7/8")	12.7(1/2") / 22.22(7/8")
Refrigerant line (one way) length		m	Max.50			Max.70	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15			Max.50*4 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2				
	Heating	°CWB	-20 to 20				
Panel			TC-PSA-5AW-E, TC-PSAE-5AW-E(Honeycomb) / TC-PSAG-5AW-E, TC-PSAGE-5AW-E(Grid)				
Air filter, Q'ty			Pocket plastic net x 1(Washable)				
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3, Wireless:RCN-TC-5AW-E3				

The values are for simultaneous Multi operation.

R410A			Micro Inverter				
Set model name			FDTC100VNAPVH	FDTC125VNAPVH	FDTC140VNATVH		
			Twin		Triple		
Indoor unit			FDTC50VH x 2	FDTC60VH x 2	FDTC50VH x 3		
Outdoor unit			FDC100VNA	FDC125VNA	FDC140VNA		
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz				
Nominal cooling capacity (Min - Max)	kW		10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)		
Nominal heating capacity (Min - Max)	kW		11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)		
Power consumption	Cooling/Heating	kW	3.30 / 3.15	4.90 / 4.50	4.75 / 4.60		
EER/COP	Cooling/Heating		3.03 / 3.56	2.55 / 3.11	2.86 / 3.37		
Inrush current		A	5	5	5		
Max. current			25	25	25		
Sound power level*1	Indoor ³	Cooling/Heating	59 / 59	60 / 60	59 / 59		
	Outdoor	Cooling/Heating	70 / 70	71 / 71	73 / 73		
Sound pressure level*1	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	46 / 42 / 38 / 31	44 / 40 / 35 / 27		
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	46 / 42 / 38 / 31	44 / 40 / 35 / 27		
Air flow	Indoor ³	Cooling/Heating	54 / 56	55 / 57	57 / 59		
	Outdoor	Cooling/Heating	13 / 11 / 9 / 7	14 / 12 / 10 / 8	13 / 11 / 9 / 7		
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 248 x 570 x 570 Panel: 10 x 620 x 620				
	Outdoor		845 x 970 x 370				
Net weight	Indoor		16.5(Unit:14 Standard Panel:2.5)				
	Outdoor		80				
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")				
Refrigerant line (one way) length		m	Max.50				
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15				
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2				
	Heating	°CWB	-20 to 20				
Panel			TC-PSA-5AW-E, TC-PSAE-5AW-E(Honeycomb) / TC-PSAG-5AW-E, TC-PSAGE-5AW-E(Grid)				
Air filter, Q'ty			Pocket plastic net x 1(Washable)				
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3, Wireless:RCN-TC-5AW-E3				

NOTES:

- The data are measured under the following conditions(R32 : ISO-T1, -H1 / R410A : ISO-T1).
Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.
*3 : The values are for one indoor unit operation. (Multi system only)
*4 : In case of following conditions:Max.50m(Outdoor unit is higher & Outdoor temperature ≤ 43°C), Max.30m(Outdoor unit is higher & Outdoor temperature > 43°C)


The values are for simultaneous Multi operation.

R410A			Micro Inverter				
Set model name			FDTC100VSAPVH	FDTC125VSAPVH	FDTC140VSATVH	FDTC200VSADVH	FDTC250VSADVH
			Twin		Triple	Double Twin	
Indoor unit			FDTC50VH x 2	FDTC60VH x 2	FDTC50VH x 3	FDTC50VH x 4	FDTC60VH x 4
Outdoor unit			FDC100VSA	FDC125VSA	FDC140VSA	FDC200VSA	FDC250VSA
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz				
Nominal cooling capacity (Min - Max)		kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	19.0 (5.2 - 22.4)	24.0 (6.9 - 28.0)
Nominal heating capacity (Min - Max)		kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	22.4 (3.3 - 25.0)	27.0 (5.5 - 31.5)
Power consumption	Cooling/Heating	kW	3.30 / 3.15	4.90 / 4.50	4.75 / 4.60	6.95 / 6.79	10.65 / 8.20
EER/COP	Cooling/Heating		3.03 / 3.56	2.55 / 3.11	2.86 / 3.37	2.73 / 3.30	2.25 / 3.29
Inrush current		A	5	5	5	5	5
Max. current			15	15	15	20	21
Sound power level* ¹	Indoor ³	Cooling/Heating	59 / 59	60 / 60	59 / 59	59 / 59	60 / 60
	Outdoor	Cooling/Heating	70 / 70	71 / 71	73 / 73	72 / 74	75 / 75
Sound pressure level* ¹	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	46 / 42 / 38 / 31	44 / 40 / 35 / 27	44 / 40 / 35 / 27	46 / 42 / 38 / 31
		Heating (P-Hi/Hi/Me/Lo)	44 / 40 / 35 / 27	46 / 42 / 38 / 31	44 / 40 / 35 / 27	44 / 40 / 35 / 27	46 / 42 / 38 / 31
	Outdoor	Cooling/Heating	54 / 56	55 / 57	57 / 59	58 / 59	61 / 62
Air flow	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	13 / 11 / 9 / 7	14 / 12 / 10 / 8	13 / 11 / 9 / 7	13 / 11 / 9 / 7	14 / 12 / 10 / 8
		Heating (P-Hi/Hi/Me/Lo)	13 / 11 / 9 / 7	14 / 12 / 10 / 8	13 / 11 / 9 / 7	13 / 11 / 9 / 7	14 / 12 / 10 / 8
	Outdoor	Cooling/Heating	75 / 73	75 / 73	75 / 73	135 / 135	143 / 151
Exterior dimensions	Indoor	HeightxWidthxDepth	Unit: 248 x 570 x 570 Panel: 10 x 620 x 620				
	Outdoor		845 x 970 x 370		1300 x 970 x 370		1505 x 970 x 370
Net weight	Indoor		16.5(Unit:14 Standard Panel:2.5)				
	Outdoor		82		115		143
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			9.52(3/8") / 22.22(7/8")	12.7(1/2") / 22.22(7/8")
Refrigerant line (one way) length		m	Max.50			Max.70	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15			Max.30 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50* ²				
	Heating	°CWB	-20 to 20			-15 to 20	
Panel			TC-PSA-5AW-E, TC-PSAE-5AW-E(Honeycomb) / TC-PSAG-5AW-E, TC-PSAGE-5AW-E(Grid)				
Air filter, Q'ty			Pocket plastic net x 1(Washable)				
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-TC-5AW-E3				


FDU

Indoor Unit


Duct Connected -High Static pressure-

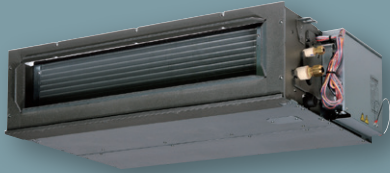

FDU 71/100/125/140

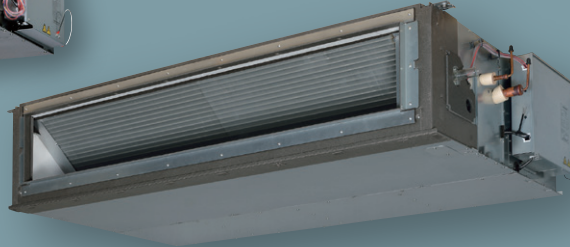

FDU 200/250/280

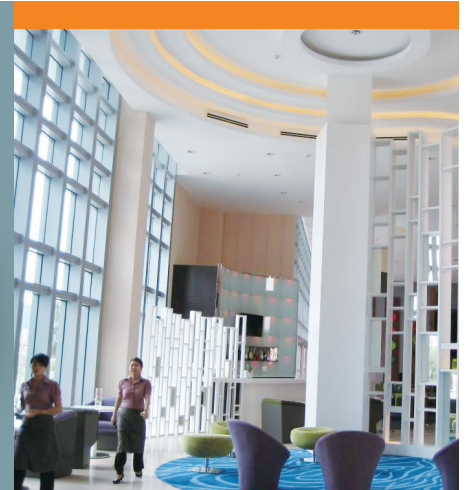

- Energy Saving
- Automatic Operation
- Silent Operation
- Hi Power
- Weekly/Sleep/Peak-Cut Timer
- Self-Diagnostics




Remote control (Option)

Wired				Wireless	
RC-EX3D	RC-EXZ3D	RC-E5	RC-ES1	RCH-E3	RCN-KIT4-E2

*Not all functions available with all remote control options.

External Static Pressure (E.S.P.) Control

The External Static Pressure (E.S.P.) can be manually set on the wired remote controller. Indoor unit will control the fan speed to keep rated air flow volume at each fan speed setting. You can set required E.S.P. by wired remote controller, calculated with the set air flow rate and the pressure loss of the duct.

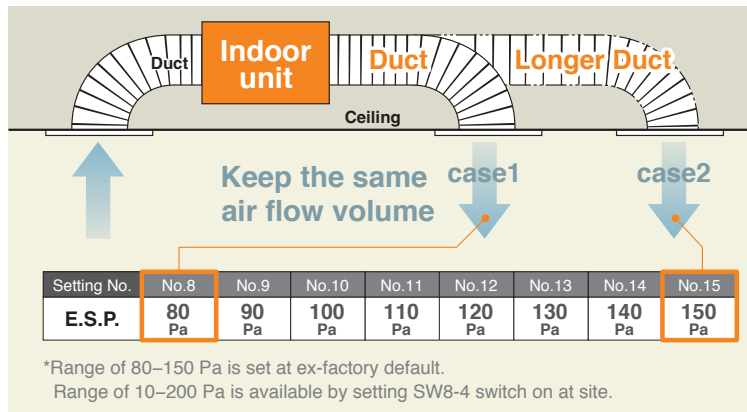

Range of external static pressure

10–200Pa

RC-E5

E.S.P. button

External Static Pressure (E.S.P.) can be set by E.S.P. button.




Motion Sensor (Option)

Motion sensor is equipped in the ceiling plane or wall plane and detects the presence/absence and activity of humans in a room to improve the comfort and energy saving performance of the unit.




LB-KIT2




High Efficiency

Energy efficiency is improved by use of DC fan motor & high efficient heat exchanger.

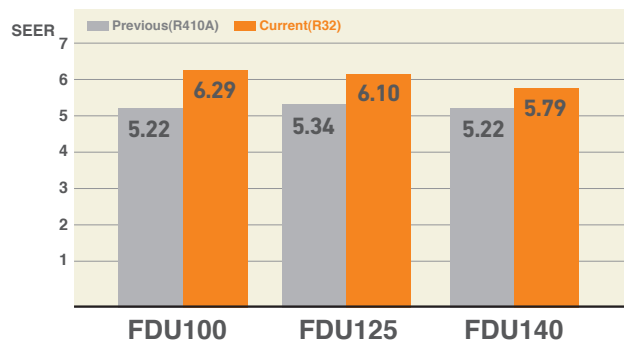

Zoning system (Max 8 zones)

Effectively control temperatures of multiple rooms with one indoor duct unit.

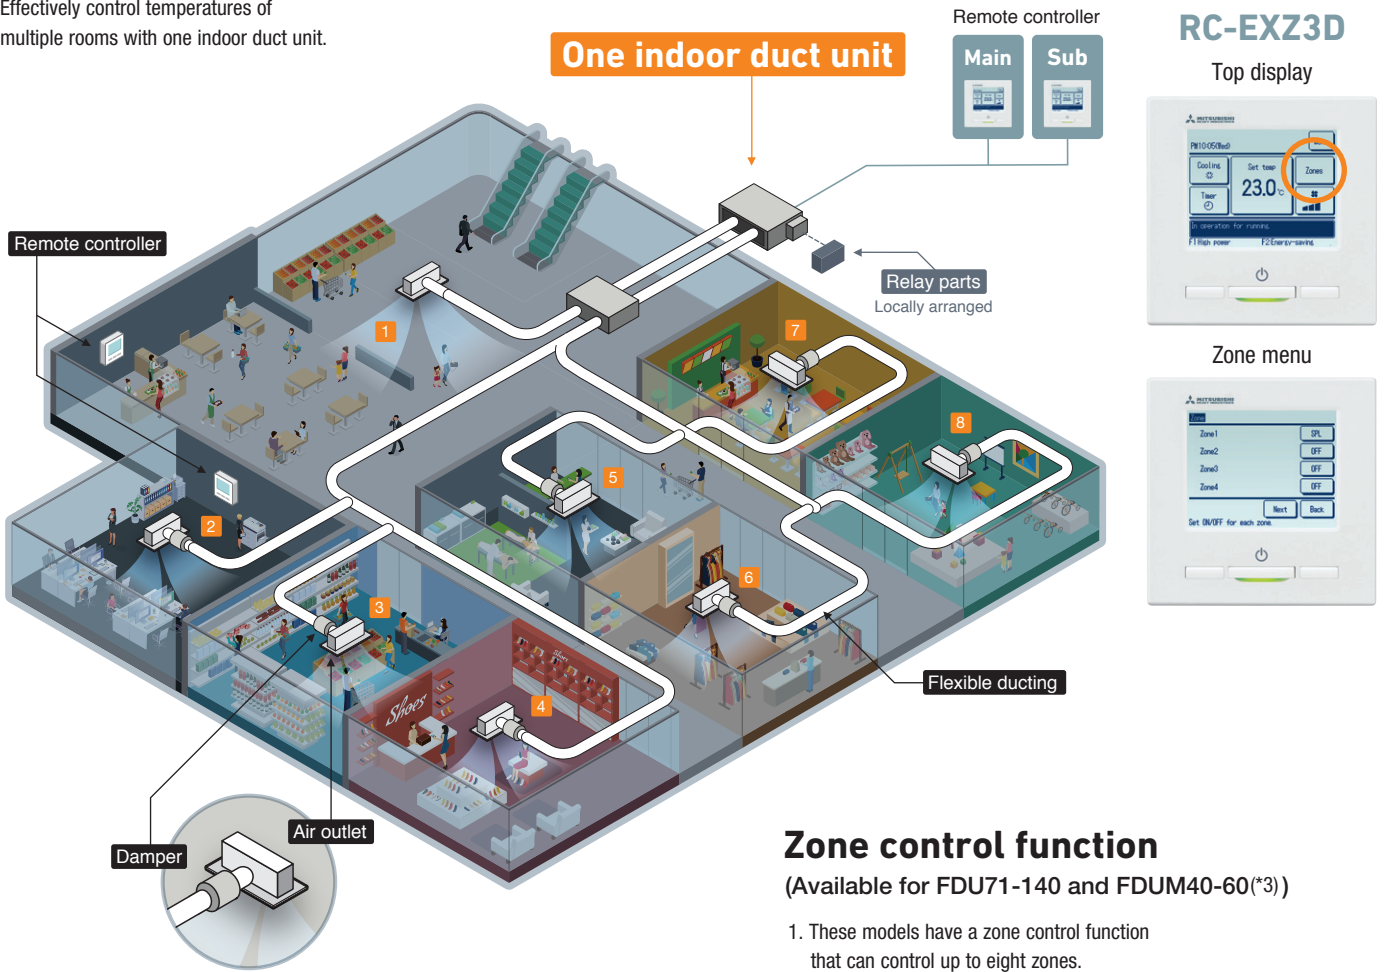

Zone control function


(Available for FDU71-140 and FDUM40-60(*3))

1. These models have a zone control function that can control up to eight zones.
2. The damper of each zone can be opened or closed with the exclusive remote control (RC-EXZ3D).
3. Timer function to open/close the damper is also available.
4. The duct system should be designed so that air flow volume of common zone(*1) or spill zone(*2) is 50% of total air flow volume.

*1: Common zone; A zone in which a damper is not installed.
 *2: Spill zone; A zone in which a damper open automatically.
 *3: For the FDUM series, only 4 Zone (max) are available.


Example of 6 zones

- Notes :
1. Cannot control more than 8 zones.
 2. Procure relevant parts such as relay parts, dampers, ducts, and wirings locally.
 3. The E.S.P. to Zone 2-6 should be the same as that for Zone 1

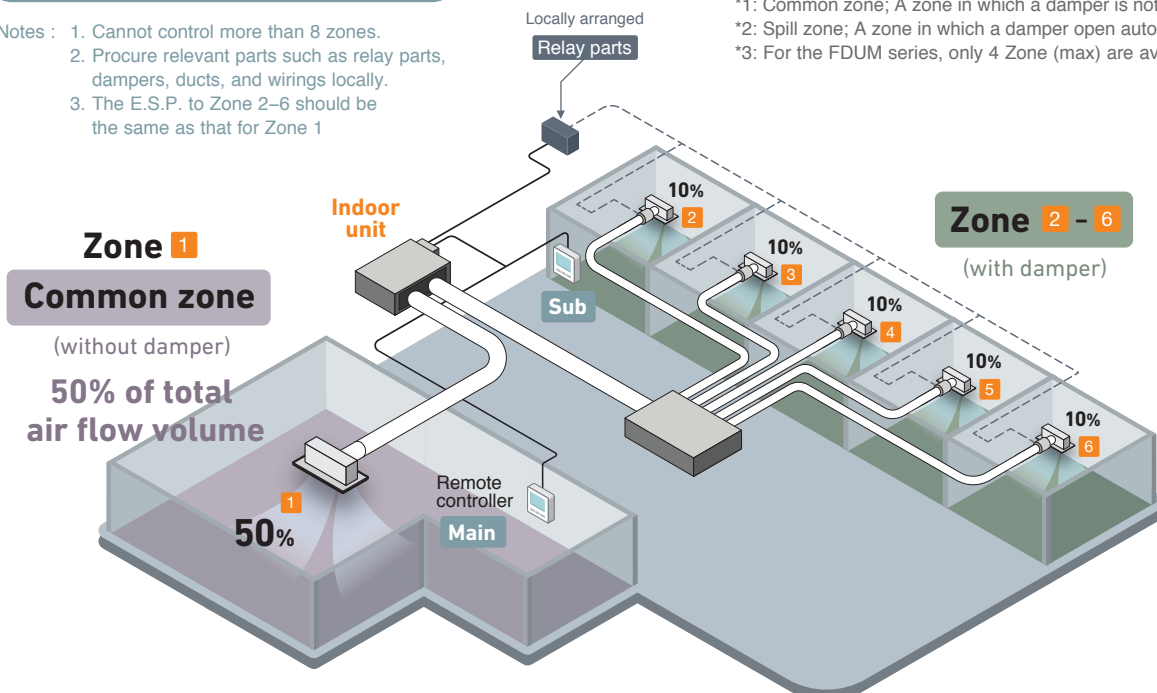


Improvement of the Serviceability

Fan unit (impeller and motor) can be pulled out from the right side of the unit. Maintenance can be carried out from the right side or the bottom side of the unit.

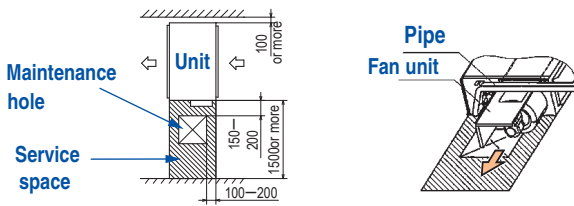


Transparent Inspection Window

Dirt condition of the bottom of a drain pan can be checked through this transparent inspection window without removing drain pan.

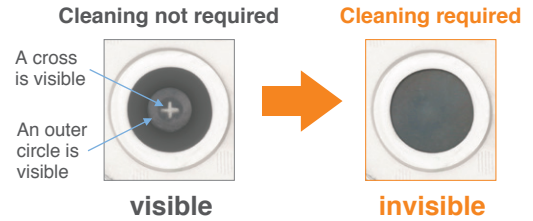













Enhanced Installation Workability

600mm Drain Pump is mounted in FDU71/100/125/140. The indoor unit is completely hidden in the ceiling, so this is suitable for spaces with classy interior decoration.



OUTDOOR UNIT



		Hyper Inverter	
FDC		71VNX-W	100-140VN(S)X-W
		-	100-140VN(S)X
model			
Chargeless		30m	
Height x Width x Depth (mm)		750 x 880(+88) x 340	1300 x 970 x 370

		Micro Inverter			Standard Inverter		
FDC		100-140VN(S)A-W	-	200-250-280VSA-W	71VNP-W	90-100VNP-W	125VNP-W
		100-140VN(S)A	200VSA	250VSA	-	-	-
model							
Chargeless		30m			15m		
Height x Width x Depth (mm)		845 x 970 x 370	1300 x 970 x 370	1505 x 970 x 370	640 x 800(+71) x 290	750 x 880(+88) x 340	845 x 970 x 370

Round Duct Adapter (Available for FDU71-140 and FDUM40-140)


AIRZONE Company: AIRZONE
URL: <http://www.airzone.es>

All-in-one solution: the whole zoning system in a plug&play device perfectly adapted to the indoor DX unit

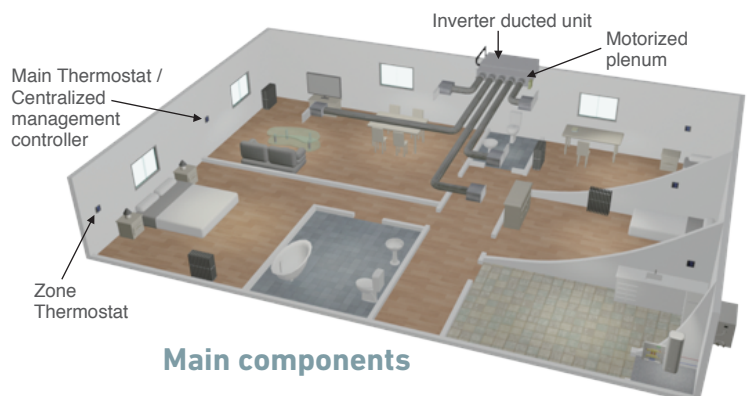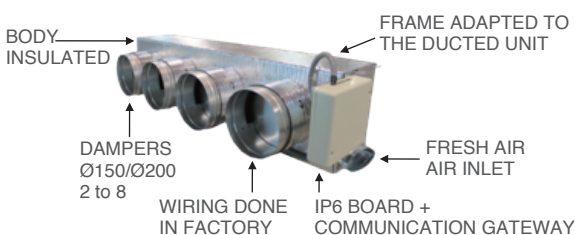


Main components

Model FDU71VH

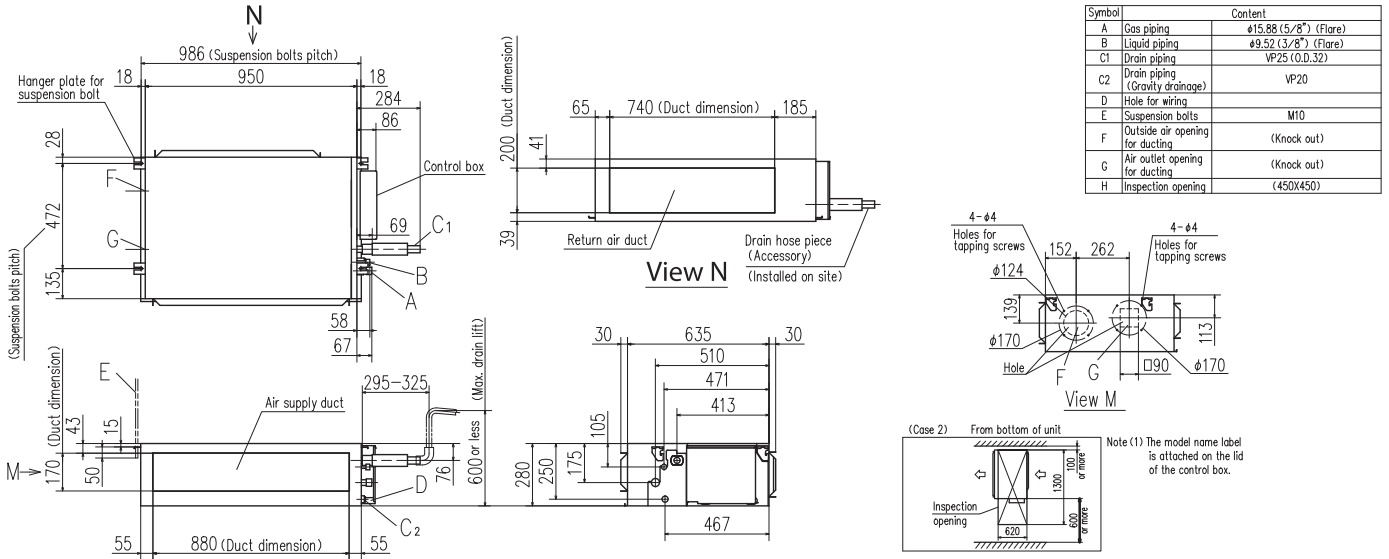


DIMENSIONS (Unit:mm) - FDU -

Models FDU100VH,125VH,140VH

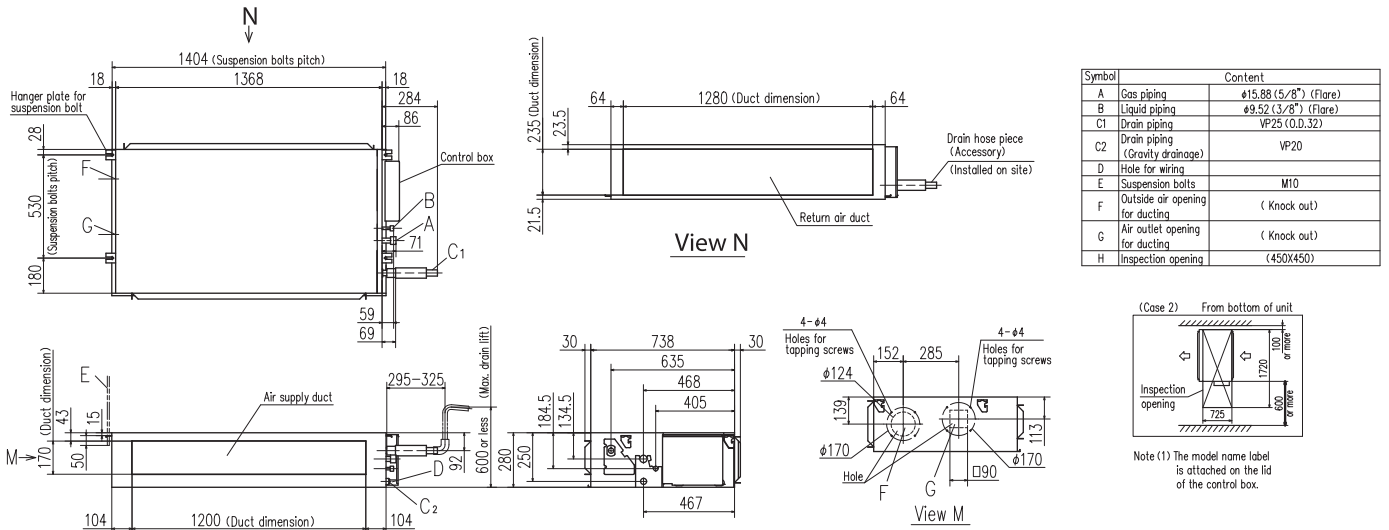

Models FDU200VH, 250VH, 280VH

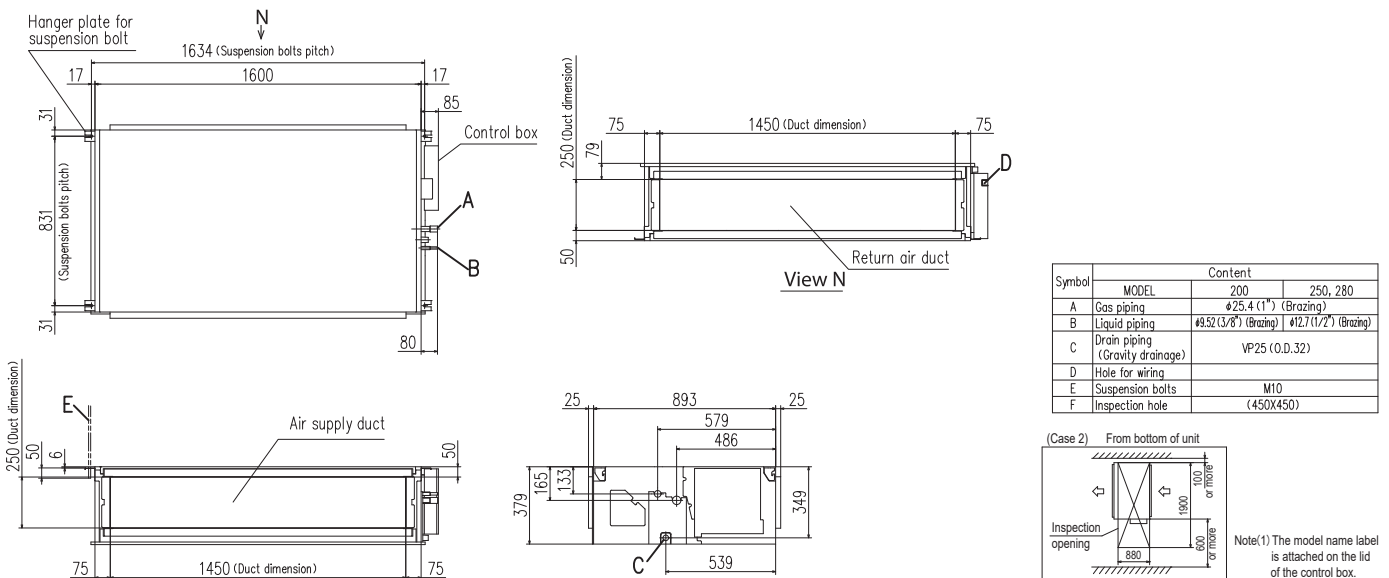

SPECIFICATIONS -FDU-

R32			Hyper Inverter			
Set model name			FDU71VNXWVH	FDU100VNXWVH	FDU125VNXWVH	FDU140VNXWVH
Indoor unit			FDU71VH	FDU100VH	FDU125VH	FDU140VH
Outdoor unit			FDC71VNX-W	FDC100VNX-W	FDC125VNX-W	FDC140VNX-W
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)			kW		7.1 (3.2 - 8.0)	10.0 (3.5 - 11.2)
Nominal heating capacity (Min - Max)			kW		8.0 (3.6 - 9.0)	11.2 (2.7 - 12.5)
Power consumption			kW		1.77 / 1.78	2.59 / 2.63
EER/COP			Cooling/Heating		4.01 / 4.49	3.86 / 4.26
Inrush current			A		5	5
Max. current			A		20	26
Sound power level*1			dB(A)		65 / 65	65 / 65
Sound pressure level*1			dB(A)		66 / 66	67 / 67
Air flow			m³/min		67 / 67	68 / 70
External static pressure*2			Pa		68 / 70	69 / 71
Exterior dimensions			mm		69 / 71	70 / 70
Net weight			kg		70 / 70	71 / 71
Ref.piping size			ømm		71 / 71	71 / 71
Refrigerant line (one way) length			m		71 / 71	71 / 71
Vertical height differences			m		71 / 71	71 / 71
Outdoor operating temperature range			°CDB		71 / 71	71 / 71
Air filter					71 / 71	71 / 71
Remote control (option)					71 / 71	71 / 71

R32			Hyper Inverter			
Set model name			FDU100VSXWVH	FDU125VSXWVH	FDU140VSXWVH	
Indoor unit			FDU100VH	FDU125VH	FDU140VH	
Outdoor unit			FDC100VSX-W	FDC125VSX-W	FDC140VSX-W	
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)			kW		10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)
Nominal heating capacity (Min - Max)			kW		11.2 (2.7 - 16.0)	14.0 (2.7 - 18.0)
Power consumption			kW		2.59 / 2.63	3.49 / 3.61
EER/COP			Cooling/Heating		3.86 / 4.26	3.58 / 3.88
Inrush current			A		5	5
Max. current			A		15	16
Sound power level*1			dB(A)		65 / 65	67 / 67
Sound pressure level*1			dB(A)		67 / 67	68 / 70
Air flow			m³/min		68 / 70	69 / 71
External static pressure*2			Pa		69 / 71	70 / 70
Exterior dimensions			mm		70 / 70	71 / 71
Net weight			kg		71 / 71	71 / 71
Ref.piping size			ømm		71 / 71	71 / 71
Refrigerant line (one way) length			m		71 / 71	71 / 71
Vertical height differences			m		71 / 71	71 / 71
Outdoor operating temperature range			°CDB		71 / 71	71 / 71
Air filter					71 / 71	71 / 71
Remote control (option)					71 / 71	71 / 71

NOTES:

The data are measured under the following conditions(R32:ISO-T1, -H1 / R410A:ISO-T1).
Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
*2 : External static pressure is changeable to be set by the remote control. MAX external static pressure is "High static pressure" setting. The values of sound pressure level become 5dB(A) higher at external static pressure of 200Pa.
*3 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

R410A			Hyper Inverter		
Set model name			FDU100VNXVH	FDU125VNXVH	FDU140VNXVH
Indoor unit			FDU100VH	FDU125VH	FDU140VH
Outdoor unit			FDC100VNX	FDC125VNX	FDC140VNX
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)			10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)			11.2 (4.0 - 12.5)	14.0 (4.0 - 17.0)	16.0 (4.0 - 18.0)
Power consumption			2.68 / 3.02	3.49 / 3.77	4.28 / 4.42
EER/COP			3.73 / 3.71	3.58 / 3.71	3.27 / 3.62
Inrush current			5	5	5
Max. current			25	29	30
Sound power level*1	Indoor	Cooling/Heating	65 / 65	67 / 67	70 / 70
	Outdoor	Cooling/Heating	70 / 70	70 / 70	72 / 72
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
		Heating (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
	Outdoor	Cooling/Heating	48 / 50	48 / 50	49 / 52
		Cooling/Heating	48 / 50	48 / 50	49 / 52
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
		Heating (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
	Outdoor	Cooling/Heating	100 / 100	100 / 100	100 / 100
		Cooling/Heating	100 / 100	100 / 100	100 / 100
External static pressure*2			Standard:60 Max:200		
Exterior dimensions	Indoor	HeightxWidthxDepth	280 x 1370 x 740		
	Outdoor		1300 x 970 x 370		
Net weight	Indoor		54		
	Outdoor		105		
Ref.piping size			9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length			Max.100		
Vertical height differences			Max.30 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 43*3		
	Heating		°CWB -20 to 20		
Air filter			Procure locally		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2		

R410A			Hyper Inverter		
Set model name			FDU100VSXVH	FDU125VSXVH	FDU140VSXVH
Indoor unit			FDU100VH	FDU125VH	FDU140VH
Outdoor unit			FDC100VSX	FDC125VSX	FDC140VSX
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)			10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)			11.2 (4.0 - 16.0)	14.0 (4.0 - 18.0)	16.0 (4.0 - 20.0)
Power consumption			2.68 / 3.02	3.49 / 3.77	4.28 / 4.42
EER/COP			3.73 / 3.71	3.58 / 3.71	3.27 / 3.62
Inrush current			5	5	5
Max. current			16	18	19
Sound power level*1	Indoor	Cooling/Heating	65 / 65	67 / 67	70 / 70
	Outdoor	Cooling/Heating	70 / 70	70 / 70	72 / 72
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
		Heating (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
	Outdoor	Cooling/Heating	48 / 50	48 / 50	49 / 52
		Cooling/Heating	48 / 50	48 / 50	49 / 52
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
		Heating (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
	Outdoor	Cooling/Heating	100 / 100	100 / 100	100 / 100
		Cooling/Heating	100 / 100	100 / 100	100 / 100
External static pressure*2			Standard:60 Max:200		
Exterior dimensions	Indoor	HeightxWidthxDepth	280 x 1370 x 740		
	Outdoor		1300 x 970 x 370		
Net weight	Indoor		54		
	Outdoor		105		
Ref.piping size			9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length			Max.100		
Vertical height differences			Max.30 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 43*3		
	Heating		°CWB -20 to 20		
Air filter			Procure locally		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2		

SPECIFICATIONS -FDU-

R32		Micro Inverter		
Set model name		FDU100VNAWVH	FDU125VNAWVH	FDU140VNAWVH
Indoor unit		FDU100VH	FDU125VH	FDU140VH
Outdoor unit		FDC100VNA-W	FDC125VNA-W	FDC140VNA-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	2.99 / 2.66	4.36 / 3.69	5.13 / 4.21
EER/COP	Cooling/Heating	3.35 / 4.21	2.87 / 3.79	2.65 / 3.68
Inrush current		5	5	5
Max. current		26	26	27
Sound power level*1	Indoor	Cooling/Heating	65 / 65	67 / 67
	Outdoor	Cooling/Heating	69 / 70	71 / 71
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29
		Heating (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29
	Outdoor	Cooling/Heating	54 / 55	54 / 56
				56 / 58
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20
		Heating (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20
	Outdoor	Cooling/Heating	75 / 73	75 / 73
External static pressure*2	Pa	Standard:60 Max:200		
Exterior dimensions	Indoor	HeightxWidthxDepth	280 x 1370 x 740	
	Outdoor		845 x 970 x 370	
Net weight	Indoor		54	
	Outdoor		77	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.50	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*3	
	Heating	°CWB	-20 to 20	
Air filter			Procure locally	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2	

R32		Micro Inverter		
Set model name		FDU100VSAWVH	FDU125VSAWVH	FDU140VSAWVH
Indoor unit		FDU100VH	FDU125VH	FDU140VH
Outdoor unit		FDC100VSA-W	FDC125VSA-W	FDC140VSA-W
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	2.99 / 2.66	4.36 / 3.69	5.13 / 4.21
EER/COP	Cooling/Heating	3.35 / 4.21	2.87 / 3.79	2.65 / 3.68
Inrush current		5	5	5
Max. current		17	17	18
Sound power level*1	Indoor	Cooling/Heating	65 / 65	67 / 67
	Outdoor	Cooling/Heating	69 / 70	71 / 71
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29
		Heating (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29
	Outdoor	Cooling/Heating	54 / 55	54 / 56
				56 / 58
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20
		Heating (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20
	Outdoor	Cooling/Heating	75 / 73	75 / 73
External static pressure*2	Pa	Standard:60 Max:200		
Exterior dimensions	Indoor	HeightxWidthxDepth	280 x 1370 x 740	
	Outdoor		845 x 970 x 370	
Net weight	Indoor		54	
	Outdoor		78	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.50	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*3	
	Heating	°CWB	-20 to 20	
Air filter			Procure locally	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2	

NOTES:

<p>The data are measured under the following conditions(R32 : ISO-T1, -H1 / , R410A : ISO-T1). Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. *1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions. *2 : External static pressure is changeable to be set by the remote control. MAX external static pressure is "High static pressure" setting. The values of sound pressure level become 5dB(A) higher at external static pressure of 200Pa. *3 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down. *4 : In case of following conditions:Max.50m(Outdoor unit is higher & Outdoor temperature ≤ 43°C), Max.30m(Outdoor unit is higher & Outdoor temperature > 43°C)</p>
--

R32			Micro Inverter		
Set model name			FDU200VSAWVH	FDU250VSAWVH	FDU280VSAWVH
Indoor unit			FDU200VH	FDU250VH	FDU280VH
Outdoor unit			FDC200VSA-W	FDC250VSA-W	FDC280VSA-W
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)			20.0 (7.2 - 22.4)	25.0 (7.2 - 28.0)	27.0 (6.9 - 31.5)
Nominal heating capacity (Min - Max)			22.4 (6.5 - 25.0)	28.0 (6.7 - 31.5)	30.0 (6.9 - 33.5)
Power consumption		Cooling/Heating	6.15 / 5.67	8.25 / 7.55	9.15 / 9.12
EER/COP		Cooling/Heating	3.25 / 3.95	3.03 / 3.75	2.95 / 3.29
Inrush current		A	5	5	5
Max. current			23	25	25
Sound power level*1	Indoor	Cooling/Heating	78 / 78	78 / 78	78 / 78
	Outdoor	Cooling/Heating	72 / 74	73 / 75	75 / 77
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	52 / 50 / 47 / 45	52 / 50 / 47 / 45	52 / 50 / 47 / 45
		Heating (P-Hi/Hi/Me/Lo)	52 / 50 / 47 / 44	52 / 50 / 47 / 44	52 / 50 / 47 / 44
	Outdoor	Cooling/Heating	58 / 59	58 / 62	61 / 63
		Cooling (P-Hi/Hi/Me/Lo)	80 / 72 / 64 / 56	80 / 72 / 64 / 56	80 / 72 / 64 / 56
Air flow	Indoor	Heating (P-Hi/Hi/Me/Lo)	80 / 72 / 64 / 56	80 / 72 / 64 / 56	80 / 72 / 64 / 56
		Cooling/Heating	148 / 134	148 / 153	136 / 140
	Outdoor	Cooling/Heating			
External static pressure*2		Pa	Standard:72 Max:200		
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	379 x 1600 x 893	
	Outdoor			1505 x 970 x 370	
Net weight	Indoor		kg	88	
	Outdoor			144	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 22.22(7/8")		
Refrigerant line (one way) length		m	Max.70		Max.60
Vertical height differences		Outdoor is higher/lower	Max.50*4 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*3		
	Heating	°CWB	-20 to 20		
Air filter			Procure locally		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2		

R410A			Micro Inverter		
Set model name			FDU100VNAVH	FDU125VNAVH	FDU140VNAVH
Indoor unit			FDU100VH	FDU125VH	FDU140VH
Outdoor unit			FDC100VNA	FDC125VNA	FDC140VNA
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)			10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)			11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption		Cooling/Heating	2.84 / 2.78	4.36 / 3.69	4.93 / 4.21
EER/COP		Cooling/Heating	3.52 / 4.03	2.87 / 3.79	2.76 / 3.68
Inrush current		A	5	5	5
Max. current			26	26	27
Sound power level*1	Indoor	Cooling/Heating	65 / 65	67 / 67	70 / 70
	Outdoor	Cooling/Heating	70 / 70	71 / 71	73 / 73
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
		Heating (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
	Outdoor	Cooling/Heating	54 / 56	55 / 57	57 / 59
		Cooling (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
Air flow	Indoor	Heating (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
		Cooling/Heating	75 / 73	75 / 73	75 / 73
	Outdoor	Cooling/Heating			
External static pressure*2		Pa	Standard:60 Max:200		
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	280 x 1370 x 740	
	Outdoor			845 x 970 x 370	
Net weight	Indoor		kg	54	
	Outdoor			80	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max.50		
Vertical height differences		Outdoor is higher/lower	Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*3		
	Heating	°CWB	-20 to 20		
Air filter			Procure locally		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2		

SPECIFICATIONS -FDU-

R410A		Micro Inverter		
Set model name		FDU100VSAVH	FDU125VSAVH	FDU140VSAVH
Indoor unit		FDU100VH	FDU125VH	FDU140VH
Outdoor unit		FDC100VSA	FDC125VSA	FDC140VSA
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating kW	2.84 / 2.78	4.36 / 3.69	4.93 / 4.21
EER/COP	Cooling/Heating	3.52 / 4.03	2.87 / 3.79	2.76 / 3.68
Inrush current		5	5	5
Max. current		17	17	18
Sound power level*1	Indoor	Cooling/Heating	65 / 65	67 / 67
	Outdoor	Cooling/Heating	70 / 70	71 / 71
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29
		Heating (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29
	Outdoor	Cooling/Heating	54 / 56	55 / 57
				57 / 59
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20
		Heating (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20
	Outdoor	Cooling/Heating	75 / 73	75 / 73
External static pressure*2	Pa	Standard:60 Max:200		
Exterior dimensions	Indoor	HeightxWidthxDepth	280 x 1370 x 740	
	Outdoor		845 x 970 x 370	
Net weight	Indoor		54	
	Outdoor		82	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.50	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*3	
	Heating	°CWB	-20 to 20	
Air filter			Procure locally	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2	

R410A		Micro Inverter		
Set model name		FDU200VSAVH	FDU250VSAVH	
Indoor unit		FDU200VH	FDU250VH	
Outdoor unit		FDC200VSA	FDC250VSA	
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	19.0 (5.2 - 22.4)	24.0 (6.9 - 28.0)	
Nominal heating capacity (Min - Max)	kW	22.4 (3.3 - 25.0)	27.0 (5.5 - 31.5)	
Power consumption	Cooling/Heating kW	6.15 / 6.03	7.98 / 7.20	
EER/COP	Cooling/Heating	3.09 / 3.71	3.01 / 3.75	
Inrush current		5	5	
Max. current		25	27	
Sound power level*1	Indoor	Cooling/Heating	78 / 78	
	Outdoor	Cooling/Heating	72 / 74	
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	52 / 50 / 47 / 45	
		Heating (P-Hi/Hi/Me/Lo)	52 / 50 / 47 / 44	
	Outdoor	Cooling/Heating	58 / 59	
			59 / 62	
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	80 / 72 / 64 / 56	
		Heating (P-Hi/Hi/Me/Lo)	80 / 72 / 64 / 56	
	Outdoor	Cooling/Heating	135 / 135	
External static pressure*2	Pa	Standard:72 Max:200		
Exterior dimensions	Indoor	HeightxWidthxDepth	379 x 1600 x 893	
	Outdoor		1300 x 970 x 370	
Net weight	Indoor		88	
	Outdoor		143	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 22.22(7/8")	
Refrigerant line (one way) length		m	Max.70	
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*3	
	Heating	°CWB	-15 to 20	
Air filter			Procure locally	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2	

NOTES:

The data are measured under the following conditions(R32 : ISO-T1, -H1 / , R410A : ISO-T1).
Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
*2 : External static pressure is changeable to be set by the remote control. MAX external static pressure is "High static pressure" setting. The values of sound pressure level become 5dB(A) higher at external static pressure of 200Pa.
*3 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

R32			Standard Inverter			
Set model name			FDU71VNPVH	FDU90VNPVH	FDU100VNPVH	FDU125VNPVH
Indoor unit			FDU71VH	FDU100VH	FDU100VH	FDU125VH
Outdoor unit			FDC71VNP-W	FDC90VNP-W	FDC100VNP-W	FDC125VNP-W
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)			kW 7.1 (1.5 - 7.3)	9.0 (2.1 - 9.5)	10.0 (2.1 - 10.2)	12.1 (5.0 - 12.1)
Nominal heating capacity (Min - Max)			kW 7.1 (1.1 - 7.3)	9.0 (1.7 - 9.5)	10.0 (1.7 - 10.4)	12.1 (4.0 - 13.3)
Power consumption			Cooling/Heating kW 2.60 / 1.89	2.62 / 1.98	3.08 / 2.45	3.85 / 3.28
EER/COP			Cooling/Heating 2.73. / 3.76	3.44 / 4.55	3.25 / 4.08	3.14 / 3.69
Inrush current			A 5	5	5	5
Max. current			15.8	19	19	20
Sound power level*1	Indoor	Cooling/Heating	65 / 65	65 / 65	65 / 65	67 / 67
	Outdoor	Cooling/Heating	67 / 67	67 / 66	68 / 67	73 / 72
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	dB(A) 38 / 33 / 29 / 25	44 / 38 / 36 / 30	44 / 38 / 36 / 30	45 / 40 / 34 / 29
		Heating (P-Hi/Hi/Me/Lo)				
	Outdoor	Cooling/Heating	54 / 54	55 / 53	56 / 54	57 / 57
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	m³/min 24 / 19 / 15 / 10	36 / 28 / 25 / 19	36 / 28 / 25 / 19	39 / 32 / 26 / 20
		Heating (P-Hi/Hi/Me/Lo)				
	Outdoor	Cooling/Heating	42 / 42	59 / 55	63 / 55	75 / 79
External static pressure*2			Pa Standard:35 Max:200	Standard:60 Max:200		
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	280 x 950 x 635		
	Outdoor			640 x 800(+71) x 290	280 x 1370 x 740	
Net weight	Indoor		kg	34		
	Outdoor			45	54	
Ref.piping size	Liquid/Gas		ømm	6.35(1/4") / 12.7(1/2")		6.35(1/4") / 15.88(5/8")
				9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length			m Max.30	Max.30		
Vertical height differences			m Max.20 / Max.20	Max.20 / Max.20		
Outdoor operating temperature range	Cooling	°CDB	-15 to 46*3			
	Heating		°CWB -15 to 20			
Air filter			Procure locally			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2			

FDUM

Indoor Unit
Duct Connected
-Low/Middle Static pressure-




FDUM 40/50/60/71/100/125/140

Filter kit (Option)



UM-FL1EF : for 40, 50
 UM-FL2EF : for 60, 71
 UM-FL3EF : for 100, 125, 140
 external static pressure loss:5Pa

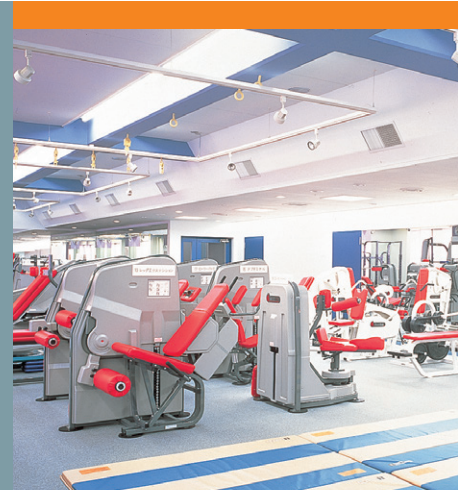

- Energy Saving
- Automatic Operation
- Silent Operation
- Hi Power
- Weekly/Sleep/Peak-Cut Timer
- Self-Diagnostics



Remote control (Option)

Wired				Wireless	
RC-EX3D RC-EXZ3D	RC-E5	New! RC-ES1	RCH-E3	RCN-KIT4-E2	

*Not all functions available with all remote control options.

Thin Design

The height of all FDUM models is only 280mm.


FDUM100/125/140		FDUM40/50/60/71	
70mm less		19mm less	
H 350mm	H 280mm	H 299mm	H 280mm

Motion Sensor (Option)

Motion sensor is equipped in the ceiling plane or wall plane and detects the presence/absence and activity of humans in a room to improve the comfort and energy saving performance of the unit.



LB-KIT2



Automatic External Static Pressure (E.S.P.) Control

Duct design was simplified.
 Using DC motor, the most optimum air flow volume can be achieved by this automatic control.
 Indoor unit will recognize external static pressure by itself automatically and keep rated air flow volume.

Keep the same air flow volume

Setting No.	No.1	No.2	No.3	No.4	No.5	No.6	No.7	No.8	No.9	No.10
E.S.P.	10 Pa	20 Pa	30 Pa	40 Pa	50 Pa	60 Pa	70 Pa	80 Pa	90 Pa	100 Pa

RC-E5

E.S.P. button

External Static Pressure (E.S.P.) can be set by E.S.P. button.



Zoning system

Effectively control temperatures of multiple rooms with one indoor duct unit. (Please refer to P47)

Improvement of the Serviceability


Fan unit (impeller and motor) can be pulled out from the right side of the unit. Maintenance can be carried out from the right side or the bottom side of the unit.

Transparent Inspection Window

Dirt condition of the bottom of a drain pan can be checked through this transparent inspection window without removing drain pan. (Please refer to P48)

Enhanced Installation Workability

600mm Drain Pump is mounted in all models. The indoor unit is completely hidden in the ceiling, so this is suitable for spaces with classy interior decoration.




OUTDOOR UNIT

		Hyper Inverter		
SRC · FDC		40ZSX-W1,50-60ZSX-W3	71VNX-W	100-140VN(S)X-W 100-140VN(S)X
model				
Chargeless		15m	30m	
Height x Width x Depth (mm)		640 x 800(+71) x 290	750 x 880(+88) x 340	1300 x 970 x 370

		Micro Inverter			Standard Inverter		
FDC		100-140VN(S)A-W 100-140VN(S)A	- 200VSA	200-250-280VSA-W 250VSA	71VNP-W	90-100VNP-W	125VNP-W
model							
Chargeless		30m			15m		
Height x Width x Depth (mm)		845 x 970 x 370	1300 x 970 x 370	1505 x 970 x 370	640 x 800(+71) x 290	750 x 880(+88) x 340	845 x 970 x 370

DIMENSIONS (Unit:mm) - FDUM -

Models FDUM40VH, 50VH

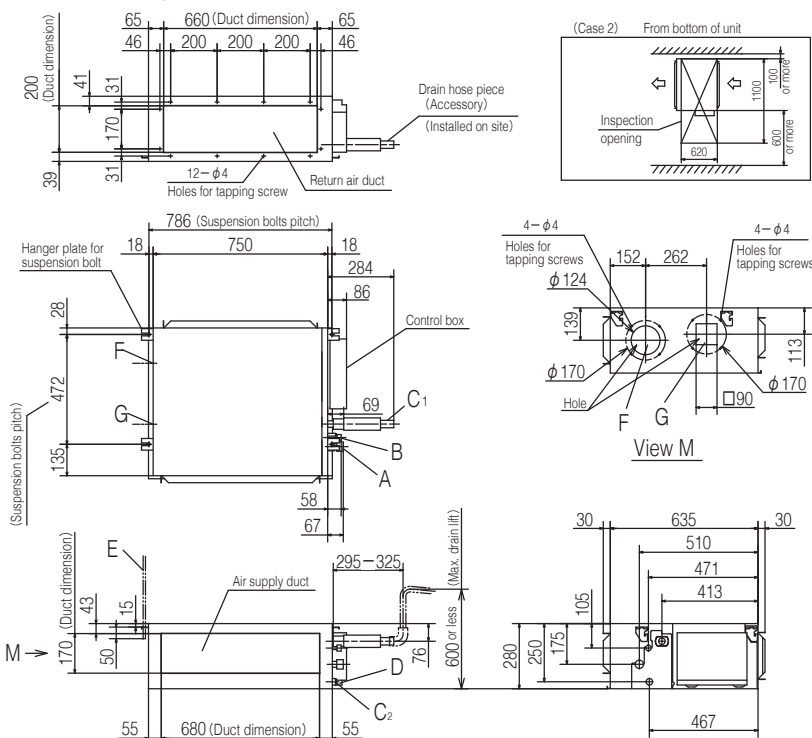


Symbol	Content
A	Gas piping ϕ 12.7 (1/2") (Flare)
B	Liquid piping ϕ 6.35 (1/4") (Flare)
C1	Drain piping VP25 (O.D.32)
C2	Drain piping (Gravity drainage) VP20
D	Hole for wiring
E	Suspension bolts (M10)
F	Outside air opening for ducting (ϕ 150) (Knock out)
G	Air outlet opening for ducting (ϕ 125) (Knock out)
H	Inspection opening (450x450)

Note(1) The model name label is attached on the lid of the control box.


Space for installation and service

Select either of two cases to keep space for installation and services.
(Case 1) From side of unit

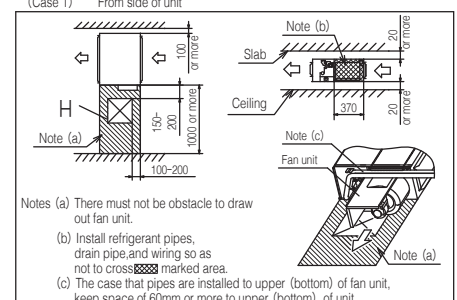

DIMENSIONS (Unit:mm) - FDUM -

Models FDUM60VH,71VH

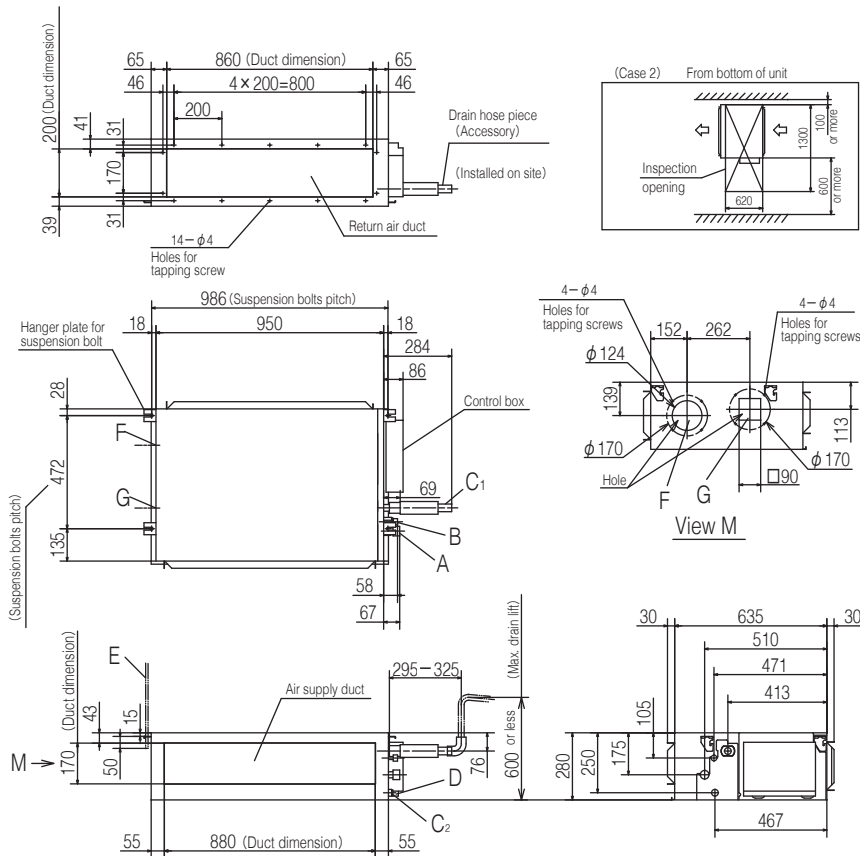


Symbol	Content	
	Model 60	71
A	Gas piping	φ 12.7 (1/2") (Flare) φ 15.88 (5/8") (Flare)
B	Liquid piping	φ 6.35 (1/4") (Flare) φ 9.52 (3/8") (Flare)
C1	Drain piping	VP25 (O.D.32)
C2	Drain piping (Gravity drainage)	VP20
D	Hole for wiring	
E	Suspension bolts	(M10)
F	Outside air opening for ducting	(φ 150) (Knock out)
G	Air outlet opening for ducting	(φ 125) (Knock out)
H	Inspection opening	(450×450)

Note(1) The model name label is attached on the lid of the control box.


Space for installation and service

Select either of two cases to keep space for installation and services.

(Case 1) From side of unit

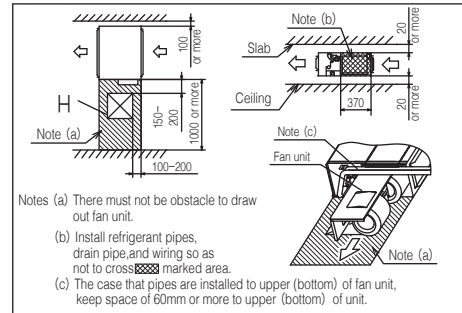

Models FDUM100VH,125VH,140VH

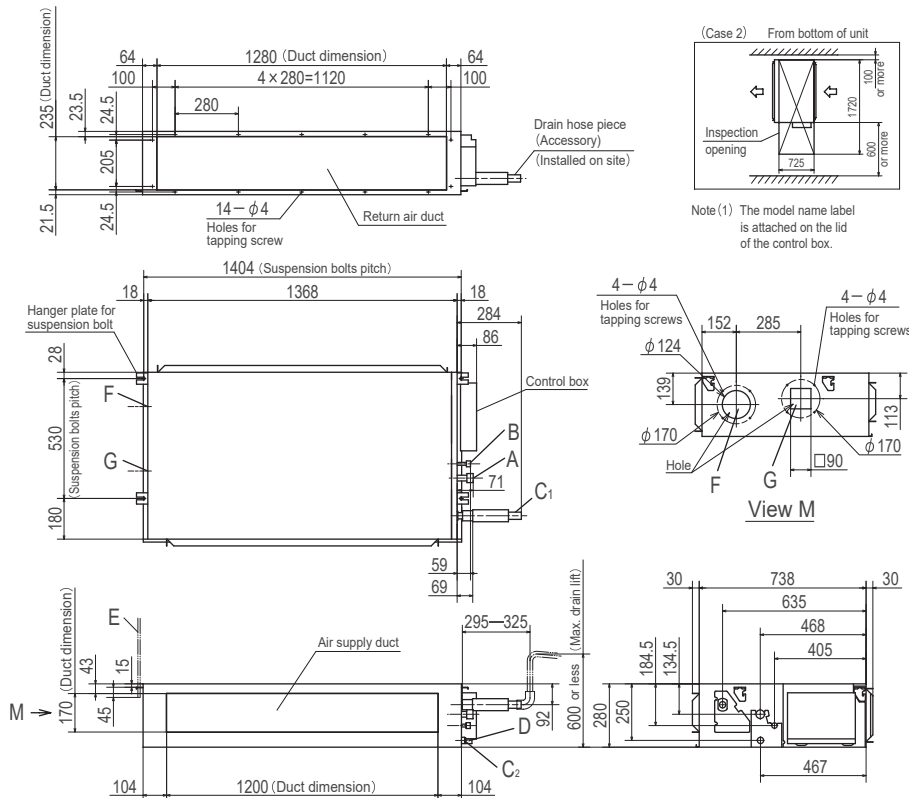


Note(1) The model name label is attached on the lid of the control box.



Symbol	Content	
A	Gas piping	φ 15.88 (5/8") (Flare)
B	Liquid piping	φ 9.52 (3/8") (Flare)
C1	Drain piping	VP25 (O.D.32)
C2	Drain piping (Gravity drainage)	VP20
D	Hole for wiring	
E	Suspension bolts	(M10)
F	Outside air opening for ducting	(φ 150) (Knock out)
G	Air outlet opening for ducting	(φ 125) (Knock out)
H	Inspection opening	(450×450)



Space for installation and service

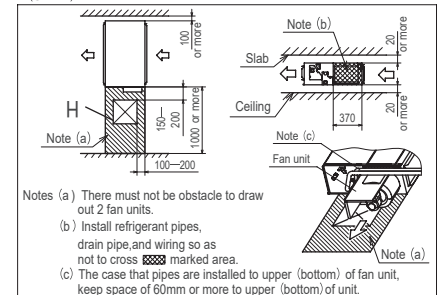Select either of two cases to keep space for installation and services.

(Case 1) From side of unit



					
Set model name		FDUM40ZSXW1VH	FDUM50ZSXW3VH	FDUM60ZSXW3VH	
Indoor unit		FDUM40VH	FDUM50VH	FDUM60VH	
Outdoor unit		SRC40ZSX-W1	SRC50ZSX-W3	SRC60ZSX-W3	
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)		kW 4.0 (1.1 - 4.7)	5.0 (1.1 - 5.6)	5.6 (1.1 - 6.3)	
Nominal heating capacity (Min - Max)		kW 4.5 (0.6 - 5.4)	5.4 (0.6 - 6.3)	6.7 (0.6 - 7.1)	
Power consumption	Cooling/Heating	kW 1.10 / 1.10	1.51 / 1.59	1.54 / 1.75	
EER/COP	Cooling/Heating	3.62 / 4.09	3.31 / 3.39	3.64 / 3.83	
Inrush current		A 5	5	5	
Max. current		15	15	15	
Sound power level*1	Indoor	Cooling/Heating	60 / 60	60 / 60	
	Outdoor	Cooling/Heating	63 / 62	63 / 62	
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	37 / 32 / 29 / 26	
		Heating (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	37 / 32 / 29 / 26	
	Outdoor	Cooling/Heating	52 / 50	52 / 50	
				53 / 54	
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	13 / 10 / 9 / 8	
		Heating (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	13 / 10 / 9 / 8	
	Outdoor	Cooling/Heating	33 / 33	39 / 33	
External static pressure*2		Pa	Standard:35 Max:100		
Exterior dimensions	Indoor	HeightxWidthxDepth	280 x 750 x 635		280 x 950 x 635
	Outdoor		640 x 800(+71) x 290		
Net weight	Indoor		29		34
	Outdoor		45		
Ref.piping size	Liquid/Gas	ømm	6.35(1/4") / 12.7(1/2")		
Refrigerant line (one way) length		m	Max.30		
Vertical height differences		Outdoor is higher/lower	Max.20 / Max.20		
Outdoor operating temperature range	Cooling	°CDB	-15 to 46*3		
	Heating	°CWB	-20 to 20		
Air filter (option)			Filter kit : UM-FL1EF		Filter kit : UM-FL2EF
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2		

					
Set model name		FDUM71VNXWVH	FDUM100VNXWVH	FDUM125VNXWVH	FDUM140VNXWVH
Indoor unit		FDUM71VH	FDUM100VH	FDUM125VH	FDUM140VH
Outdoor unit		FDC71VNX-W	FDC100VNX-W	FDC125VNX-W	FDC140VNX-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)		kW 7.1 (3.2 - 8.0)	10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)		kW 8.0 (3.6 - 9.0)	11.2 (2.7 - 12.5)	14.0 (2.7 - 17.0)	16.0 (2.7 - 18.0)
Power consumption	Cooling/Heating	kW 1.77 / 1.78	2.59 / 2.63	3.49 / 3.61	4.22 / 4.22
EER/COP	Cooling/Heating	4.01 / 4.49	3.86 / 4.26	3.58 / 3.88	3.32 / 3.79
Inrush current		A 5	5	5	5
Max. current		20	26	28	30
Sound power level*1	Indoor	Cooling/Heating	65 / 65	67 / 67	70 / 70
	Outdoor	Cooling/Heating	66 / 66	67 / 67	68 / 70
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	38 / 33 / 29 / 25	44 / 38 / 36 / 30	45 / 40 / 34 / 29
		Heating (P-Hi/Hi/Me/Lo)	38 / 33 / 29 / 25	44 / 38 / 36 / 30	45 / 40 / 34 / 29
	Outdoor	Cooling/Heating	51 / 51	53 / 51	53 / 54
					54 / 54
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	24 / 19 / 15 / 10	36 / 28 / 25 / 19	39 / 32 / 26 / 20
		Heating (P-Hi/Hi/Me/Lo)	24 / 19 / 15 / 10	36 / 28 / 25 / 19	39 / 32 / 26 / 20
	Outdoor	Cooling/Heating	60 / 50	100 / 100	100 / 100
External static pressure*2		Pa	Standard:35 Max:100	Standard:60 Max:100	
Exterior dimensions	Indoor	HeightxWidthxDepth	280 x 950 x 635		280 x 1,370 x 740
	Outdoor		750 x 880(+88) x 340		
Net weight	Indoor		34		54
	Outdoor		60		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max.50		Max.100
Vertical height differences		Outdoor is higher/lower	Max.30 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*3		
	Heating	°CWB	-20 to 20		
Air filter (option)			Filter kit : UM-FL2EF		Filter kit : UM-FL3EF
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2		

NOTES:

The data are measured under the following conditions(ISO-T1, -H1).
 Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
 *1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 *2 : External static pressure is changeable to be set by the remote control. MAX external static pressure is "High static pressure" setting. The values of sound pressure level become 5dB(A) higher at external static pressure of 100Pa.
 *3 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

SPECIFICATIONS - FDUM -

R32		Hyper Inverter		
Set model name		FDUM100VSXWVH	FDUM125VSXWVH	FDUM140VSXWVH
Indoor unit		FDUM100VH	FDUM125VH	FDUM140VH
Outdoor unit		FDC100VSX-W	FDC125VSX-W	FDC140VSX-W
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)		kW 10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)		kW 11.2 (2.7 - 16.0)	14.0 (2.7 - 18.0)	16.0 (2.7 - 20.0)
Power consumption		Cooling/Heating kW 2.59 / 2.63	3.49 / 3.61	4.22 / 4.22
EER/COP		Cooling/Heating 3.86 / 4.26	3.58 / 3.88	3.32 / 3.79
Inrush current		A 5	5	5
Max. current		15	16	17
Sound power level*1	Indoor	Cooling/Heating 65 / 65	67 / 67	70 / 70
	Outdoor	Cooling/Heating 67 / 67	68 / 70	69 / 71
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo) dB(A) 44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
	Outdoor	Heating (P-Hi/Hi/Me/Lo) 44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo) m ³ /min 36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
	Outdoor	Heating (P-Hi/Hi/Me/Lo) 36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
External static pressure*2		Pa 100 / 100	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth mm 280 x 1370 x 740	Standard:60 Max:100	
	Outdoor	1300 x 970 x 370		
Net weight	Indoor	kg 54		
	Outdoor	99		
Ref.piping size		Liquid/Gas ømm 9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m Max.100		
Vertical height differences		Outdoor is higher/lower m Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB -15 to 50*3		
	Heating	°CWB -20 to 20		
Air filter (option)		Filter kit : UM-FL3EF		
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2		

The values are for simultaneous Multi operation.

R32		Hyper Inverter				
Set model name		FDUM71VNXWPVH	FDUM100VNXWPVH	FDUM125VNXWPVH	FDUM140VNXWPVH	FDUM140VNXWTVH
Indoor unit		FDUM40VH x 2	FDUM50VH x 2	FDUM60VH x 2	FDUM71VH x 2	FDUM50VH x 3
Outdoor unit		FDC71VNX-W	FDC100VNX-W	FDC125VNX-W	FDC140VNX-W	FDC140VNX-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz				
Nominal cooling capacity (Min - Max)		kW 7.1 (3.2 - 8.0)	10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)	14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)		kW 8.0 (3.6 - 9.0)	11.2 (2.7 - 12.5)	14.0 (2.7 - 17.0)	16.0 (2.7 - 18.0)	16.0 (2.7 - 18.0)
Power consumption		Cooling/Heating kW 1.76 / 1.80	2.66 / 2.96	3.26 / 3.26	3.97 / 3.91	4.03 / 4.04
EER/COP		Cooling/Heating 4.03 / 4.44	3.76 / 3.79	3.83 / 4.30	3.53 / 4.10	3.48 / 3.96
Inrush current		A 5	5	5	5	5
Max. current		20	26	28	30	30
Sound power level*1	Indoor*4	Cooling/Heating 60 / 60	60 / 60	60 / 60	65 / 65	60 / 60
	Outdoor	Cooling/Heating 66 / 66	67 / 67	68 / 70	69 / 71	69 / 71
Sound pressure level*1	Indoor*4	Cooling (P-Hi/Hi/Me/Lo) dB(A) 37 / 32 / 29 / 26	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25	37 / 32 / 29 / 26
	Outdoor	Heating (P-Hi/Hi/Me/Lo) 37 / 32 / 29 / 26	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25	37 / 32 / 29 / 26
Air flow	Indoor*4	Cooling (P-Hi/Hi/Me/Lo) m ³ /min 13 / 10 / 9 / 8	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10	13 / 10 / 9 / 8
	Outdoor	Heating (P-Hi/Hi/Me/Lo) 13 / 10 / 9 / 8	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10	13 / 10 / 9 / 8
External static pressure*2		Pa 60 / 50	100 / 100	100 / 100	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth mm 280 x 750 x 635	Standard:35 Max:100		280 x 950 x 635	
	Outdoor	750 x 880(+88) x 340	1300 x 970 x 370		280 x 750 x 635	
Net weight	Indoor	kg 29	34		29	
	Outdoor	60	97			
Ref.piping size		Liquid/Gas ømm 9.52(3/8") / 15.88(5/8")				
Refrigerant line (one way) length		m Max.50	Max.100			
Vertical height differences		Outdoor is higher/lower m Max.30 / Max.15	Max.50 / Max.15			
Outdoor operating temperature range	Cooling	°CDB -15 to 50*3				
	Heating	°CWB -20 to 20				
Air filter (option)		Filter kit : UM-FL1EF		Filter kit : UM-FL2EF		Filter kit : UM-FL1EF
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2				

NOTES:

The data are measured under the following conditions(ISO-T1, -H1).
Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
*2 : External static pressure is changeable to be set by the remote control. MAX external static pressure is "High static pressure" setting. The values of sound pressure level become 5dB(A) higher at external static pressure of 100Pa.
*3 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.
*4 : The values are for one indoor unit operation. (Multi system only)

The values are for simultaneous Multi operation.

FDUM

Indoor Unit

R32			Hyper Inverter			
Set model name			FDUM100VSXWPH	FDUM125VSXWPH	FDUM140VSXWPH	FDUM140VSXWTVH
			Twin		Triple	
Indoor unit			FDUM50VH x 2	FDUM60VH x 2	FDUM71VH x 2	FDUM50VH x 3
Outdoor unit			FDC100VSX-W	FDC125VSX-W	FDC140VSX-W	FDC140VSX-W
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)	kW		10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)	14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)	kW		11.2 (2.7 - 16.0)	14.0 (2.7 - 18.0)	16.0 (2.7 - 20.0)	16.0 (2.7 - 20.0)
Power consumption	Cooling/Heating	kW	2.66 / 2.96	3.26 / 3.26	3.97 / 3.91	4.03 / 4.04
EER/COP	Cooling/Heating		3.76 / 3.79	3.83 / 4.30	3.53 / 4.10	3.48 / 3.96
Inrush current		A	5	5	5	5
Max. current			15	16	17	17
Sound power level*1	Indoor*4	Cooling/Heating	60 / 60	60 / 60	65 / 65	60 / 60
	Outdoor	Cooling/Heating	67 / 67	68 / 70	69 / 71	69 / 71
Sound pressure level*1	Indoor*4	Cooling (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25	37 / 32 / 29 / 26
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25	37 / 32 / 29 / 26
Air flow	Indoor*4	Cooling/Heating	53 / 51	53 / 54	54 / 54	54 / 54
	Outdoor	Cooling (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10	13 / 10 / 9 / 8
		Heating (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10	13 / 10 / 9 / 8
		Cooling/Heating	100 / 100	100 / 100	100 / 100	100 / 100
External static pressure*2		Pa	Standard:35 Max:100			
Exterior dimensions	Indoor	HeightxWidthxDepth	280 x 750 x 635	280 x 950 x 635		280 x 750 x 635
	Outdoor		1300 x 970 x 370			
Net weight	Indoor		29	34		29
	Outdoor		99			
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m	Max.100			
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15			
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*3			
	Heating	°CWB	-20 to 20			
Air filter (option)			Filter kit : UM-FL1EF	Filter kit : UM-FL2EF		Filter kit : UM-FL1EF
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2			

SPECIFICATIONS - FDUM -

R410A		Hyper Inverter		
Set model name		FDUM100VNXVH	FDUM125VNXVH	FDUM140VNXVH
Indoor unit		FDUM100VH	FDUM125VH	FDUM140VH
Outdoor unit		FDC100VNX	FDC125VNX	FDC140VNX
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)		kW 10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)		kW 11.2 (4.0 - 12.5)	14.0 (4.0 - 17.0)	16.0 (4.0 - 18.0)
Power consumption		Cooling/Heating kW 2.68 / 3.02	3.49 / 3.77	4.28 / 4.42
EER/COP		Cooling/Heating 3.73 / 3.71	3.58 / 3.71	3.27 / 3.62
Inrush current		A 5	5	5
Max. current		24	26	26
Sound power level*1	Indoor	Cooling/Heating 65 / 65	67 / 67	70 / 70
	Outdoor	Cooling/Heating 70 / 70	70 / 70	72 / 72
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo) dB(A) 44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
		Heating (P-Hi/Hi/Me/Lo) 44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
	Outdoor	Cooling/Heating 48 / 50	48 / 50	49 / 52
		Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo) m ³ /min 36 / 28 / 25 / 19
		Heating (P-Hi/Hi/Me/Lo) 36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
	Outdoor	Cooling/Heating 100 / 100	100 / 100	100 / 100
External static pressure*2		Pa Standard:60 Max:100		
Exterior dimensions	Indoor	mm 280 x 1370 x 740		
	Outdoor	1300 x 970 x 370		
Net weight	Indoor	kg 54		
	Outdoor	105		
Ref.piping size		Liquid/Gas ømm 9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m Max.100		
Vertical height differences		Outdoor is higher/lower m Max.30 / Max.15		
Outdoor operating temperature range	Cooling	°CDB -15 to 43*3		
	Heating	°CWB -20 to 20		
Air filter (option)		Filter kit : UM-FL3EF		
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2		

R410A		Hyper Inverter		
Set model name		FDUM100VSVXVH	FDUM125VSVXVH	FDUM140VSVXVH
Indoor unit		FDUM100VH	FDUM125VH	FDUM140VH
Outdoor unit		FDC100VSVX	FDC125VSVX	FDC140VSVX
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)		kW 10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)		kW 11.2 (4.0 - 16.0)	14.0 (4.0 - 18.0)	16.0 (4.0 - 20.0)
Power consumption		Cooling/Heating kW 2.68 / 3.02	3.49 / 3.77	4.28 / 4.42
EER/COP		Cooling/Heating 3.73 / 3.71	3.58 / 3.71	3.27 / 3.62
Inrush current		A 5	5	5
Max. current		15	15	15
Sound power level*1	Indoor	Cooling/Heating 65 / 65	67 / 67	70 / 70
	Outdoor	Cooling/Heating 70 / 70	70 / 70	72 / 72
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo) dB(A) 44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
		Heating (P-Hi/Hi/Me/Lo) 44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
	Outdoor	Cooling/Heating 48 / 50	48 / 50	49 / 52
		Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo) m ³ /min 36 / 28 / 25 / 19
		Heating (P-Hi/Hi/Me/Lo) 36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
	Outdoor	Cooling/Heating 100 / 100	100 / 100	100 / 100
External static pressure*2		Pa Standard:60 Max:100		
Exterior dimensions	Indoor	mm 280 x 1370 x 740		
	Outdoor	1300 x 970 x 370		
Net weight	Indoor	kg 54		
	Outdoor	105		
Ref.piping size		Liquid/Gas ømm 9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m Max.100		
Vertical height differences		Outdoor is higher/lower m Max.30 / Max.15		
Outdoor operating temperature range	Cooling	°CDB -15 to 43*3		
	Heating	°CWB -20 to 20		
Air filter (option)		Filter kit : UM-FL3EF		
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2		

NOTES:

- The data are measured under the following conditions(ISO-T1).
Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
- *1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
- *2 : External static pressure is changeable to be set by the remote control. MAX external static pressure is "High static pressure" setting. The values of sound pressure level become 5dB(A) higher at external static pressure of 100Pa.
- *3 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.
- *4 : The values are for one indoor unit operation. (Multi system only)

The values are for simultaneous Multi operation.

R410A		Hyper Inverter				
Set model name		FDUM100VNXPVH	FDUM125VNXPVH	FDUM140VNXPVH	FDUM140VNXTVH	
		Twin		Triple		
Indoor unit		FDUM50VH x 2	FDUM60VH x 2	FDUM71VH x 2	FDUM50VH x 3	
Outdoor unit		FDC100VNX	FDC125VNX	FDC140VNX	FDC140VNX	
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz				
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)	14.0 (5.0 - 16.0)	
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 17.0)	16.0 (4.0 - 18.0)	16.0 (4.0 - 18.0)	
Power consumption	Cooling/Heating kW	2.66 / 3.02	3.26 / 3.66	4.36 / 4.35	4.21 / 4.69	
EER/COP	Cooling/Heating	3.76 / 3.71	3.83 / 3.83	3.21 / 3.68	3.33 / 3.41	
Inrush current	A	5	5	5	5	
Max. current		24	26	26	26	
Sound power level*1	Indoor*4	Cooling/Heating	60 / 60	60 / 60	65 / 65	60 / 60
	Outdoor	Cooling/Heating	70 / 70	70 / 70	72 / 72	72 / 72
Sound pressure level*1	Indoor*4	Cooling (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25	37 / 32 / 29 / 26
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25	37 / 32 / 29 / 26
Air flow	Indoor*4	Cooling/Heating	48 / 50	48 / 50	49 / 52	49 / 52
	Outdoor	Cooling (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10	13 / 10 / 9 / 8
		Heating (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10	13 / 10 / 9 / 8
		Cooling/Heating	100 / 100	100 / 100	100 / 100	100 / 100
External static pressure*2	Pa	Standard:35 Max:100				
Exterior dimensions	Indoor	280 x 750 x 635	280 x 950 x 635		280 x 750 x 635	
	Outdoor	HeightxWidthxDPTH	1300 x 970 x 370			
Net weight	Indoor	29	34		29	
	Outdoor		105			
Ref.piping size	Liquid/Gas	9.52(3/8") / 15.88(5/8")				
Refrigerant line (one way) length	m	Max.100				
Vertical height differences	Outdoor is higher/lower	Max.30 / Max.15				
Outdoor operating temperature range	Cooling	°CDB -15 to 43*3				
	Heating	°CWB -20 to 20				
Air filter (option)		Filter kit : UM-FL1EF	Filter kit : UM-FL2EF		Filter kit : UM-FL1EF	
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2				

The values are for simultaneous Multi operation.

R410A		Hyper Inverter				
Set model name		FDUM100VSPVH	FDUM125VSPVH	FDUM140VSPVH	FDUM140VSPVH	
		Twin		Triple		
Indoor unit		FDUM50VH x 2	FDUM60VH x 2	FDUM71VH x 2	FDUM50VH x 3	
Outdoor unit		FDC100VSX	FDC125VSX	FDC140VSX	FDC140VSX	
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz				
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)	14.0 (5.0 - 16.0)	
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 16.0)	14.0 (4.0 - 18.0)	16.0 (4.0 - 20.0)	16.0 (4.0 - 20.0)	
Power consumption	Cooling/Heating kW	2.66 / 3.02	3.26 / 3.66	4.36 / 4.35	4.21 / 4.69	
EER/COP	Cooling/Heating	3.76 / 3.71	3.83 / 3.83	3.21 / 3.68	3.33 / 3.41	
Inrush current	A	5	5	5	5	
Max. current		15	15	15	15	
Sound power level*1	Indoor*4	Cooling/Heating	60 / 60	60 / 60	65 / 65	60 / 60
	Outdoor	Cooling/Heating	70 / 70	70 / 70	72 / 72	72 / 72
Sound pressure level*1	Indoor*4	Cooling (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25	37 / 32 / 29 / 26
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25	37 / 32 / 29 / 26
Air flow	Indoor*4	Cooling/Heating	48 / 50	48 / 50	49 / 52	49 / 52
	Outdoor	Cooling (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10	13 / 10 / 9 / 8
		Heating (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10	13 / 10 / 9 / 8
		Cooling/Heating	100 / 100	100 / 100	100 / 100	100 / 100
External static pressure*2	Pa	Standard:35 Max:100				
Exterior dimensions	Indoor	280 x 750 x 635	280 x 950 x 635		280 x 750 x 635	
	Outdoor	HeightxWidthxDPTH	1300 x 970 x 370			
Net weight	Indoor	29	34		29	
	Outdoor		105			
Ref.piping size	Liquid/Gas	9.52(3/8") / 15.88(5/8")				
Refrigerant line (one way) length	m	Max.100				
Vertical height differences	Outdoor is higher/lower	Max.30 / Max.15				
Outdoor operating temperature range	Cooling	°CDB -15 to 43*3				
	Heating	°CWB -20 to 20				
Air filter (option)		Filter kit : UM-FL1EF	Filter kit : UM-FL2EF		Filter kit : UM-FL1EF	
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2				

SPECIFICATIONS - FDUM -

R32			Micro Inverter		
Set model name			FDUM100VNAWVH	FDUM125VNAWVH	FDUM140VNAWVH
Indoor unit			FDUM100VH	FDUM125VH	FDUM140VH
Outdoor unit			FDC100VNA-W	FDC125VNA-W	FDC140VNA-W
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)			kW 10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)			kW 11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption			Cooling/Heating kW 2.99 / 2.66	4.36 / 3.69	5.13 / 4.21
EER/COP			Cooling/Heating 3.35 / 4.21	2.87 / 3.79	2.65 / 3.68
Inrush current			A 5	5	5
Max. current			A 26	26	27
Sound power level*1	Indoor	Cooling/Heating	65 / 65	67 / 67	70 / 70
	Outdoor	Cooling/Heating	69 / 70	71 / 71	72 / 73
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	dB(A) 44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
		Heating (P-Hi/Hi/Me/Lo)			
	Outdoor	Cooling/Heating	54 / 55	54 / 56	56 / 58
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	m³/min 36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
		Heating (P-Hi/Hi/Me/Lo)			
	Outdoor	Cooling/Heating	75 / 73	75 / 73	75 / 73
External static pressure*2			Pa Standard:60 Max:100		
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	280 x 1370 x 740	
	Outdoor			845 x 970 x 370	
Net weight	Indoor		kg	54	
	Outdoor			77	
Ref.piping size			Liquid/Gas ømm 9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length			m Max.50		
Vertical height differences			Outdoor is higher/lower m Max.50 / Max.15		
Outdoor operating temperature range			Cooling	°CDB -15 to 50*3	
			Heating	°CWB -20 to 20	
Air filter (option)			Filter kit : UM-FL3EF		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2		

R32			Micro Inverter		
Set model name			FDUM100VSAWVH	FDUM125VSAWVH	FDUM140VSAWVH
Indoor unit			FDUM100VH	FDUM125VH	FDUM140VH
Outdoor unit			FDC100VSA-W	FDC125VSA-W	FDC140VSA-W
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)			kW 10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)			kW 11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption			Cooling/Heating kW 2.99 / 2.66	4.36 / 3.69	5.13 / 4.21
EER/COP			Cooling/Heating 3.35 / 4.21	2.87 / 3.79	2.65 / 3.68
Inrush current			A 5	5	5
Max. current			A 17	17	18
Sound power level*1	Indoor	Cooling/Heating	65 / 65	67 / 67	70 / 70
	Outdoor	Cooling/Heating	69 / 70	71 / 71	72 / 73
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	dB(A) 44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
		Heating (P-Hi/Hi/Me/Lo)			
	Outdoor	Cooling/Heating	54 / 55	54 / 56	56 / 58
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	m³/min 36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
		Heating (P-Hi/Hi/Me/Lo)			
	Outdoor	Cooling/Heating	75 / 73	75 / 73	75 / 73
External static pressure*2			Pa Standard:60 Max:100		
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	280 x 1370 x 740	
	Outdoor			845 x 970 x 370	
Net weight	Indoor		kg	54	
	Outdoor			78	
Ref.piping size			Liquid/Gas ømm 9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length			m Max.50		
Vertical height differences			Outdoor is higher/lower m Max.50 / Max.15		
Outdoor operating temperature range			Cooling	°CDB -15 to 50*3	
			Heating	°CWB -20 to 20	
Air filter (option)			Filter kit : UM-FL3EF		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2		

NOTES:

The data are measured under the following conditions(ISO-T1, -H1).

Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

*2 : External static pressure is changeable to be set by the remote control. MAX external static pressure is "High static pressure" setting. The values of sound pressure level become 5dB(A) higher at external static pressure of 100Pa.

*3 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

*4 : The values are for one indoor unit operation. (Multi system only)

The values are for simultaneous Multi operation.

R32		Micro Inverter			
Set model name		FDUM100VNAWPVH	FDUM125VNAWPVH	FDUM140VNAWPVH	FDUM140VNAWTVH
		Twin		Triple	
Indoor unit		FDUM50VH x 2	FDUM60VH x 2	FDUM71VH x 2	FDUM50VH x 3
Outdoor unit		FDC100VNA-W	FDC125VNA-W	FDC140VNA-W	FDC140VNA-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	3.25 / 3.04	4.53 / 3.52	5.02 / 4.20	5.02 / 4.20
EER/COP	Cooling/Heating	3.08 / 3.68	2.76 / 3.98	2.71 / 3.69	2.71 / 3.69
Inrush current	A	5	5	5	5
Max. current		26	26	27	27
Sound power level*1	Indoor*4	Cooling/Heating	60 / 60	60 / 60	65 / 65
	Outdoor	Cooling/Heating	69 / 70	71 / 71	72 / 73
Sound pressure level*1	Indoor*4	Cooling (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25
		Heating (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25
Air flow	Outdoor	Cooling/Heating	54 / 55	54 / 56	56 / 58
		Cooling (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10
Air flow	Outdoor	Heating (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10
		Cooling/Heating	75 / 73	75 / 73	75 / 73
External static pressure*2	Pa	Standard:35 Max:100			
Exterior dimensions	Indoor	HeightxWidthxDepth	280 x 750 x 635	280 x 950 x 635	280 x 750 x 635
	Outdoor	HeightxWidthxDepth	845 x 970 x 370		
Net weight	Indoor	kg	29	34	29
	Outdoor	kg	77		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max.50		
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*3		
	Heating	°CWB	-20 to 20		
Air filter (option)		Filter kit : UM-FL1EF	Filter kit : UM-FL2EF		Filter kit : UM-FL1EF
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2			

The values are for simultaneous Multi operation.

R32		Micro Inverter			
Set model name		FDUM100VSAWPVH	FDUM125VSAWPVH	FDUM140VSAWPVH	FDUM140VSAWTVH
		Twin		Triple	
Indoor unit		FDUM50VH x 2	FDUM60VH x 2	FDUM71VH x 2	FDUM50VH x 3
Outdoor unit		FDC100VSA-W	FDC125VSA-W	FDC140VSA-W	FDC140VSA-W
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	3.25 / 3.04	4.53 / 3.52	5.02 / 4.20	5.02 / 4.20
EER/COP	Cooling/Heating	3.08 / 3.68	2.76 / 3.98	2.71 / 3.69	2.71 / 3.69
Inrush current	A	5	5	5	5
Max. current		17	17	18	18
Sound power level*1	Indoor*4	Cooling/Heating	60 / 60	60 / 60	65 / 65
	Outdoor	Cooling/Heating	69 / 70	71 / 71	72 / 73
Sound pressure level*1	Indoor*4	Cooling (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25
		Heating (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25
Air flow	Outdoor	Cooling/Heating	54 / 55	54 / 56	56 / 58
		Cooling (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10
Air flow	Outdoor	Heating (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10
		Cooling/Heating	75 / 73	75 / 73	75 / 73
External static pressure*2	Pa	Standard:35 Max:100			
Exterior dimensions	Indoor	HeightxWidthxDepth	280 x 750 x 635	280 x 950 x 635	280 x 750 x 635
	Outdoor	HeightxWidthxDepth	845 x 970 x 370		
Net weight	Indoor	kg	29	34	29
	Outdoor	kg	78		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max.50		
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*3		
	Heating	°CWB	-20 to 20		
Air filter (option)		Filter kit : UM-FL1EF	Filter kit : UM-FL2EF		Filter kit : UM-FL1EF
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2			

SPECIFICATIONS - FDUM -

The values are for simultaneous Multi operation.

R32		Micro Inverter			
		FDUM200VSAWPVH	FDUM250VSAWPVH	FDUM280VSAWPVH	FDUM200VSAWTVH
Set model name		Twin		Triple	
Indoor unit		FDUM100VH x 2	FDUM125VH x 2	FDUM140VH x 2	FDUM71VH x 3
Outdoor unit		FDC200VSA-W	FDC250VSA-W	FDC280VSA-W	FDC200VSA-W
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)		kW 20.0 (6.8 - 22.4)	25.0 (6.8 - 28.0)	27.0 (7.8 - 31.5)	20.0 (6.8 - 22.4)
Nominal heating capacity (Min - Max)		kW 22.4 (6.7 - 25.0)	28.0 (5.2 - 31.5)	30.0 (6.3 - 33.5)	22.4 (6.7 - 25.0)
Power consumption		Cooling/Heating kW 6.58 / 5.59	8.74 / 7.90	10.05 / 8.47	6.58 / 5.59
EER/COP		Cooling/Heating 3.04 / 4.01	2.86 / 3.54	2.69 / 3.54	3.04 / 4.01
Inrush current		A 5	5	5	5
Max. current		19	25	22	19
Sound power level*1	Indoor	Cooling/Heating 65 / 65	67 / 67	70 / 70	65 / 65
	Outdoor	Cooling/Heating 72 / 74	73 / 75	75 / 77	72 / 74
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo) dB(A) 44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30	38 / 33 / 29 / 25
	Outdoor	Heating (P-Hi/Hi/Me/Lo) 44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30	38 / 33 / 29 / 25
Air flow	Indoor	Cooling/Heating m ³ /min 58 / 59	58 / 62	61 / 63	58 / 59
	Outdoor	Cooling (P-Hi/Hi/Me/Lo) 36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22	24 / 19 / 15 / 10
External static pressure*2		Pa 36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22	24 / 19 / 15 / 10
Exterior dimensions		Indoor HeightxWidthxDepth mm 280 x 1370 x 740	Standard:60 Max:100		Standard:35 Max:100
Net weight		Outdoor 144	145	155	144
Ref.piping size		Liquid/Gas ømm 9.52(3/8") / 22.22(7/8")	12.7(1/2") / 22.22(7/8")		9.52(3/8") / 22.22(7/8")
Refrigerant line (one way) length		m Max.70	Max.60		Max.70
Vertical height differences		Outdoor is higher/lower m Max.50*5 / Max.15	Max.15		
Outdoor operating temperature range		Cooling °CDB -15 to 50*3	-15 to 50*3		
		Heating °CWB -20 to 20	-20 to 20		
Air filter (option)		Filter kit : UM-FL3EF		Filter kit : UM-FL2EF	
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2			

R410A		Micro Inverter		
		FDUM100VNAVH	FDUM125VNAVH	FDUM140VNAVH
Set model name		FDUM100VH	FDUM125VH	FDUM140VH
Outdoor unit		FDC100VNA	FDC125VNA	FDC140VNA
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)		kW 10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)		kW 11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption		Cooling/Heating kW 2.84 / 2.78	4.36 / 3.69	4.93 / 4.21
EER/COP		Cooling/Heating 3.52 / 4.03	2.87 / 3.79	2.76 / 3.68
Inrush current		A 5	5	5
Max. current		26	26	27
Sound power level*1	Indoor	Cooling/Heating 65 / 65	67 / 67	70 / 70
	Outdoor	Cooling/Heating 70 / 70	71 / 71	73 / 73
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo) dB(A) 44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
	Outdoor	Heating (P-Hi/Hi/Me/Lo) 44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
Air flow	Indoor	Cooling/Heating m ³ /min 54 / 56	55 / 57	57 / 59
	Outdoor	Cooling (P-Hi/Hi/Me/Lo) 36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
External static pressure*2		Pa 36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
Exterior dimensions		Indoor HeightxWidthxDepth mm 280 x 1370 x 740	Standard:60 Max:100	
Net weight		Outdoor 845 x 970 x 370	845 x 970 x 370	
Ref.piping size		Liquid/Gas ømm 9.52(3/8") / 15.88(5/8")	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m Max.50	Max.50	
Vertical height differences		Outdoor is higher/lower m Max.50 / Max.15	Max.15	
Outdoor operating temperature range		Cooling °CDB -15 to 50*3	-15 to 50*3	
		Heating °CWB -20 to 20	-20 to 20	
Air filter (option)		Filter kit : UM-FL3EF		
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2		

NOTES:

<p>The data are measured under the following conditions(R32 : ISO-T1, -H1 / R410A : ISO-T1). Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. *1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions. *2 : External static pressure is changeable to be set by the remote control. MAX external static pressure is "High static pressure" setting. The values of sound pressure level become 5dB(A) higher at external static pressure of 100Pa. *3 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down. *4 : The values are for one indoor unit operation. (Multi system only) *5 : In case of following conditions:Max.50m(Outdoor unit is higher & Outdoor temperature ≤ 43°C), Max.30m(Outdoor unit is higher & Outdoor temperature > 43°C)</p>
--

R410A		Micro Inverter			
Set model name		FDUM100VSAVH	FDUM125VSAVH	FDUM140VSAVH	
Indoor unit		FDUM100VH	FDUM125VH	FDUM140VH	
Outdoor unit		FDC100VSA	FDC125VSA	FDC140VSA	
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	
Power consumption	Cooling/Heating kW	2.84 / 2.78	4.36 / 3.69	4.93 / 4.21	
EER/COP	Cooling/Heating	3.52 / 4.03	2.87 / 3.79	2.76 / 3.68	
Inrush current		5	5	5	
Max. current		17	17	18	
Sound power level*1	Indoor	Cooling/Heating	65 / 65	67 / 67	70 / 70
	Outdoor	Cooling/Heating	70 / 70	71 / 71	73 / 73
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
		Heating (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29	47 / 40 / 35 / 30
	Outdoor	Cooling/Heating	54 / 56	55 / 57	57 / 59
		Cooling (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
Air flow	Indoor	Heating (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20	48 / 35 / 28 / 22
		Cooling/Heating	75 / 73	75 / 73	75 / 73
External static pressure*2	Pa	Standard:60 Max:100			
Exterior dimensions	Indoor	HeightxWidthxDepth	280 x 1370 x 740		
	Outdoor		845 x 970 x 370		
Net weight	Indoor		54		
	Outdoor		82		
Ref.piping size	Liquid/Gas	ømm 9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m Max.50			
Vertical height differences	Outdoor is higher/lower	m Max.50 / Max.15			
Outdoor operating temperature range	Cooling	°CDB -15 to 50*3			
	Heating	°CWB -20 to 20			
Air filter (option)		Filter kit : UM-FL3EF			
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2			

The values are for simultaneous Multi operation.

R410A		Micro Inverter			
Set model name		FDUM100VNPVH	FDUM125VNPVH	FDUM140VNPVH	FDUM140VNPVH
Indoor unit		FDUM50VH x 2	FDUM60VH x 2	FDUM71VH x 2	FDUM50VH x 3
Outdoor unit		FDC100VNA	FDC125VNA	FDC140VNA	FDC140VNA
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating kW	3.25 / 3.21	4.53 / 3.75	5.02 / 4.20	5.02 / 4.20
EER/COP	Cooling/Heating	3.08 / 3.49	2.76 / 3.73	2.71 / 3.69	2.71 / 3.69
Inrush current		5	5	5	5
Max. current		26	26	27	27
Sound power level*1	Indoor*4	Cooling/Heating	60 / 60	60 / 60	65 / 65
	Outdoor	Cooling/Heating	70 / 70	71 / 71	73 / 73
Sound pressure level*1	Indoor*4	Cooling (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25
		Heating (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25
	Outdoor	Cooling/Heating	54 / 56	55 / 57	57 / 59
		Cooling (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10
Air flow	Indoor*4	Heating (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10
		Cooling/Heating	75 / 73	75 / 73	75 / 73
External static pressure*2	Pa	Standard:35 Max:100			
Exterior dimensions	Indoor	HeightxWidthxDepth	280 x 750 x 635		
	Outdoor		280 x 950 x 635		
Net weight	Indoor		29		
	Outdoor		80		
Ref.piping size	Liquid/Gas	ømm 9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m Max.50			
Vertical height differences	Outdoor is higher/lower	m Max.50 / Max.15			
Outdoor operating temperature range	Cooling	°CDB -15 to 50*3			
	Heating	°CWB -20 to 20			
Air filter (option)		Filter kit : UM-FL1EF	Filter kit : UM-FL2EF	Filter kit : UM-FL1EF	Filter kit : UM-FL1EF
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2			

SPECIFICATIONS - FDUM -

The values are for simultaneous Multi operation.

R410A			Micro Inverter			
Set model name			FDUM100VSAPVH	FDUM125VSAPVH	FDUM140VSAPVH	FDUM140VSATVH
			Twin		Triple	
Indoor unit			FDUM50VH x 2	FDUM60VH x 2	FDUM71VH x 2	FDUM50VH x 3
Outdoor unit			FDC100VSA	FDC125VSA	FDC140VSA	FDC140VSA
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)	kW		10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW		11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	kW	3.25 / 3.21	4.53 / 3.75	5.02 / 4.20	5.02 / 4.20
EER/COP	Cooling/Heating		3.08 / 3.49	2.76 / 3.73	2.71 / 3.69	2.71 / 3.69
Inrush current		A	5	5	5	5
Max. current			17	17	18	18
Sound power level*1	Indoor*4	Cooling/Heating	60 / 60	60 / 60	65 / 65	60 / 60
	Outdoor	Cooling/Heating	70 / 70	71 / 71	73 / 73	73 / 73
Sound pressure level*1	Indoor*4	Cooling (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25	37 / 32 / 29 / 26
		Heating (P-Hi/Hi/Me/Lo)	37 / 32 / 29 / 26	36 / 31 / 28 / 25	38 / 33 / 29 / 25	37 / 32 / 29 / 26
	Outdoor	Cooling/Heating	54 / 56	55 / 57	57 / 59	57 / 59
Air flow	Indoor*4	Cooling (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10	13 / 10 / 9 / 8
		Heating (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 8	20 / 15 / 13 / 10	24 / 19 / 15 / 10	13 / 10 / 9 / 8
	Outdoor	Cooling/Heating	75 / 73	75 / 73	75 / 73	75 / 73
External static pressure*2		Pa	Standard:35 Max:100			
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	280 x 750 x 635	280 x 950 x 635	280 x 750 x 635
	Outdoor		845 x 970 x 370			
Net weight	Indoor		kg	29	34	29
	Outdoor		82			
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m	Max.50			
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15			
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*3			
	Heating	°CWB	-20 to 20			
Air filter (option)			Filter kit : UM-FL1EF	Filter kit : UM-FL2EF	Filter kit : UM-FL1EF	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2			

The values are for simultaneous Multi operation.

R410A			Micro Inverter			
Set model name			FDUM200VSAPVH	FDUM250VSAPVH	FDUM200VSATVH	
			Twin		Triple	
Indoor unit			FDUM100VH x 2	FDUM125VH x 2	FDUM71VH x 3	
Outdoor unit			FDC200VSA	FDC250VSA	FDC200VSA	
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)	kW		19.0 (5.2 - 22.4)	24.0 (6.9 - 28.0)	19.0 (5.2 - 22.4)	
Nominal heating capacity (Min - Max)	kW		22.4 (3.3 - 25.0)	27.0 (5.5 - 31.5)	22.4 (3.3 - 25.0)	
Power consumption	Cooling/Heating	kW	6.51 / 6.04	8.33 / 7.52	6.46 / 6.15	
EER/COP	Cooling/Heating		2.92 / 3.71	2.88 / 3.59	2.94 / 3.64	
Inrush current		A	5	5	5	
Max. current			22	24	22	
Sound power level*1	Indoor*4	Cooling/Heating	65 / 65	67 / 67	65 / 65	
	Outdoor	Cooling/Heating	72 / 74	73 / 75	72 / 74	
Sound pressure level*1	Indoor*4	Cooling (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29	38 / 33 / 29 / 25	
		Heating (P-Hi/Hi/Me/Lo)	44 / 38 / 36 / 30	45 / 40 / 34 / 29	38 / 33 / 29 / 25	
	Outdoor	Cooling/Heating	58 / 59	59 / 62	58 / 59	
Air flow	Indoor*4	Cooling (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20	24 / 19 / 15 / 10	
		Heating (P-Hi/Hi/Me/Lo)	36 / 28 / 25 / 19	39 / 32 / 26 / 20	24 / 19 / 15 / 10	
	Outdoor	Cooling/Heating	135 / 135	143 / 151	135 / 135	
External static pressure*2		Pa	Standard:60 Max:100		Standard:35 Max:100	
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	280 x 1370 x 740		280 x 950 x 635
	Outdoor		1300 x 970 x 370	1505 x 970 x 370	1300 x 970 x 370	
Net weight	Indoor		kg	115	143	34
	Outdoor		54	115		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 22.22(7/8")	12.7(1/2") / 22.22(7/8")	9.52(3/8") / 22.22(7/8")	
Refrigerant line (one way) length		m	Max.70			
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15			
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*3			
	Heating	°CWB	-15 to 20			
Air filter (option)			Filter kit : UM-FL3EF		Filter kit : UM-FL2EF	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2			

NOTES:

The data are measured under the following conditions(R32 : ISO-T1, -H1 / R410A : ISO-T1).
 Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
 *1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 *2 : External static pressure is changeable to be set by the remote control. MAX external static pressure is "High static pressure" setting. The values of sound pressure level become 5dB(A) higher at external static pressure of 100Pa.
 *3 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.
 *4 : The values are for one indoor unit operation. (Multi system only)

R32			Standard Inverter			
Set model name			FDUM71VNPVH	FDUM90VNPVH	FDUM100VNPVH	FDUM125VNPVH
Indoor unit			FDUM71VH	FDUM100VH	FDUM100VH	FDUM125VH
Outdoor unit			FDC71VNP-W	FDC90VNP-W	FDC100VNP-W	FDC125VNP-W
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)			kW 7.1 (1.5 - 7.3)	9.0 (2.1 - 9.5)	10.0 (2.1 - 10.2)	12.1 (5.0 - 12.1)
Nominal heating capacity (Min - Max)			kW 7.1 (1.1 - 7.3)	9.0 (1.7 - 9.5)	10.0 (1.7 - 10.4)	12.1 (4.0 - 13.3)
Power consumption			Cooling/Heating kW 2.60 / 1.89	2.62 / 1.98	3.08 / 2.45	3.85 / 3.28
EER/COP			Cooling/Heating 2.73 / 3.76	3.44 / 4.55	3.25 / 4.08	3.14 / 3.69
Inrush current			A 5	5	5	5
Max. current			15.8	19	19	20
Sound power level*1	Indoor	Cooling/Heating	65 / 65	65 / 65	65 / 65	67 / 67
	Outdoor	Cooling/Heating	67 / 67	67 / 66	68 / 67	73 / 72
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	dB(A) 38 / 33 / 29 / 25	44 / 38 / 36 / 30	44 / 38 / 36 / 30	45 / 40 / 34 / 29
		Heating (P-Hi/Hi/Me/Lo)				
	Outdoor	Cooling/Heating	54 / 54	55 / 53	56 / 54	57 / 57
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	m³/min 24 / 19 / 15 / 10	36 / 28 / 25 / 19	36 / 28 / 25 / 19	39 / 32 / 26 / 20
		Heating (P-Hi/Hi/Me/Lo)				
	Outdoor	Cooling/Heating	42 / 42	59 / 55	63 / 55	75 / 79
External static pressure*2			Pa Standard:35 Max:100	Standard:60 Max:100		
Exterior dimensions	Indoor	HeightxWidthxDepth	mm 280 x 950 x 635		280 x 1370 x 740	
	Outdoor		640 x 800(+71) x 290		750 x 880(+88) x 340	845 x 970 x 370
Net weight	Indoor		kg 34		54	
	Outdoor		45		57	73
Ref.piping size			Liquid/Gas ømm 6.35(1/4") / 12.7(1/2")	6.35(1/4") / 15.88(5/8")		9.52(3/8") / 15.88(5/8")
Refrigerant line (one way) length			m Max.30			
Vertical height differences			Outdoor is higher/lower Max.20 / Max.20			
Outdoor operating temperature range			Cooling	°CDB -15 to 46*3		
			Heating	°CWB -15 to 20		
Air filter (option)			Filter kit : UM-FL2EF		Filter kit : UM-FL3EF	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-KIT4-E2			

SRK Indoor Unit Wall Mounted

SRK 50-60
Only used with
Multi System.



SRK 71-100
Common to the
both case of
Single and Multi



Wireless LAN Built-in
SRK 71-100
Only connected to
R32 outdoor unit.



Wireless
remote control



Remote control (Option)

Wired



RC-EX3D



RC-E5



RC-ES1



RCH-E3

*Not all functions available with all remote control options.

Elegant Timeless Design

The SRK series air-conditioners have been innovatively designed with rounded contours that fit beautifully into any of Europe's diverse interior settings.


The design was created by the Italian industrial design studio Tensa srl, based in Milan, to respond to a broad spectrum of requirements. (SRK50-60)

Jet Air Technology

We used the same aerodynamic analysis technology as used in developing jet engines.



CFD (computational fluid dynamics), commonly used for precision jet engine blade design, has now transformed airconditioning. Our cutting-edge indoor air distribution system ensures very quiet operation and unparalleled energy efficiency across diverse indoor spaces.



Colours in the figure show the air speed

Long Reach Air Flow


Long reach airflow is achieved by Jet technology. Good for large living rooms and shops, which increases comfort.



Flap Control System


The flap can swing within the range of upper and lower flap position selected.

* The wireless remote control is not applicable to the flap control system.



Indoor Unit Connection

Up to three indoor units are connectable to one outdoor unit.

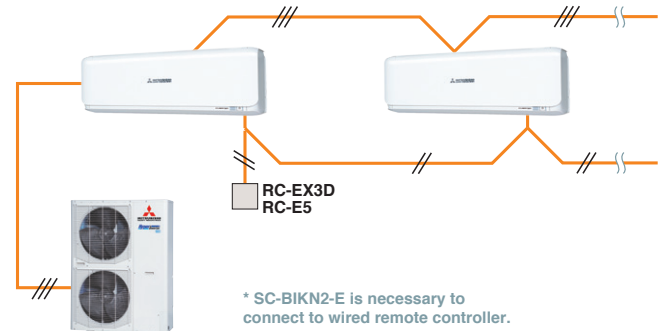

* SC-BIKN2-E is necessary to connect to wired remote controller.

SC-BIKN2-E connection (Option)

Interface kit can be built into indoor unit. (SRK50-60)

* SC-BIKN2-E cannot be used simultaneously with the Wireless LAN control system



OUTDOOR UNIT

		Hyper Inverter		Micro Inverter		
FDC		71VNX-W	100-140VN(S)X-W	100-140VN(S)A-W	-	200VSA-W
		-	100-140VN(S)X	100VN(S)A	200VSA	-
model						
Chargeless		30m		30m		
Height x Width x Depth (mm)		750 x 880(+88) x 340	1300 x 970 x 370	845 x 970 x 370	1300 x 970 x 370	1505 x 970 x 370



		Standard Inverter	
FDC		71VNP-W	100VNP-W
		-	-
model			
Chargeless		15m	
Height x Width x Depth (mm)		640 x 800(+71) x 290	750 x 880(+88) x 340

DIMENSIONS (Unit:mm) - SRK -

Models SRK50ZSX-W, 60ZSX-W

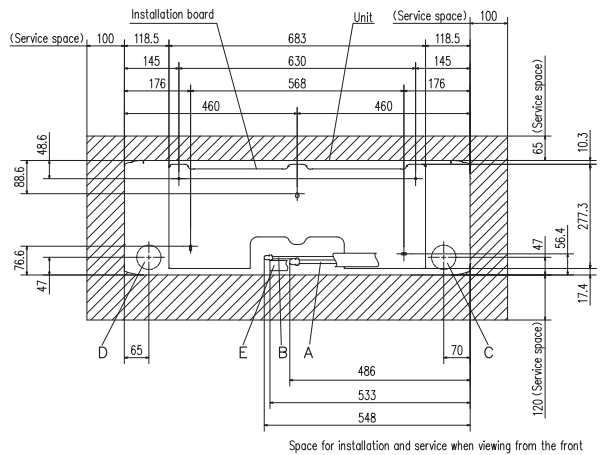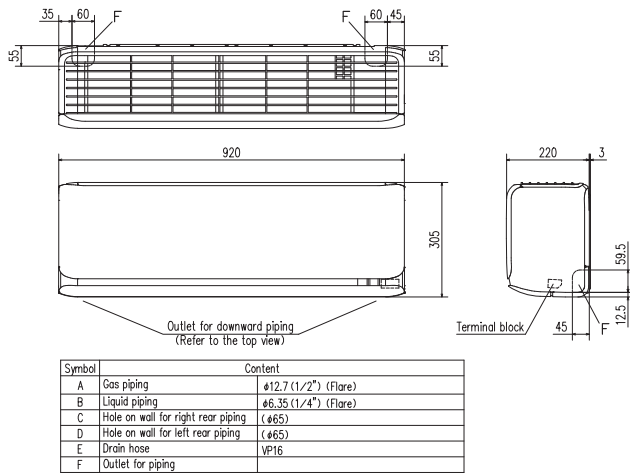

Models SRK71ZR-W, 71ZR-WF, 100ZR-W, 100ZR-WF

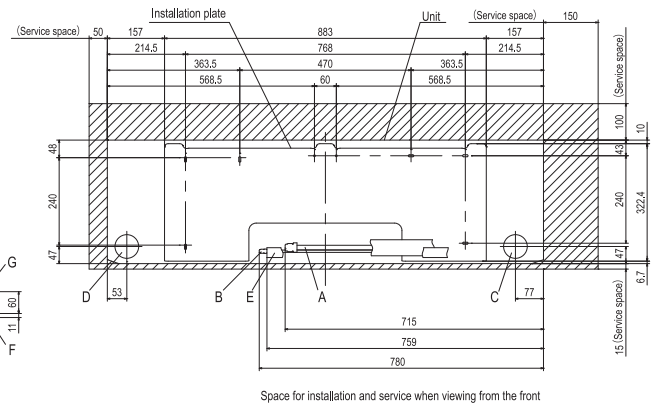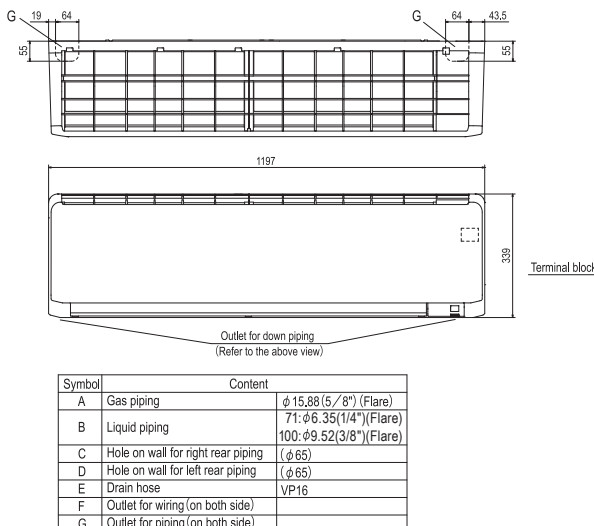

SPECIFICATIONS - SRK -

R32		Hyper Inverter					
Set model name		SRK71VNXWZRF	SRK71VNXWZR	SRK100VNXWZRF	SRK100VNXWZR	SRK100VVSXWZRF	SRK100VVSXWZR
Indoor unit		SRK71ZR-WF	SRK71ZR-W	SRK100ZR-WF	SRK100ZR-W	SRK100ZR-WF	SRK100ZR-W
Outdoor unit		FDC71VNX-W	FDC71VNX-W	FDC100VNX-W	FDC100VNX-W	FDC100VVSX-W	FDC100VVSX-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz				3 Phase 380-415V, 50Hz / 380V, 60Hz	
Nominal cooling capacity (Min - Max)		kW 7.1 (3.2 - 8.0)		kW 10.0 (3.5 - 11.2)		kW 10.0 (3.5 - 11.2)	
Nominal heating capacity (Min - Max)		kW 8.0 (3.6 - 9.0)		kW 11.2 (2.7 - 12.5)		kW 11.2 (2.7 - 16.0)	
Power consumption		kW 1.93 / 1.78		kW 2.74 / 3.04		kW 2.74 / 3.04	
EER/COP		Cooling/Heating 3.68 / 4.49		Cooling/Heating 3.65 / 3.69		Cooling/Heating 3.65 / 3.69	
Inrush current		A 5		A 5		A 5	
Max. current		A 19.1		A 25		A 14	
Sound power level*1	Indoor	Cooling/Heating 57 / 60		Cooling/Heating 63 / 63		Cooling/Heating 63 / 63	
	Outdoor	Cooling/Heating 66 / 66		Cooling/Heating 67 / 67		Cooling/Heating 67 / 67	
Sound pressure level*1	Indoor	Cooling (Hi/Me/Lo/Ulo) 44 / 41 / 37 / 25		Cooling (Hi/Me/Lo/Ulo) 48 / 45 / 40 / 27		Cooling (Hi/Me/Lo/Ulo) 48 / 45 / 40 / 27	
	Outdoor	Cooling (Hi/Me/Lo/Ulo) 46 / 39 / 35 / 28		Cooling (Hi/Me/Lo/Ulo) 48 / 43 / 38 / 30		Cooling (Hi/Me/Lo/Ulo) 48 / 43 / 38 / 30	
Air flow	Indoor	Cooling (Hi/Me/Lo/Ulo) 20.5 / 18.6 / 16.2 / 10.4		Cooling (Hi/Me/Lo/Ulo) 24.5 / 21.3 / 17.6 / 10.4		Cooling (Hi/Me/Lo/Ulo) 24.5 / 21.3 / 17.6 / 10.4	
	Outdoor	Heating (Hi/Me/Lo/Ulo) 25.0 / 19.8 / 17.3 / 13.3		Heating (Hi/Me/Lo/Ulo) 27.5 / 23.2 / 19.1 / 13.6		Heating (Hi/Me/Lo/Ulo) 27.5 / 23.2 / 19.1 / 13.6	
Exterior dimensions	Indoor	HeightxWidthxDepth mm 339 x 1197 x 262		HeightxWidthxDepth mm 1300 x 970 x 370		HeightxWidthxDepth mm 1300 x 970 x 370	
	Outdoor	HeightxWidthxDepth mm 750 x 880(+88) x 340		HeightxWidthxDepth mm 1300 x 970 x 370		HeightxWidthxDepth mm 1300 x 970 x 370	
Net weight	Indoor	kg 15.5		kg 16.5		kg 16.5	
	Outdoor	kg 60		kg 97		kg 99	
Ref.piping size	Liquid/Gas	ømm 9.52(3/8") / 15.88(5/8")					
Refrigerant line (one way) length		m Max.50			m Max.100		
Vertical height differences	Outdoor is higher/lower	m Max.30 / Max.15			m Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB -15 to 50*2					
	Heating	°CWB -20 to 20					
Air filter, Q'ty		Polypropylene net x 2(Washable)					
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 & Interface kit:SC-BIKN2-E					

The values are for simultaneous Multi operation.

R32		Hyper Inverter		
Set model name		SRK100VNXWPZSX	SRK125VNXWPZSX	SRK140VNXWTZSX
Indoor unit		SRK50ZSX-W x 2	SRK60ZSX-W x 2	SRK50ZSX-W x 3
Outdoor unit		FDC100VNX-W	FDC125VNX-W	FDC140VNX-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)		kW 10.0 (3.5 - 11.2)		kW 14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)		kW 11.2 (2.7 - 12.5)		kW 16.0 (2.7 - 18.0)
Power consumption		kW 2.47 / 2.60		kW 4.03 / 4.04
EER/COP		Cooling/Heating 4.05 / 4.31		Cooling/Heating 3.48 / 3.96
Inrush current		A 5		A 5
Max. current		A 25		A 27
Sound power level*1	Indoor*3	Cooling/Heating 59 / 62		Cooling/Heating 59 / 62
	Outdoor	Cooling/Heating 67 / 67		Cooling/Heating 69 / 71
Sound pressure level*1	Indoor*3	Cooling (Hi/Me/Lo/Ulo) 44 / 39 / 31 / 22		Cooling (Hi/Me/Lo/Ulo) 44 / 39 / 31 / 22
	Outdoor	Cooling (Hi/Me/Lo/Ulo) 46 / 41 / 33 / 23		Cooling (Hi/Me/Lo/Ulo) 46 / 41 / 33 / 23
Air flow	Indoor*3	Cooling (Hi/Me/Lo/Ulo) 14.3 / 12.4 / 7.8 / 5.4		Cooling (Hi/Me/Lo/Ulo) 14.3 / 12.4 / 7.8 / 5.4
	Outdoor	Heating (Hi/Me/Lo/Ulo) 17.3 / 14.3 / 9.8 / 6.2		Heating (Hi/Me/Lo/Ulo) 17.3 / 14.3 / 9.8 / 6.2
Exterior dimensions	Indoor	HeightxWidthxDepth mm 305 x 920 x 220		
	Outdoor	HeightxWidthxDepth mm 1300 x 970 x 370		
Net weight	Indoor	kg 13		
	Outdoor	kg 97		
Ref.piping size	Liquid/Gas	ømm 9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m Max.100		m Max.65
Vertical height differences	Outdoor is higher/lower	m Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB -15 to 50*2		
	Heating	°CWB -20 to 20		
Air filter, Q'ty		Polypropylene net x 2(Washable)		
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 & Interface kit:SC-BIKN2-E		

NOTES:

The data are measured under the following conditions (R32 : ISO-T1, -H1 / R410A : ISO-T1).

Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

*3 : The values are for one indoor unit operation. (Multi system only)

The values are for simultaneous Multi operation.

R32			Hyper Inverter		
Set model name			SRK100VSXWPZSX	SRK125VSXWPZSX	SRK140VSXWTZSX
			Twin		Triple
Indoor unit			SRK50ZSX-W x 2	SRK60ZSX-W x 2	SRK50ZSX-W x 3
Outdoor unit			FDC100VSX-W	FDC125VSX-W	FDC140VSX-W
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)		kW	10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)		kW	11.2 (2.7 - 12.5)	14.0 (2.7 - 18.0)	16.0 (2.7 - 20.0)
Power consumption	Cooling/Heating	kW	2.47 / 2.60	3.43 / 3.42	4.03 / 4.04
EER/COP	Cooling/Heating		4.05 / 4.31	3.64 / 4.09	3.48 / 3.96
Inrush current		A	5	5	5
Max. current			14	14	14
Sound power level*1	Indoor*3	Cooling/Heating	59 / 62	62 / 63	59 / 62
	Outdoor	Cooling/Heating	67 / 67	68 / 70	69 / 71
Sound pressure level*1	Indoor*3	Cooling (Hi/Me/Lo/Ulo)	44 / 39 / 31 / 22	46 / 41 / 33 / 22	44 / 39 / 31 / 22
		Heating (Hi/Me/Lo/Ulo)	46 / 41 / 33 / 23	46 / 42 / 34 / 23	46 / 41 / 33 / 23
	Outdoor	Cooling/Heating	53 / 51	53 / 54	54 / 54
Air flow	Indoor*3	Cooling (Hi/Me/Lo/Ulo)	14.3 / 12.4 / 7.8 / 5.4	16.3 / 13.4 / 8.9 / 5.4	14.3 / 12.4 / 7.8 / 5.4
		Heating (Hi/Me/Lo/Ulo)	17.3 / 14.3 / 9.8 / 6.2	17.8 / 13.7 / 10.9 / 6.2	17.3 / 14.3 / 9.8 / 6.2
	Outdoor	Cooling/Heating	100 / 100	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	305 x 920 x 220		
	Outdoor		1300 x 970 x 370		
Net weight	Indoor		13		
	Outdoor		99		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max.100		Max.65
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2		
	Heating	°CWB	-20 to 20		
Air filter, Q'ty			Polypropylene net x 2(Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 & Interface kit:SC-BIKN2-E		

The values are for simultaneous Multi operation.

R410A			Hyper Inverter		
Set model name			SRK100VNXPZSX	SRK125VNXPZSX	SRK140VNXTZSX
			Twin		Triple
Indoor unit			SRK50ZSX-W x 2	SRK60ZSX-W x 2	SRK50ZSX-W x 3
Outdoor unit			FDC100VNX	FDC125VNX	FDC140VNX
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)		kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)		kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 17.0)	16.0 (4.0 - 18.0)
Power consumption	Cooling/Heating	kW	2.66 / 2.60	3.60 / 3.48	3.98 / 3.68
EER/COP	Cooling/Heating		3.76 / 4.31	3.47 / 4.02	3.52 / 4.35
Inrush current		A	5	5	5
Max. current			24	26	26
Sound power level*1	Indoor*3	Cooling/Heating	59 / 62	62 / 63	59 / 62
	Outdoor	Cooling/Heating	70 / 70	70 / 70	72 / 72
Sound pressure level*1	Indoor*3	Cooling (Hi/Me/Lo/Ulo)	44 / 39 / 31 / 22	46 / 41 / 33 / 22	44 / 39 / 31 / 22
		Heating (Hi/Me/Lo/Ulo)	46 / 41 / 33 / 23	46 / 42 / 34 / 23	46 / 41 / 33 / 23
	Outdoor	Cooling/Heating	48 / 50	48 / 50	49 / 52
Air flow	Indoor*3	Cooling (Hi/Me/Lo/Ulo)	14.3 / 12.4 / 7.8 / 5.4	16.3 / 13.4 / 8.9 / 5.4	14.3 / 12.4 / 7.8 / 5.4
		Heating (Hi/Me/Lo/Ulo)	17.3 / 14.3 / 9.8 / 6.2	17.8 / 13.7 / 10.9 / 6.2	17.3 / 14.3 / 9.8 / 6.2
	Outdoor	Cooling/Heating	100 / 100	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	305 x 920 x 220		
	Outdoor		1300 x 970 x 370		
Net weight	Indoor		13		
	Outdoor		105		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max.100		
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 43*2		
	Heating	°CWB	-20 to 20		
Air filter, Q'ty			Polypropylene net x 2(Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 & Interface kit:SC-BIKN2-E		

SPECIFICATIONS - SRK -

The values are for simultaneous Multi operation.

R410A			Hyper Inverter		
Set model name			SRK100VSPZSX	SRK125VSPZSX	SRK140VSTZSX
			Twin		Triple
Indoor unit			SRK50ZSX-W x 2	SRK60ZSX-W x 2	SRK50ZSX-W x 3
Outdoor unit			FDC100VSX	FDC125VSX	FDC140VSX
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW		10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)	kW		11.2 (4.0 - 16.0)	14.0 (4.0 - 18.0)	16.0 (4.0 - 20.0)
Power consumption	Cooling/Heating	kW	2.66 / 2.60	3.60 / 3.48	3.98 / 3.68
EER/COP	Cooling/Heating		3.76 / 4.31	3.47 / 4.02	3.52 / 4.35
Inrush current		A	5	5	5
Max. current			15	15	15
Sound power level*1	Indoor*3	Cooling/Heating	59 / 62	62 / 63	59 / 62
	Outdoor	Cooling/Heating	70 / 70	70 / 70	72 / 72
Sound pressure level*1	Indoor*3	Cooling (Hi/Me/Lo/Ulo)	44 / 39 / 31 / 22	46 / 41 / 33 / 22	44 / 39 / 31 / 22
		Heating (Hi/Me/Lo/Ulo)	46 / 41 / 33 / 23	46 / 42 / 34 / 23	46 / 41 / 33 / 23
	Outdoor	Cooling/Heating	48 / 50	48 / 50	49 / 52
Air flow	Indoor*3	Cooling (Hi/Me/Lo/Ulo)	14.3 / 12.4 / 7.8 / 5.4	16.3 / 13.4 / 8.9 / 5.4	14.3 / 12.4 / 7.8 / 5.4
		Heating (Hi/Me/Lo/Ulo)	17.3 / 14.3 / 9.8 / 6.2	17.8 / 13.7 / 10.9 / 6.2	17.3 / 14.3 / 9.8 / 6.2
	Outdoor	Cooling/Heating	100 / 100	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	305 x 920 x 220		
	Outdoor		1300 x 970 x 370		
Net weight	Indoor		13		
	Outdoor		105		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max.100		
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 43*2		
	Heating	°CWB	-20 to 20		
Air filter, Q'ty			Polypropylene net x 2(Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 & Interface kit:SC-BIKN2-E		

R32			Micro Inverter			
Set model name			SRK100VNAWZRF	SRK100VNAWZR	SRK100VSAWZRF	SRK100VSAWZR
Indoor unit			SRK100ZR-WF	SRK100ZR-W	SRK100ZR-WF	SRK100ZR-W
Outdoor unit			FDC100VNA-W	FDC100VNA-W	FDC100VSA-W	FDC100VSA-W
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz		3 Phase 380-415V, 50Hz / 380V, 60Hz	
Nominal cooling capacity (Min - Max)	kW		10.0 (4.0 - 11.2)	10.0 (4.0 - 11.2)	10.0 (4.0 - 11.2)	10.0 (4.0 - 11.2)
Nominal heating capacity (Min - Max)	kW		11.2 (4.0 - 12.5)	11.2 (4.0 - 12.5)	11.2 (4.0 - 12.5)	11.2 (4.0 - 12.5)
Power consumption	Cooling/Heating	kW	3.19 / 3.04	3.19 / 3.04	3.19 / 3.04	3.19 / 3.04
EER/COP	Cooling/Heating		3.13 / 3.68	3.13 / 3.68	3.13 / 3.68	3.13 / 3.68
Inrush current		A	5	5	5	5
Max. current			24	24	15	15
Sound power level*1	Indoor	Cooling/Heating	63 / 63	63 / 63	63 / 63	63 / 63
	Outdoor	Cooling/Heating	69 / 70	69 / 70	69 / 70	69 / 70
Sound pressure level*1	Indoor	Cooling (Hi/Me/Lo/Ulo)	48 / 45 / 40 / 27	48 / 45 / 40 / 27	48 / 45 / 40 / 27	48 / 45 / 40 / 27
		Heating (Hi/Me/Lo/Ulo)	48 / 43 / 38 / 30	48 / 43 / 38 / 30	48 / 43 / 38 / 30	48 / 43 / 38 / 30
	Outdoor	Cooling/Heating	54 / 55	54 / 55	54 / 55	54 / 55
Air flow	Indoor	Cooling (Hi/Me/Lo/Ulo)	24.5 / 21.3 / 17.6 / 10.4	24.5 / 21.3 / 17.6 / 10.4	24.5 / 21.3 / 17.6 / 10.4	24.5 / 21.3 / 17.6 / 10.4
		Heating (Hi/Me/Lo/Ulo)	27.5 / 23.2 / 19.1 / 13.6	27.5 / 23.2 / 19.1 / 13.6	27.5 / 23.2 / 19.1 / 13.6	27.5 / 23.2 / 19.1 / 13.6
	Outdoor	Cooling/Heating	75 / 73	75 / 73	75 / 73	75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	339 x 1197 x 262			
	Outdoor		845 x 970 x 370			
Net weight	Indoor		16.5			
	Outdoor		77		78	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m	Max.50			
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15			
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2			
	Heating	°CWB	-20 to 20			
Air filter, Q'ty			Polypropylene net x2 (Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 & Interface kit:SC-BIKN2-E			

NOTES:

The data are measured under the following conditions (R32 : ISO-T1, -H1 / R410A : ISO-T1).
 Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
 *1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 *2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.
 *3 : The values are for one indoor unit operation. (Multi system only)

The values are for simultaneous Multi operation.

R32		Micro Inverter				
Set model name		SRK100VNAWPZSX	SRK125VNAWPZSX	SRK140VNAWPZR	SRK140VNAWTZSX	
		Twin		Triple		
Indoor unit		SRK50ZSX-W x 2	SRK60ZSX-W x 2	SRK71ZR-W x 2	SRK50ZSX-W x 3	
Outdoor unit		FDC100VNA-W	FDC125VNA-W	FDC140VNA-W	FDC140VNA-W	
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz				
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)	
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)	
Power consumption	Cooling/Heating kW	2.89 / 2.61	4.54 / 3.58	4.26 / 4.03	4.26 / 3.74	
EER/COP	Cooling/Heating	3.46 / 4.29	2.76 / 3.91	3.19 / 3.85	3.19 / 4.14	
Inrush current	A	5	5	5	5	
Max. current		24	24	24	24	
Sound power level*1	Indoor ⁺³	Cooling/Heating	59 / 62	62 / 63	57 / 60	59 / 62
	Outdoor	Cooling/Heating	69 / 70	71 / 71	72 / 73	72 / 73
Sound pressure level*1	Indoor ⁺³	Cooling (Hi/Me/Lo/Ulo)	44 / 39 / 31 / 22	46 / 41 / 33 / 22	44 / 41 / 37 / 25	44 / 39 / 31 / 22
	Outdoor	Heating (Hi/Me/Lo/Ulo)	46 / 41 / 33 / 23	46 / 42 / 34 / 23	46 / 39 / 35 / 28	46 / 41 / 33 / 23
Air flow	Indoor ⁺³	Cooling/Heating	54 / 55	54 / 56	56 / 58	56 / 58
	Outdoor	Cooling (Hi/Me/Lo/Ulo)	14.3 / 12.4 / 7.8 / 5.4	16.3 / 13.4 / 8.9 / 5.4	20.5 / 18.6 / 16.2 / 10.4	14.3 / 12.4 / 7.8 / 5.4
Exterior dimensions	Indoor	HeightsxWidthxDepth	17.3 / 14.3 / 9.8 / 6.2	17.8 / 13.7 / 10.9 / 6.2	25.0 / 19.8 / 17.3 / 13.3	17.3 / 14.3 / 9.8 / 6.2
	Outdoor		75 / 73	75 / 73	75 / 73	75 / 73
Net weight	Indoor		305 x 920 x 220		339 x 1197 x 262	305 x 920 x 220
	Outdoor		13		15.5	13
Ref.piping size	Liquid/Gas		ømm		9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length			m		Max.50	
Vertical height differences	Outdoor is higher/lower		m		Max.50 / Max.15	
Outdoor operating temperature range	Cooling		°CDB		-15 to 50*2	
	Heating		°CWB		-20 to 20	
Air filter, Q'ty					Polypropylene net x 2(Washable)	
Remote control (option)					Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 & Interface kit:SC-BIKN2-E	

The values are for simultaneous Multi operation.

R32		Micro Inverter				
Set model name		SRK100VSAWPZSX	SRK125VSAWPZSX	SRK140VSAWPZR	SRK140VSAWTZSX	
		Twin		Triple		
Indoor unit		SRK50ZSX-W x 2	SRK60ZSX-W x 2	SRK71ZR-W x 2	SRK50ZSX-W x 3	
Outdoor unit		FDC100VSA-W	FDC125VSA-W	FDC140VSA-W	FDC140VSA-W	
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz				
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)	
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)	
Power consumption	Cooling/Heating kW	2.89 / 2.61	4.54 / 3.58	4.26 / 4.03	4.26 / 3.74	
EER/COP	Cooling/Heating	3.46 / 4.29	2.76 / 3.91	3.19 / 3.85	3.19 / 4.14	
Inrush current	A	5	5	5	5	
Max. current		15	15	15	15	
Sound power level*1	Indoor ⁺³	Cooling/Heating	59 / 62	62 / 63	57 / 60	59 / 62
	Outdoor	Cooling/Heating	69 / 70	71 / 71	72 / 73	72 / 73
Sound pressure level*1	Indoor ⁺³	Cooling (Hi/Me/Lo/Ulo)	44 / 39 / 31 / 22	46 / 41 / 33 / 22	44 / 41 / 37 / 25	44 / 39 / 31 / 22
	Outdoor	Heating (Hi/Me/Lo/Ulo)	46 / 41 / 33 / 23	46 / 42 / 34 / 23	46 / 39 / 35 / 28	46 / 41 / 33 / 23
Air flow	Indoor ⁺³	Cooling/Heating	54 / 55	54 / 56	56 / 58	56 / 58
	Outdoor	Cooling (Hi/Me/Lo/Ulo)	14.3 / 12.4 / 7.8 / 5.4	16.3 / 13.4 / 8.9 / 5.4	20.5 / 18.6 / 16.2 / 10.4	14.3 / 12.4 / 7.8 / 5.4
Exterior dimensions	Indoor	HeightsxWidthxDepth	17.3 / 14.3 / 9.8 / 6.2	17.8 / 13.7 / 10.9 / 6.2	25.0 / 19.8 / 17.3 / 13.3	17.3 / 14.3 / 9.8 / 6.2
	Outdoor		75 / 73	75 / 73	75 / 73	75 / 73
Net weight	Indoor		305 x 920 x 220		339 x 1197 x 262	305 x 920 x 220
	Outdoor		13		15.5	13
Ref.piping size	Liquid/Gas		ømm		9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length			m		Max.50	
Vertical height differences	Outdoor is higher/lower		m		Max.50 / Max.15	
Outdoor operating temperature range	Cooling		°CDB		-15 to 50*2	
	Heating		°CWB		-20 to 20	
Air filter, Q'ty					Polypropylene net x 2(Washable)	
Remote control (option)					Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 & Interface kit:SC-BIKN2-E	

SPECIFICATIONS - SRK -

The values are for simultaneous Multi operation.

R32			Micro Inverter		
Set model name			SRK200VSAWPZRF	SRK200VSAWPZR	
			Twin		
Indoor unit			SRK100ZR-WF x 2	SRK100ZR-W x 2	
Outdoor unit			FDC200VSA-W	FDC200VSA-W	
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW		20.0 (7.0 - 22.4)	20.0 (7.0 - 22.4)	
Nominal heating capacity (Min - Max)	kW		22.4 (6.6 - 25.0)	22.4 (6.6 - 25.0)	
Power consumption	Cooling/Heating	kW	7.46 / 6.87	7.46 / 6.87	
EER/COP	Cooling/Heating		2.68 / 3.26	2.68 / 3.26	
Inrush current		A	5	5	
Max. current			19	19	
Sound power level*1	Indoor	Cooling/Heating	63 / 63	63 / 63	
	Outdoor	Cooling/Heating	72 / 74	72 / 74	
Sound pressure level*1	Indoor	Cooling (Hi/Me/Lo/Ulo)	48 / 45 / 40 / 27	48 / 45 / 40 / 27	
	Outdoor	Heating (Hi/Me/Lo/Ulo)	48 / 43 / 38 / 30	48 / 43 / 38 / 30	
Air flow	Indoor	Cooling (Hi/Me/Lo/Ulo)	24.5 / 21.3 / 17.6 / 10.4	24.5 / 21.3 / 17.6 / 10.4	
	Outdoor	Heating (Hi/Me/Lo/Ulo)	27.5 / 23.2 / 19.1 / 13.6	27.5 / 23.2 / 19.1 / 13.6	
Exterior dimensions	Indoor	HeightxWidthxDepth	339 x 1197 x 262		
	Outdoor		1505 x 970 x 370		
Net weight	Indoor		16.5		
	Outdoor		144		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 22.22(7/8")		
Refrigerant line (one way) length		m	Max.70		
Vertical height differences	Outdoor is higher/lower	m	Max.50 ⁴ / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50 ²		
	Heating	°CWB	-20 to 20		
Air filter, Q'ty			Polypropylene net x2 (Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 & Interface kit:SC-BIKN2-E		

The values are for simultaneous Multi operation.

R410A			Micro Inverter		
Set model name			SRK100VNAZR	SRK100VSAZR	SRK200VSAAPZR
			Twin		
Indoor unit			SRK100ZR-W	SRK100ZR-W	SRK100ZR-W x 2
Outdoor unit			FDC100VNA	FDC100VSA	FDC200VSA
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz	3 Phase 380-415V, 50Hz / 380V, 60Hz	
Nominal cooling capacity (Min - Max)	kW		10.0 (4.0 - 11.2)	10.0 (4.0 - 11.2)	19.0 (5.2 - 22.4)
Nominal heating capacity (Min - Max)	kW		11.2 (4.0 - 12.5)	11.2 (4.0 - 12.5)	22.4 (3.3 - 25.0)
Power consumption	Cooling/Heating	kW	3.19 / 2.78	3.19 / 2.78	7.52 / 7.41
EER/COP	Cooling/Heating		3.13 / 4.03	3.13 / 4.03	2.53 / 3.02
Inrush current		A	5	5	5
Max. current			24	15	20
Sound power level*1	Indoor*3	Cooling/Heating	63 / 63	63 / 63	63 / 63
	Outdoor	Cooling/Heating	70 / 70	70 / 70	72 / 74
Sound pressure level*1	Indoor*3	Cooling (Hi/Me/Lo/Ulo)	48 / 45 / 40 / 27	48 / 45 / 40 / 27	48 / 45 / 40 / 27
	Outdoor	Heating (Hi/Me/Lo/Ulo)	48 / 43 / 38 / 30	48 / 43 / 38 / 30	48 / 43 / 38 / 30
Air flow	Indoor*3	Cooling (Hi/Me/Lo/Ulo)	24.5 / 21.3 / 17.6 / 10.4	24.5 / 21.3 / 17.6 / 10.4	24.5 / 21.3 / 17.6 / 10.4
	Outdoor	Heating (Hi/Me/Lo/Ulo)	27.5 / 23.2 / 19.1 / 13.6	27.5 / 23.2 / 19.1 / 13.6	27.5 / 23.2 / 19.1 / 13.6
Exterior dimensions	Indoor	HeightxWidthxDepth	339 x 1197 x 262		
	Outdoor		845 x 970 x 370		1300 x 970 x 370
Net weight	Indoor		16.5		
	Outdoor		80	82	115
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max.50		
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50 ²		
	Heating	°CWB	-20 to 20		
Air filter, Q'ty			Polypropylene net x2 (Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 & Interface kit:SC-BIKN2-E		

NOTES:

The data are measured under the following conditions (R32 : ISO-T1, -H1 / R410A : ISO-T1).

Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.


*3 : The values are for one indoor unit operation. (Multi system only)

*4 : In case of following conditions:Max.50m(Outdoor unit is higher & Outdoor temperature ≤ 43°C), Max.30m(Outdoor unit is higher & Outdoor temperature > 43°C)

R32		Standard Inverter			
Set model name		SRK71VNPWZRF	SRK71VNPWZR	SRK100VNPWZRF	SRK100VNPWZR
Indoor unit		SRK71ZR-WF	SRK71ZR-W	SRK100ZR-WF	SRK100ZR-W
Outdoor unit		FDC71VNP-W	FDC71VNP-W	FDC100VNP-W	FDC100VNP-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)		kW 7.1 (1.5 - 7.3)	7.1 (1.5 - 7.3)	9.6 (2.1 - 9.6)	9.6 (2.1 - 9.6)
Nominal heating capacity (Min - Max)		kW 7.1 (1.1 - 7.3)	7.1 (1.1 - 7.3)	10.0 (1.7 - 10.4)	10.0 (1.7 - 10.4)
Power consumption	Cooling/Heating	kW 2.36 / 1.88	2.36 / 1.88	3.10 / 2.80	3.10 / 2.80
EER/COP	Cooling/Heating	3.01 / 3.78	3.01 / 3.78	3.10 / 3.57	3.10 / 3.57
Inrush current		A 5	5	5	5
Max. current		15.8	15.8	19	19
Sound power level*1	Indoor*3	Cooling/Heating	57 / 60	57 / 60	63 / 63
	Outdoor	Cooling/Heating	67 / 67	67 / 67	68 / 67
Sound pressure level*1	Indoor*3	Cooling (Hi/Me/Lo/Ulo)	44 / 41 / 37 / 25	44 / 41 / 37 / 25	48 / 45 / 40 / 27
	Outdoor	Heating (Hi/Me/Lo/Ulo)	46 / 39 / 35 / 28	46 / 39 / 35 / 28	48 / 43 / 38 / 30
Air flow	Indoor*3	Cooling (Hi/Me/Lo/Ulo)	20.5 / 18.6 / 16.2 / 10.4	20.5 / 18.6 / 16.2 / 10.4	24.5 / 21.3 / 17.6 / 10.4
	Outdoor	Heating (Hi/Me/Lo/Ulo)	25.0 / 19.8 / 17.3 / 13.3	25.0 / 19.8 / 17.3 / 13.3	27.5 / 23.2 / 19.1 / 13.6
Exterior dimensions	Indoor	HeightxWidthxDepth	mm 339 x 1197 x 262		
	Outdoor		640 x 800(+71) x 290	750 x 880(+88) x 340	
Net weight	Indoor		kg 15.5		
	Outdoor		45		
Ref.piping size	Liquid/Gas	ømm	6.35(1/4") / 12.7(1/2")		
Refrigerant line (one way) length		m	Max.30		
Vertical height differences	Outdoor is higher/lower	m	Max.20 / Max.20		
Outdoor operating temperature range	Cooling	°CDB	-15 to 46*2		
	Heating	°CWB	-15 to 20		
Air filter, Q'ty			Polypropylene net x2 (Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 & Interface kit:SC-BIKN2-E		

FDE

Indoor Unit Ceiling Suspended

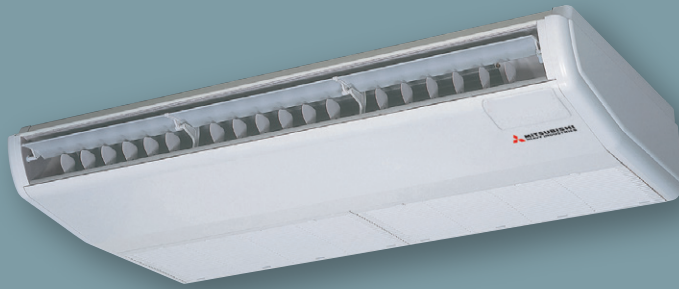

FDE 40/50/60/71/100/125/140



- Energy Saving
- Home Leave
- Hi Power
- Silent Operation
- Flap Control
- Favourite Setting




Remote control (Option)



*Not all functions available with all remote control options.

High Efficiency

Energy efficiency was improved by use of DC fan motor & high efficient heat exchanger.

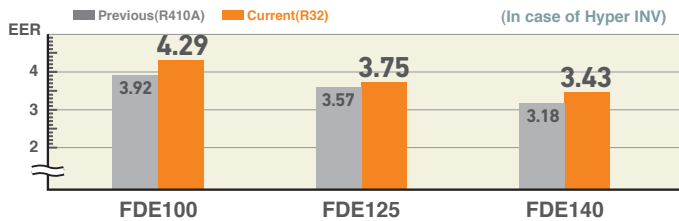


Lighter than ever

By decreasing the numbers of fan motors from two to one, we reduced the overall weight of our FDE units.


	Previous (VF)	Current (VH)	
60-71VH	37	33	4kg less!!
100-125-140VH	49	43	6kg less!!

Reduced Noise

The industry's lowest sound pressure levels were achieved by decreasing air flow volume, decreasing pressure loss with employment of one fan motor and optimizing casing and distributor shape.

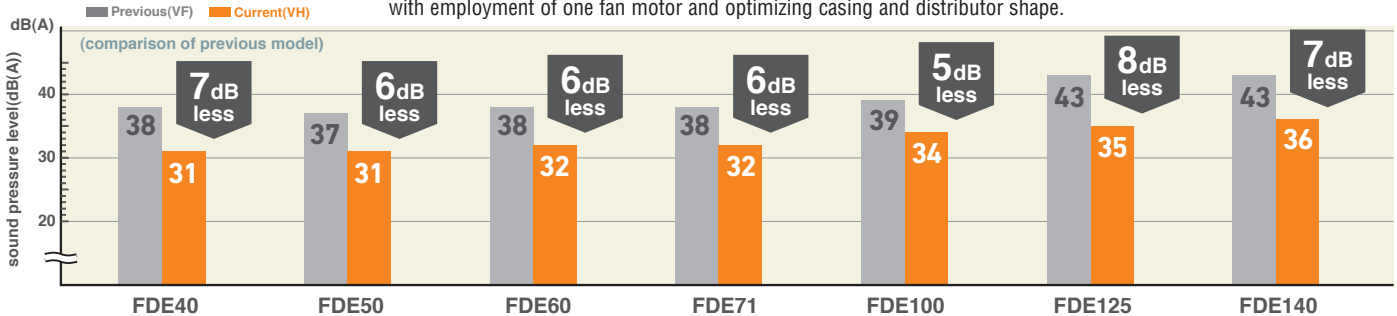

Flap Control System




The flap can swing within the range of upper and lower flap position selected.

* The wireless remote control is not applicable to the flap control system.

Motion Sensor (Option)

Motion sensor is equipped in the panel and detects the presence/absence and activity of humans in a room to improve the comfort and energy saving performance of the unit.

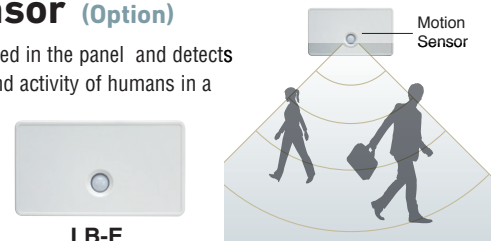

Improved Installation Workability

The refrigerant pipe from the unit can be arranged in three directions, rear, right and up. The drain pipe can be arranged in two directions, left and right. This will allow a free layout of piping for various installation conditions. The unit can only be serviced from the bottom.

Increased freedom of a piping layout



OUTDOOR UNIT

		Hyper Inverter		
SRC · FDC		40ZSX-W1,50-60ZSX-W3	71VNX-W	100-140VN(S)X-W
		-	-	100-140VN(S)X
model				
Chargeless		15m	30m	
Height x Width x Depth (mm)		640 x 800(+71) x 290	750 x 880(+88) x 340	1300 x 970 x 370


		Micro Inverter			Standard Inverter		
FDC		100-140VN(S)A-W	-	200·250·280VSA-W	71VNP-W	90-100VNP-W	125VNP-W
		100-140VN(S)A	200VSA	250VSA	-	-	-
model							
Chargeless		30m			15m		
Height x Width x Depth (mm)		845 x 970 x 370	1300 x 970 x 370	1505 x 970 x 370	640 x 800(+71) x 290	750 x 880(+88) x 340	845 x 970 x 370

DIMENSIONS (Unit:mm) - FDE -

Models FDE40VH, 50VH

Note (1) The model name label is attached on the fan casing inside the air return grille.


Symbol	Content
A	Gas piping $\phi 12.7 (1/2")$ (Flare)
B	Liquid piping $\phi 6.35 (1/4")$ (Flare)
C _{1,2}	Drain piping VP20 (I.D.20, O.D.26)
D	Hole for suspension bolts (M10 or M8)
E	Back cutout PE cover
F	Top cutout Plate cover
G	Drain piping (for left back) (Knock out)

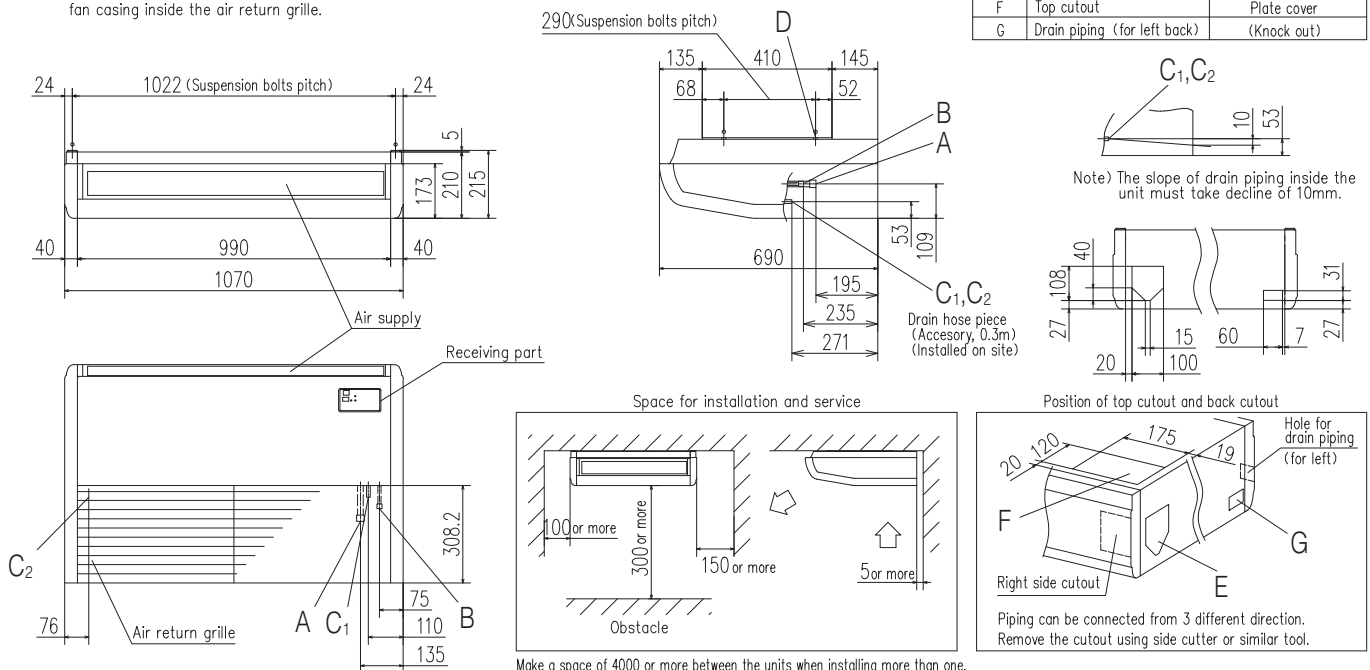

DIMENSIONS (Unit:mm) - FDE -


Models FDE60VH, 71VH

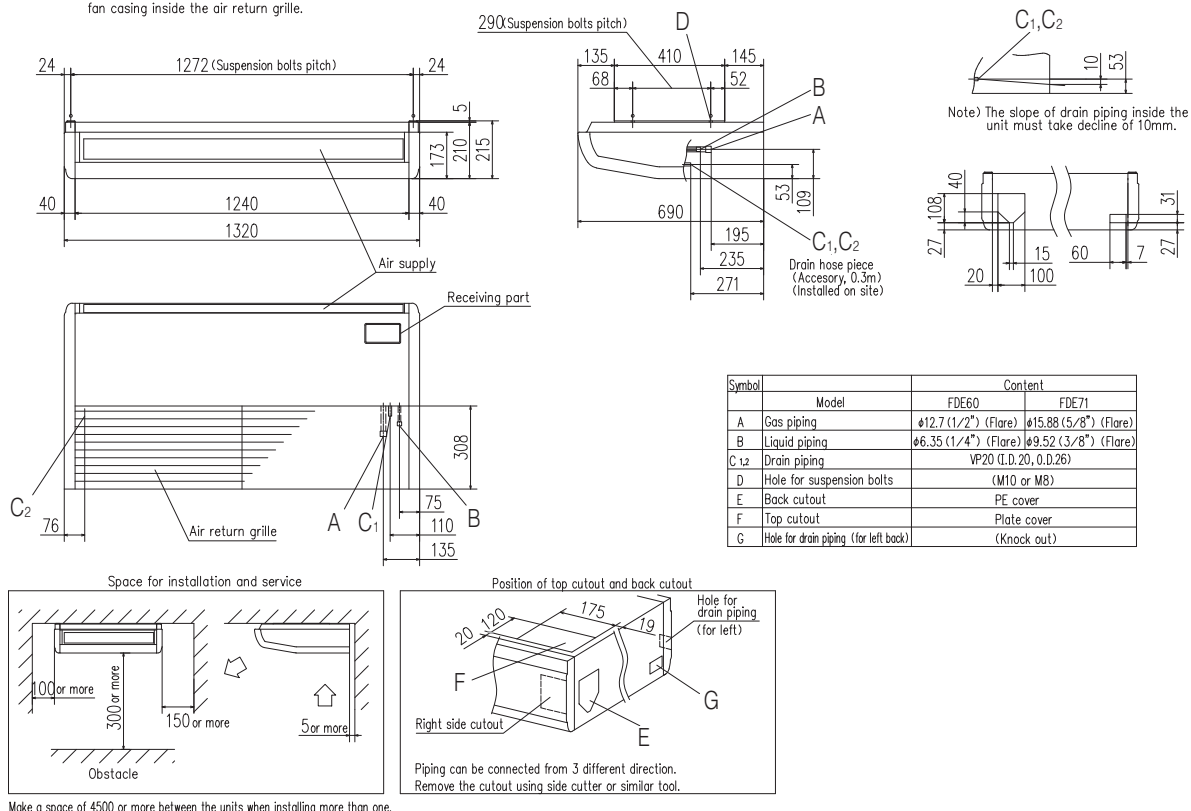

Note (1) The model name label is attached on the fan casing inside the air return grille.



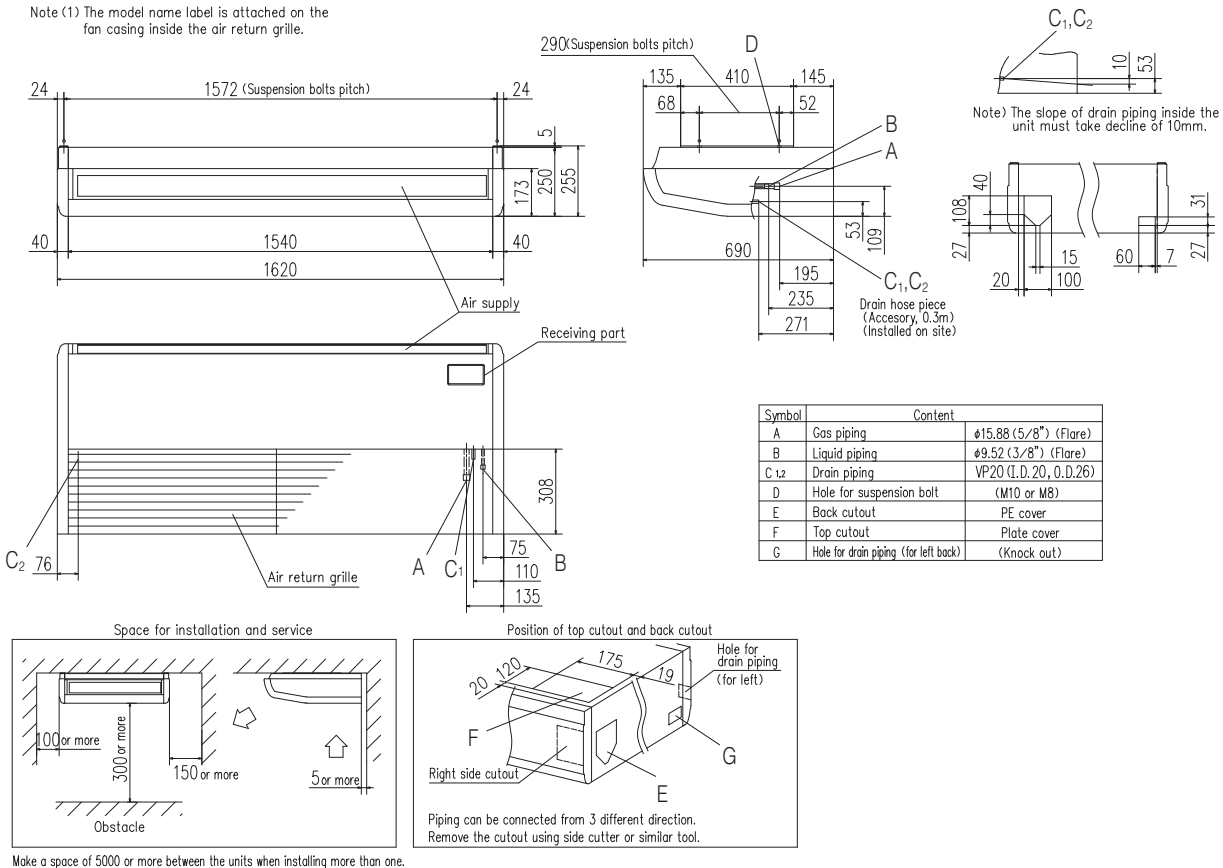

Models FDE100VH, 125VH, 140VH

Note (1) The model name label is attached on the fan casing inside the air return grille.



				
Set model name		FDE40ZSXW1VH	FDE50ZSXW3VH	FDE60ZSXW3VH
Indoor unit		FDE40VH	FDE50VH	FDE60VH
Outdoor unit		SRC40ZSX-W1	SRC50ZSX-W3	SRC60ZSX-W3
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)		kW 4.0 (1.1 - 4.7)	5.0 (1.1 - 5.6)	5.6 (1.1 - 6.3)
Nominal heating capacity (Min - Max)		kW 4.5 (0.6 - 5.4)	5.4 (0.6 - 6.3)	6.7 (0.6 - 7.1)
Power consumption		Cooling/Heating kW 1.02 / 1.10	1.43 / 1.46	1.51 / 1.86
EER/COP		Cooling/Heating 3.92 / 4.09	3.49 / 3.70	3.71 / 3.60
Inrush current		A 5	5	5
Max. current		15	15	15
Sound power level*1	Indoor	Cooling/Heating 60 / 60	60 / 60	60 / 60
	Outdoor	Cooling/Heating 63 / 62	63 / 62	65 / 65
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo) dB(A) 46 / 38 / 36 / 31	46 / 38 / 36 / 31	47 / 41 / 37 / 32
		Heating (P-Hi/Hi/Me/Lo) 46 / 38 / 36 / 31	46 / 38 / 36 / 31	47 / 41 / 37 / 32
	Outdoor	Cooling/Heating 52 / 50	52 / 50	53 / 54
		Air flow	Indoor Cooling (P-Hi/Hi/Me/Lo) m³/min 13 / 10 / 9 / 7	13 / 10 / 9 / 7
	Indoor Heating (P-Hi/Hi/Me/Lo) 13 / 10 / 9 / 7	13 / 10 / 9 / 7	20 / 16 / 13 / 10	
	Outdoor Cooling/Heating 33 / 33	39 / 33	41.5 / 39	
Exterior dimensions	Indoor	HeightxWidthxDepth mm 210 x 1070 x 690	210 x 1320 x 690	
	Outdoor	640 x 800(+71) x 290		
Net weight	Indoor	kg 28	33	
	Outdoor	45		
Ref.piping size	Liquid/Gas	ømm 6.35(1/4") / 12.7(1/2")		
Refrigerant line (one way) length	m	Max.30		
Vertical height differences	Outdoor is higher/lower	m Max.20 / Max.20		
Outdoor operating temperature range	Cooling	°CDB -15 to 46*2		
	Heating	°CWB -20 to 20		
Air filter, Q'ty	Pocket Plastic net x2(Washable)			
Remote control (option)	Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3			

					
Set model name		FDE71VNXWVH	FDE100VNXWVH	FDE125VNXWVH	FDE140VNXWVH
Indoor unit		FDE71VH	FDE100VH	FDE125VH	FDE140VH
Outdoor unit		FDC71VNX-W	FDC100VNX-W	FDC125VNX-W	FDC140VNX-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)		kW 7.1 (3.2 - 8.0)	10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)		kW 8.0 (3.6 - 9.0)	11.2 (2.7 - 12.5)	14.0 (2.7 - 17.0)	16.0 (2.7 - 18.0)
Power consumption		Cooling/Heating kW 1.87 / 1.87	2.33 / 2.52	3.34 / 3.74	4.08 / 4.41
EER/COP		Cooling/Heating 3.80 / 4.28	4.29 / 4.45	3.75 / 3.74	3.43 / 3.63
Inrush current		A 5	5	5	5
Max. current		19.1	25	27	27
Sound power level*1	Indoor	Cooling/Heating 60 / 60	64 / 64	64 / 64	65 / 65
	Outdoor	Cooling/Heating 66 / 66	67 / 67	68 / 70	69 / 71
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo) dB(A) 47 / 41 / 37 / 32	48 / 43 / 38 / 34	48 / 45 / 40 / 35	49 / 45 / 40 / 36
		Heating (P-Hi/Hi/Me/Lo) 47 / 41 / 37 / 32	48 / 43 / 38 / 34	48 / 45 / 40 / 35	49 / 45 / 40 / 36
	Outdoor	Cooling/Heating 51 / 51	53 / 51	53 / 54	54 / 54
		Air flow	Indoor Cooling (P-Hi/Hi/Me/Lo) m³/min 20 / 16 / 13 / 10	32 / 26 / 21 / 16.5	32 / 29 / 23 / 17
	Indoor Heating (P-Hi/Hi/Me/Lo) 20 / 16 / 13 / 10	32 / 26 / 21 / 16.5	32 / 29 / 23 / 17	34 / 29 / 23 / 18	
	Outdoor Cooling/Heating 60 / 50	100 / 100	100 / 100	100 / 100	
Exterior dimensions	Indoor	HeightxWidthxDepth mm 210 x 1320 x 690	250 x 1620 x 690		
	Outdoor	750 x 880(+88) x 340	1300 x 970 x 370		
Net weight	Indoor	kg 33	43		
	Outdoor	60	97		
Ref.piping size	Liquid/Gas	ømm 9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length	m	Max.50	Max.100		
Vertical height differences	Outdoor is higher/lower	m Max.30 / Max.15	Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB -15 to 50*2			
	Heating	°CWB -20 to 20			
Air filter, Q'ty	Pocket Plastic net x2(Washable)				
Remote control (option)	Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3				

NOTES:

The data are measured under the following conditions(ISO-T1, -H1).
 Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
 *1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 *2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

SPECIFICATIONS - FDE -

R32		Hyper Inverter		
Set model name		FDE100VSXWVH	FDE125VSXWVH	FDE140VSXWVH
Indoor unit		FDE100VH	FDE125VH	FDE140VH
Outdoor unit		FDC100VSX-W	FDC125VSX-W	FDC140VSX-W
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)		10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)		11.2 (2.7 - 16.0)	14.0 (2.7 - 18.0)	16.0 (2.7 - 20.0)
Power consumption		2.33 / 2.52	3.34 / 3.74	4.08 / 4.41
EER/COP		4.29 / 4.45	3.75 / 3.74	3.43 / 3.63
Inrush current		5	5	5
Max. current		14	14	14
Sound power level* ¹	Indoor	64 / 64	64 / 64	65 / 65
	Outdoor	67 / 67	68 / 70	69 / 71
Sound pressure level* ¹	Indoor	Cooling (P-Hi/Hi/Me/Lo)	48 / 43 / 38 / 34	48 / 45 / 40 / 35
		Heating (P-Hi/Hi/Me/Lo)	48 / 43 / 38 / 34	48 / 45 / 40 / 35
	Outdoor	Cooling/Heating	53 / 51	53 / 54
		Cooling/Heating	53 / 51	53 / 54
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	32 / 26 / 21 / 16.5	32 / 29 / 23 / 17
		Heating (P-Hi/Hi/Me/Lo)	32 / 26 / 21 / 16.5	32 / 29 / 23 / 17
	Outdoor	Cooling/Heating	100 / 100	100 / 100
Exterior dimensions	Indoor	250 x 1620 x 690		
	Outdoor	1300 x 970 x 370		
Net weight	Indoor	43		
	Outdoor	99		
Ref.piping size	Liquid/Gas	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m Max.100		
Vertical height differences		Outdoor is higher/lower m Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB -15 to 50* ²		
	Heating	°CWB -20 to 20		
Air filter, Q'ty		Pocket Plastic net x2(Washable)		
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3		

The values are for simultaneous Multi operation.

R32		Hyper Inverter				
Set model name		FDE71VNXWPVH	FDE100VNXWPVH	FDE125VNXWPVH	FDE140VNXWPVH	FDE140VNXWTVH
Indoor unit		FDE40VH x 2	FDE50VH x 2	FDE60VH x 2	FDE71VH x 2	FDE50VH x 3
Outdoor unit		FDC71VNX-W	FDC100VNX-W	FDC125VNX-W	FDC140VNX-W	FDC140VNX-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz				
Nominal cooling capacity (Min - Max)		7.1 (3.2 - 8.0)	10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)	14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)		8.0 (3.6 - 9.0)	11.2 (2.7 - 12.5)	14.0 (2.7 - 17.0)	16.0 (2.7 - 18.0)	16.0 (2.7 - 18.0)
Power consumption		1.76 / 2.10	2.48 / 2.88	3.49 / 3.27	4.16 / 3.97	3.72 / 4.11
EER/COP		4.03 / 3.81	4.04 / 3.89	3.58 / 4.29	3.36 / 4.03	3.76 / 3.89
Inrush current		5	5	5	5	5
Max. current		19.1	25	27	27	27
Sound power level* ¹	Indoor* ³	60 / 60	60 / 60	60 / 60	60 / 60	60 / 60
	Outdoor	66 / 66	67 / 67	68 / 70	69 / 71	69 / 71
Sound pressure level* ¹	Indoor* ³	Cooling (P-Hi/Hi/Me/Lo)	46 / 38 / 36 / 31	46 / 38 / 36 / 31	47 / 41 / 37 / 32	47 / 41 / 37 / 32
		Heating (P-Hi/Hi/Me/Lo)	46 / 38 / 36 / 31	46 / 38 / 36 / 31	47 / 41 / 37 / 32	47 / 41 / 37 / 32
	Outdoor	Cooling/Heating	51 / 51	53 / 51	53 / 54	54 / 54
		Cooling/Heating	51 / 51	53 / 51	53 / 54	54 / 54
Air flow	Indoor* ³	Cooling (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 7	13 / 10 / 9 / 7	20 / 16 / 13 / 10	20 / 16 / 13 / 10
		Heating (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 7	13 / 10 / 9 / 7	20 / 16 / 13 / 10	20 / 16 / 13 / 10
	Outdoor	Cooling/Heating	60 / 50	100 / 100	100 / 100	100 / 100
Exterior dimensions	Indoor	210 x 1070 x 690		210 x 1320 x 690		
	Outdoor	750 x 880(+88) x 340		1300 x 970 x 370		
Net weight	Indoor	28		33		
	Outdoor	60		97		
Ref.piping size	Liquid/Gas	9.52(3/8") / 15.88(5/8")				
Refrigerant line (one way) length		Max. 50	Max. 100	Max. 100	Max. 85	
Vertical height differences		Outdoor is higher/lower m	Max.30 / Max.15	Max.50 / Max.15	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB -15 to 50* ²				
	Heating	°CWB -20 to 20				
Air filter, Q'ty		Pocket plastic net x 2(Washable)				
Remote control (option)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3				

NOTES:

The data are measured under the following conditions(R32 : ISO-T1, -H1).

Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

*3 : The values are for one indoor unit operation. (Multi system only)

The values are for simultaneous Multi operation.

R32			Hyper Inverter			
Set model name			FDE100VSXWPVH	FDE125VSXWPVH	FDE140VSXWPVH	FDE140VSXWTVH
			Twin		Triple	
Indoor unit			FDE50VH x 2	FDE60VH x 2	FDE71VH x 2	FDE50VH x 3
Outdoor unit			FDC100VSX-W	FDC125VSX-W	FDC140VSX-W	FDC140VSX-W
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)		kW	10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)	14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)		kW	11.2 (2.7 - 16.0)	14.0 (2.7 - 18.0)	16.0 (2.7 - 20.0)	16.0 (2.7 - 20.0)
Power consumption	Cooling/Heating	kW	2.48 / 2.88	3.49 / 3.27	4.16 / 3.97	3.72 / 4.11
EER/COP	Cooling/Heating		4.04 / 3.89	3.58 / 4.29	3.36 / 4.03	3.76 / 3.89
Inrush current		A	5	5	5	5
Max. current			14	14	14	14
Sound power level*1	Indoor*3	Cooling/Heating	60 / 60	60 / 60	60 / 60	60 / 60
	Outdoor	Cooling/Heating	67 / 67	68 / 70	69 / 71	69 / 71
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	46 / 38 / 36 / 31	47 / 41 / 37 / 32	47 / 41 / 37 / 32	46 / 38 / 36 / 31
	Outdoor	Cooling/Heating	53 / 51	53 / 54	54 / 54	54 / 54
Air flow	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 7	20 / 16 / 13 / 10	20 / 16 / 13 / 10	13 / 10 / 9 / 7
	Outdoor	Cooling/Heating	100 / 100	100 / 100	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	210 x 1070 x 690	210 x 1320 x 690		210 x 1070 x 690
	Outdoor			1300 x 970 x 370		
Net weight	Indoor		28	33		28
	Outdoor			99		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m	Max.100		Max.85	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15			
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2			
	Heating	°CWB	-20 to 20			
Air filter, Q'ty			Pocket plastic net x 2(Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3			

SPECIFICATIONS - FDE -

R410A		Hyper Inverter		
Set model name		FDE100VNXVH	FDE125VNXVH	FDE140VNXVH
Indoor unit		FDE100VH	FDE125VH	FDE140VH
Outdoor unit		FDC100VNX	FDC125VNX	FDC140VNX
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)		kW 10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)		kW 11.2 (4.0 - 12.5)	14.0 (4.0 - 17.0)	16.0 (4.0 - 18.0)
Power consumption		Cooling/Heating kW 2.55 / 2.68	3.50 / 3.77	4.40 / 4.69
EER/COP		Cooling/Heating 3.92 / 4.18	3.57 / 3.71	3.18 / 3.41
Inrush current		A 5	5	5
Max. current		A 24	26	26
Sound power level*1	Indoor	Cooling/Heating	64 / 64	64 / 64
	Outdoor	Cooling/Heating	70 / 70	72 / 72
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	48 / 43 / 38 / 34	48 / 45 / 40 / 35
		Heating (P-Hi/Hi/Me/Lo)	48 / 43 / 38 / 34	48 / 45 / 40 / 35
	Outdoor	Cooling/Heating	48 / 50	48 / 50
		Cooling/Heating	48 / 50	48 / 50
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	32 / 26 / 21 / 16.5	32 / 29 / 23 / 17
		Heating (P-Hi/Hi/Me/Lo)	32 / 26 / 21 / 16.5	32 / 29 / 23 / 17
	Outdoor	Cooling/Heating	100 / 100	100 / 100
		Cooling/Heating	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	250 x 1620 x 690	
	Outdoor	HeightxWidthxDepth	1300 x 970 x 370	
Net weight	Indoor		43	
	Outdoor		105	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.100	
Vertical height differences		Outdoor is higher/lower	m Max.30 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 43*2	
	Heating	°CWB	-20 to 20	
Air filter, Q'ty			Pocket Plastic net x2(Washable)	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3	

R410A		Hyper Inverter		
Set model name		FDE100VSXVH	FDE125VSXVH	FDE140VSXVH
Indoor unit		FDE100VH	FDE125VH	FDE140VH
Outdoor unit		FDC100VSX	FDC125VSX	FDC140VSX
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)		kW 10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)		kW 11.2 (4.0 - 16.0)	14.0 (4.0 - 18.0)	16.0 (4.0 - 20.0)
Power consumption		Cooling/Heating kW 2.55 / 2.68	3.50 / 3.77	4.40 / 4.69
EER/COP		Cooling/Heating 3.92 / 4.18	3.57 / 3.71	3.18 / 3.41
Inrush current		A 5	5	5
Max. current		A 15	15	15
Sound power level*1	Indoor	Cooling/Heating	64 / 64	64 / 64
	Outdoor	Cooling/Heating	70 / 70	72 / 72
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	48 / 43 / 38 / 34	48 / 45 / 40 / 35
		Heating (P-Hi/Hi/Me/Lo)	48 / 43 / 38 / 34	48 / 45 / 40 / 35
	Outdoor	Cooling/Heating	48 / 50	48 / 50
		Cooling/Heating	48 / 50	48 / 50
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	32 / 26 / 21 / 16.5	32 / 29 / 23 / 17
		Heating (P-Hi/Hi/Me/Lo)	32 / 26 / 21 / 16.5	32 / 29 / 23 / 17
	Outdoor	Cooling/Heating	100 / 100	100 / 100
		Cooling/Heating	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	250 x 1620 x 690	
	Outdoor	HeightxWidthxDepth	1300 x 970 x 370	
Net weight	Indoor		43	
	Outdoor		105	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.100	
Vertical height differences		Outdoor is higher/lower	m Max.30 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 43*2	
	Heating	°CWB	-20 to 20	
Air filter, Q'ty			Pocket Plastic net x2(Washable)	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3	

NOTES:

The data are measured under the following conditions(ISO-T1).

Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

*3 : The values are for one indoor unit operation. (Multi system only)

The values are for simultaneous Multi operation.

R410A		Hyper Inverter			
Set model name		FDE100VNXPVH	FDE125VNXPVH	FDE140VNXPVH	FDE140VNXTVH
		Twin		Triple	
Indoor unit		FDE50VH x 2	FDE60VH x 2	FDE71VH x 2	FDE50VH x 3
Outdoor unit		FDC100VNX	FDC125VNX	FDC140VNX	FDC140VNX
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 17.0)	16.0 (4.0 - 18.0)	16.0 (4.0 - 18.0)
Power consumption	Cooling/Heating kW	3.00 / 3.39	3.97 / 3.70	4.67 / 4.58	4.66 / 4.53
EER/COP	Cooling/Heating	3.33 / 3.30	3.15 / 3.78	3.00 / 3.49	3.00 / 3.53
Inrush current		5	5	5	5
Max. current		24	26	26	26
Sound power level*1	Indoor*3 Outdoor	Cooling/Heating Cooling/Heating	60 / 60 70 / 70	60 / 60 70 / 70	60 / 60 72 / 72
Sound pressure level*1	Indoor*3 Outdoor	Cooling (P-Hi/Hi/Me/Lo) Heating (P-Hi/Hi/Me/Lo) Cooling/Heating	46 / 38 / 36 / 31 46 / 38 / 36 / 31 48 / 50	47 / 41 / 37 / 32 47 / 41 / 37 / 32 48 / 50	47 / 41 / 37 / 32 47 / 41 / 37 / 32 49 / 52
Air flow	Indoor*3 Outdoor	Cooling (P-Hi/Hi/Me/Lo) Heating (P-Hi/Hi/Me/Lo) Cooling/Heating	13 / 10 / 9 / 7 13 / 10 / 9 / 7 100 / 100	20 / 16 / 13 / 10 20 / 16 / 13 / 10 100 / 100	20 / 16 / 13 / 10 20 / 16 / 13 / 10 100 / 100
Exterior dimensions	Indoor Outdoor	HeightxWidthxDepth	mm	210 x 1070 x 690 210 x 1320 x 690 1300 x 970 x 370	210 x 1070 x 690
Net weight	Indoor Outdoor		kg	28 33 105	28
Ref.piping size	Liquid/Gas		ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length			m	Max. 100	
Vertical height differences	Outdoor is higher/lower		m	Max.30 / Max.15	
Outdoor operating temperature range	Cooling Heating	°CDB °CWB		-15 to 43*2 -20 to 20	
Air filter, Q'ty				Pocket plastic net x 2(Washable)	
Remote control (option)				Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3	

The values are for simultaneous Multi operation.

R410A		Hyper Inverter			
Set model name		FDE100VXSXPVH	FDE125VXSXPVH	FDE140VXSXPVH	FDE140VXSXTVH
		Twin		Triple	
Indoor unit		FDE50VH x 2	FDE60VH x 2	FDE71VH x 2	FDE50VH x 3
Outdoor unit		FDC100VSX	FDC125VSX	FDC140VSX	FDC140VSX
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 16.0)	14.0 (4.0 - 18.0)	16.0 (4.0 - 20.0)	16.0 (4.0 - 20.0)
Power consumption	Cooling/Heating kW	3.00 / 3.39	3.97 / 3.70	4.67 / 4.58	4.66 / 4.53
EER/COP	Cooling/Heating	3.33 / 3.30	3.15 / 3.78	3.00 / 3.49	3.00 / 3.53
Inrush current		5	5	5	5
Max. current		15	15	15	15
Sound power level*1	Indoor*3 Outdoor	Cooling/Heating Cooling/Heating	60 / 60 70 / 70	60 / 60 70 / 70	60 / 60 72 / 72
Sound pressure level*1	Indoor*3 Outdoor	Cooling (P-Hi/Hi/Me/Lo) Heating (P-Hi/Hi/Me/Lo) Cooling/Heating	46 / 38 / 36 / 31 46 / 38 / 36 / 31 48 / 50	47 / 41 / 37 / 32 47 / 41 / 37 / 32 48 / 50	47 / 41 / 37 / 32 47 / 41 / 37 / 32 49 / 52
Air flow	Indoor*3 Outdoor	Cooling (P-Hi/Hi/Me/Lo) Heating (P-Hi/Hi/Me/Lo) Cooling/Heating	13 / 10 / 9 / 7 13 / 10 / 9 / 7 100 / 100	20 / 16 / 13 / 10 20 / 16 / 13 / 10 100 / 100	20 / 16 / 13 / 10 20 / 16 / 13 / 10 100 / 100
Exterior dimensions	Indoor Outdoor	HeightxWidthxDepth	mm	210 x 1070 x 690 210 x 1320 x 690 1300 x 970 x 370	210 x 1070 x 690
Net weight	Indoor Outdoor		kg	28 33 105	28
Ref.piping size	Liquid/Gas		ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length			m	Max.100	
Vertical height differences	Outdoor is higher/lower		m	Max.30 / Max.15	
Outdoor operating temperature range	Cooling Heating	°CDB °CWB		-15 to 43*2 -20 to 20	
Air filter, Q'ty				Pocket plastic net x 2(Washable)	
Remote control (option)				Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3	

SPECIFICATIONS - FDE -

R32		Micro Inverter		
Set model name		FDE100VNAVWH	FDE125VNAVWH	FDE140VNAVWH
Indoor unit		FDE100VH	FDE125VH	FDE140VH
Outdoor unit		FDC100VNA-W	FDC125VNA-W	FDC140VNA-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	2.85 / 2.54	4.45 / 3.74	5.05 / 4.18
EER/COP	Cooling/Heating	3.51 / 4.41	2.81 / 3.74	2.69 / 3.71
Inrush current		5	5	5
Max. current		24	24	24
Sound power level*1	Indoor	Cooling/Heating	64 / 64	65 / 65
	Outdoor	Cooling/Heating	69 / 70	72 / 73
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	48 / 43 / 38 / 34	49 / 45 / 40 / 36
		Heating (P-Hi/Hi/Me/Lo)	48 / 43 / 38 / 34	49 / 45 / 40 / 36
	Outdoor	Cooling/Heating	54 / 55	56 / 58
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	32 / 26 / 21 / 16.5	34 / 29 / 23 / 18
		Heating (P-Hi/Hi/Me/Lo)	32 / 26 / 21 / 16.5	34 / 29 / 23 / 18
	Outdoor	Cooling/Heating	75 / 73	75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	250 x 1620 x 690	
	Outdoor		845 x 970 x 370	
Net weight	Indoor		43	
	Outdoor		77	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.50	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2	
	Heating	°CWB	-20 to 20	
Air filter, Q'ty			Pocket Plastic net x2(Washable)	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3	

R32		Micro Inverter		
Set model name		FDE100VSAVWH	FDE125VSAVWH	FDE140VSAVWH
Indoor unit		FDE100VH	FDE125VH	FDE140VH
Outdoor unit		FDC100VSA-W	FDC125VSA-W	FDC140VSA-W
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	2.85 / 2.54	4.45 / 3.74	5.05 / 4.18
EER/COP	Cooling/Heating	3.51 / 4.41	2.81 / 3.74	2.69 / 3.71
Inrush current		5	5	5
Max. current		15	15	15
Sound power level*1	Indoor	Cooling/Heating	64 / 64	65 / 65
	Outdoor	Cooling/Heating	69 / 70	72 / 73
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	48 / 43 / 38 / 34	49 / 45 / 40 / 36
		Heating (P-Hi/Hi/Me/Lo)	48 / 43 / 38 / 34	49 / 45 / 40 / 36
	Outdoor	Cooling/Heating	54 / 55	56 / 58
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	32 / 26 / 21 / 16.5	34 / 29 / 23 / 18
		Heating (P-Hi/Hi/Me/Lo)	32 / 26 / 21 / 16.5	34 / 29 / 23 / 18
	Outdoor	Cooling/Heating	75 / 73	75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	250 x 1620 x 690	
	Outdoor		845 x 970 x 370	
Net weight	Indoor		43	
	Outdoor		78	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.50	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2	
	Heating	°CWB	-20 to 20	
Air filter, Q'ty			Pocket Plastic net x2(Washable)	
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3	

NOTES:

The data are measured under the following conditions(ISO-T1, -H1).

Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

*3 : The values are for one indoor unit operation. (Multi system only)

The values are for simultaneous Multi operation.

R32			Micro Inverter			
Set model name			FDE100VNAVPVH	FDE125VNAVPVH	FDE140VNAVPVH	FDE140VNAWTVH
			Twin			Triple
Indoor unit			FDE50VH x 2	FDE60VH x 2	FDE71VH x 2	FDE50VH x 3
Outdoor unit			FDC100VNA-W	FDC125VNA-W	FDC140VNA-W	FDC140VNA-W
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)	kW		10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW		11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	kW	3.12 / 2.99	4.16 / 3.54	4.74 / 4.21	4.74 / 4.21
EER/COP	Cooling/Heating		3.21 / 3.75	3.00 / 3.95	2.87 / 3.68	2.87 / 3.68
Inrush current		A	5	5	5	5
Max. current			24	24	24	24
Sound power level*1	Indoor ³	Cooling/Heating	60 / 60	60 / 60	60 / 60	60 / 60
	Outdoor	Cooling/Heating	69 / 70	71 / 71	72 / 73	72 / 73
Sound pressure level*1	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	46 / 38 / 36 / 31	47 / 41 / 37 / 32	47 / 41 / 37 / 32	46 / 38 / 36 / 31
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	46 / 38 / 36 / 31	47 / 41 / 37 / 32	47 / 41 / 37 / 32	46 / 38 / 36 / 31
Air flow	Indoor ³	Cooling/Heating	54 / 55	54 / 56	56 / 58	56 / 58
	Outdoor	Cooling (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 7	20 / 16 / 13 / 10	20 / 16 / 13 / 10	13 / 10 / 9 / 7
Exterior dimensions	Indoor	HeightsWidthxDepth	210 x 1070 x 690	210 x 1320 x 690		210 x 1070 x 690
	Outdoor			845 x 970 x 370		
Net weight	Indoor		28	33		28
	Outdoor			77		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m	Max. 50			
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15			
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2			
	Heating	°CWB	-20 to 20			
Air filter, Q'ty			Pocket plastic net x 2(Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3			

The values are for simultaneous Multi operation.

R32			Micro Inverter			
Set model name			FDE100VSAVPVH	FDE125VSAVPVH	FDE140VSAVPVH	FDE140VSAWTVH
			Twin			Triple
Indoor unit			FDE50VH x 2	FDE60VH x 2	FDE71VH x 2	FDE50VH x 3
Outdoor unit			FDC100VSA-W	FDC125VSA-W	FDC140VSA-W	FDC140VSA-W
Power source			3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)	kW		10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW		11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	kW	3.12 / 2.99	4.16 / 3.54	4.74 / 4.21	4.74 / 4.21
EER/COP	Cooling/Heating		3.21 / 3.75	3.00 / 3.95	2.87 / 3.68	2.87 / 3.68
Inrush current		A	5	5	5	5
Max. current			15	15	15	15
Sound power level*1	Indoor ³	Cooling/Heating	60 / 60	60 / 60	60 / 60	60 / 60
	Outdoor	Cooling/Heating	69 / 70	71 / 71	72 / 73	72 / 73
Sound pressure level*1	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	46 / 38 / 36 / 31	47 / 41 / 37 / 32	47 / 41 / 37 / 32	46 / 38 / 36 / 31
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	46 / 38 / 36 / 31	47 / 41 / 37 / 32	47 / 41 / 37 / 32	46 / 38 / 36 / 31
Air flow	Indoor ³	Cooling/Heating	54 / 55	54 / 56	56 / 58	56 / 58
	Outdoor	Cooling (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 7	20 / 16 / 13 / 10	20 / 16 / 13 / 10	13 / 10 / 9 / 7
Exterior dimensions	Indoor	HeightsWidthxDepth	210 x 1070 x 690	210 x 1320 x 690		210 x 1070 x 690
	Outdoor			845 x 970 x 370		
Net weight	Indoor		28	33		28
	Outdoor			78		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m	Max.50			
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15			
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2			
	Heating	°CWB	-20 to 20			
Air filter, Q'ty			Pocket plastic net x 2(Washable)			
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3			

SPECIFICATIONS - FDE -

The values are for simultaneous Multi operation.

R32		Micro Inverter			
		FDE200VSAWPVH	FDE250VSAWPVH	FDE280VSAWPVH	FDE200VSAWTVH
Set model name		Twin		Triple	
Indoor unit		FDE100VH x 2	FDE125VH x 2	FDE140VH x 2	FDE71VH x 3
Outdoor unit		FDC200VSA-W	FDC250VSA-W	FDC280VSA-W	FDC200VSA-W
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)		kW 20.0 (6.7 - 22.4)	25.0 (6.7 - 28.0)	27.0 (7.1 - 31.5)	20.0 (7.5 - 22.4)
Nominal heating capacity (Min - Max)		kW 22.4 (6.6 - 25.0)	28.0 (5.2 - 31.5)	30.0 (5.8 - 33.5)	22.4 (6.6 - 25.0)
Power consumption		Cooling/Heating kW 6.29 / 5.66	8.20 / 7.93	9.31 / 8.98	6.29 / 5.66
EER/COP		Cooling/Heating 3.18 / 3.96	3.05 / 3.53	2.90 / 3.34	3.18 / 3.96
Inrush current		A 5	5	5	5
Max. current		19	20	20	19
Sound power level*1	Indoor*3	Cooling/Heating 64 / 64	64 / 64	65 / 65	60 / 60
	Outdoor	Cooling/Heating 72 / 74	73 / 75	75 / 77	72 / 74
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo) dB(A) 48 / 43 / 38 / 34	48 / 45 / 40 / 35	49 / 45 / 40 / 36	47 / 41 / 37 / 32
	Outdoor	Heating (P-Hi/Hi/Me/Lo) 48 / 43 / 38 / 34	48 / 45 / 40 / 35	49 / 45 / 40 / 36	47 / 41 / 37 / 32
Air flow	Indoor*3	Cooling/Heating m ³ /min 58 / 59	58 / 62	61 / 63	58 / 59
	Outdoor	Cooling (P-Hi/Hi/Me/Lo) 32 / 26 / 21 / 16.5	32 / 29 / 23 / 17	34 / 29 / 23 / 18	20 / 16 / 13 / 10
Exterior dimensions	Indoor	Heating (P-Hi/Hi/Me/Lo) 32 / 26 / 21 / 16.5	32 / 29 / 23 / 17	34 / 29 / 23 / 18	20 / 16 / 13 / 10
	Outdoor	Cooling/Heating 148 / 134	148 / 153	136 / 140	148 / 134
Net weight		250 x 1620 x 690		210 x 1320 x 690	
Ref.piping size		1505 x 970 x 370		43	
Refrigerant line (one way) length		kg 144		145	
Vertical height differences		Max.70		Max.60	
Outdoor operating temperature range		Max.50*4 / Max.15		Max.60	
Air filter, Q'ty		-15 to 50*2		-20 to 20	
Remote control (option)		Pocket plastic net x 2(Washable)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3	

The values are for simultaneous Multi operation.

R32		Micro Inverter			
		FDE200VSAWDVH	FDE250VSAWDVH	FDE280VSAWDVH	
Set model name		Double Twin			
Indoor unit		FDE50VH x 4	FDE60VH x 4	FDE71VH x 4	
Outdoor unit		FDC200VSA-W	FDC250VSA-W	FDC280VSA-W	
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)		kW 20.0 (7.8 - 22.4)	25.0 (7.8 - 28.0)	27.0 (7.5 - 31.5)	
Nominal heating capacity (Min - Max)		kW 22.4 (6.6 - 25.0)	28.0 (5.2 - 31.5)	30.0 (5.8 - 33.5)	
Power consumption		Cooling/Heating kW 6.29 / 5.66	8.04 / 7.32	9.15 / 8.98	
EER/COP		Cooling/Heating 3.18 / 3.96	3.11 / 3.83	2.95 / 3.34	
Inrush current		A 5	5	5	
Max. current		19	20	20	
Sound power level*1	Indoor*3	Cooling/Heating 60 / 60	60 / 60	60 / 60	
	Outdoor	Cooling/Heating 72 / 74	73 / 75	75 / 77	
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo) dB(A) 46 / 38 / 36 / 31	47 / 41 / 37 / 32	47 / 41 / 37 / 32	
	Outdoor	Heating (P-Hi/Hi/Me/Lo) 46 / 38 / 36 / 31	47 / 41 / 37 / 32	47 / 41 / 37 / 32	
Air flow	Indoor*3	Cooling/Heating 58 / 59	58 / 62	61 / 63	
	Outdoor	Cooling (P-Hi/Hi/Me/Lo) m ³ /min 13 / 10 / 9 / 7	20 / 16 / 13 / 10	20 / 16 / 13 / 10	
Exterior dimensions	Indoor	Heating (P-Hi/Hi/Me/Lo) 13 / 10 / 9 / 7	20 / 16 / 13 / 10	20 / 16 / 13 / 10	
	Outdoor	Cooling/Heating 148 / 134	148 / 153	136 / 140	
Net weight		210 x 1070 x 690		210 x 1320 x 690	
Ref.piping size		1505 x 970 x 370		28	
Refrigerant line (one way) length		kg 144		145	
Vertical height differences		Max.70		Max.60	
Outdoor operating temperature range		Max.50*4 / Max.15		Max.60	
Air filter, Q'ty		-15 to 50*2		-20 to 20	
Remote control (option)		Pocket plastic net x 2(Washable)		Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3	

NOTES:

The data are measured under the following conditions(R32 : ISO-T1, -H1 / R410A : ISO-T1).

Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

*3 : The values are for one indoor unit operation. (Multi system only)

*4 : In case of following conditions:Max.50m(Outdoor unit is higher & Outdoor temperature ≤ 43°C), Max.30m(Outdoor unit is higher & Outdoor temperature > 43°C)

R410A		Micro Inverter					
Set model name		FDE100VNAVH	FDE125VNAVH	FDE140VNAVH	FDE100VSAVH	FDE125VSAVH	FDE140VSAVH
Indoor unit		FDE100VH	FDE125VH	FDE140VH	FDE100VH	FDE125VH	FDE140VH
Outdoor unit		FDC100VNA	FDC125VNA	FDC140VNA	FDC100VSA	FDC125VSA	FDC140VSA
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	2.85 / 2.70	4.45 / 3.74	5.21 / 4.42	2.85 / 2.70	4.45 / 3.74	5.21 / 4.42
EER/COP	Cooling/Heating	3.51 / 4.15	2.81 / 3.74	2.61 / 3.51	3.51 / 4.15	2.81 / 3.74	2.61 / 3.51
Inrush current		5	5	5	5	5	5
Max. current		24	24	24	15	15	15
Sound power level*1	Indoor	Cooling/Heating	64 / 64	64 / 64	65 / 65	64 / 64	64 / 64
	Outdoor	Cooling/Heating	70 / 70	71 / 71	73 / 73	70 / 70	71 / 71
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	48 / 43 / 38 / 34	48 / 45 / 40 / 35	49 / 45 / 40 / 36	48 / 43 / 38 / 34	48 / 45 / 40 / 35
		Heating (P-Hi/Hi/Me/Lo)	48 / 43 / 38 / 34	48 / 45 / 40 / 35	49 / 45 / 40 / 36	48 / 43 / 38 / 34	48 / 45 / 40 / 35
	Outdoor	Cooling/Heating	54 / 56	55 / 57	57 / 59	54 / 56	55 / 57
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	32 / 26 / 21 / 16.5	32 / 29 / 23 / 17	34 / 29 / 23 / 18	32 / 26 / 21 / 16.5	32 / 29 / 23 / 17
		Heating (P-Hi/Hi/Me/Lo)	32 / 26 / 21 / 16.5	32 / 29 / 23 / 17	34 / 29 / 23 / 18	32 / 26 / 21 / 16.5	32 / 29 / 23 / 17
	Outdoor	Cooling/Heating	75 / 73	75 / 73	75 / 73	75 / 73	75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	250 x 1620 x 690				
	Outdoor		845 x 970 x 370				
Net weight	Indoor		43				
	Outdoor		80				82
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")				
Refrigerant line (one way) length		m	Max.50				
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15				
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2				
	Heating	°CWB	-20 to 20				
Air filter, Q'ty			Pocket Plastic net x2(Washable)				
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3				

The values are for simultaneous Multi operation.

R410A		Micro Inverter			
Set model name		FDE100VNAPVH	FDE125VNAPVH	FDE140VNAPVH	FDE140VNATVH
Indoor unit		FDE50VH x 2	FDE60VH x 2	FDE71VH x 2	FDE50VH x 3
Outdoor unit		FDC100VNA	FDC125VNA	FDC140VNA	FDC140VNA
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	3.12 / 2.99	4.16 / 3.54	4.74 / 4.21	4.74 / 4.21
EER/COP	Cooling/Heating	3.21 / 3.75	3.00 / 3.95	2.87 / 3.68	2.87 / 3.68
Inrush current		5	5	5	5
Max. current		24	24	24	24
Sound power level*1	Indoor*3	Cooling/Heating	60 / 60	60 / 60	60 / 60
	Outdoor	Cooling/Heating	70 / 70	71 / 71	73 / 73
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	46 / 38 / 36 / 31	47 / 41 / 37 / 32	47 / 41 / 37 / 32
		Heating (P-Hi/Hi/Me/Lo)	46 / 38 / 36 / 31	47 / 41 / 37 / 32	47 / 41 / 37 / 32
	Outdoor	Cooling/Heating	54 / 56	55 / 57	57 / 59
Air flow	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 7	20 / 16 / 13 / 10	20 / 16 / 13 / 10
		Heating (P-Hi/Hi/Me/Lo)	13 / 10 / 9 / 7	20 / 16 / 13 / 10	20 / 16 / 13 / 10
	Outdoor	Cooling/Heating	75 / 73	75 / 73	75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	210 x 1070 x 690	210 x 1320 x 690	210 x 1070 x 690
	Outdoor		845 x 970 x 370		
Net weight	Indoor		28	33	28
	Outdoor		80		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max. 50		
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2		
	Heating	°CWB	-20 to 20		
Air filter, Q'ty			Pocket plastic net x 2(Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3		

SPECIFICATIONS - FDE -

The values are for simultaneous Multi operation.

R410A		Micro Inverter			
Set model name		FDE100VSAPVH	FDE125VSAPVH	FDE140VSAPVH	FDE140VSATVH
		Twin		Triple	
Indoor unit		FDE50VH x 2	FDE60VH x 2	FDE71VH x 2	FDE50VH x 3
Outdoor unit		FDC100VSA	FDC125VSA	FDC140VSA	FDC140VSA
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating kW	3.12 / 2.99	4.16 / 3.54	4.74 / 4.21	4.74 / 4.21
EER/COP	Cooling/Heating	3.21 / 3.75	3.00 / 3.95	2.87 / 3.68	2.87 / 3.68
Inrush current	A	5	5	5	5
Max. current		15	15	15	15
Sound power level*1	Indoor ³	Cooling/Heating	60 / 60	60 / 60	60 / 60
	Outdoor	Cooling/Heating	70 / 70	71 / 71	73 / 73
Sound pressure level*1	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	46 / 38 / 36 / 31	47 / 41 / 37 / 32	47 / 41 / 37 / 32
	Outdoor	Cooling/Heating	46 / 38 / 36 / 31	47 / 41 / 37 / 32	47 / 41 / 37 / 32
Air flow	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	54 / 56	55 / 57	57 / 59
	Outdoor	Cooling/Heating	13 / 10 / 9 / 7	20 / 16 / 13 / 10	20 / 16 / 13 / 10
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	210 x 1070 x 690	210 x 1320 x 690
	Outdoor			845 x 970 x 370	210 x 1070 x 690
Net weight	Indoor		kg	28	33
	Outdoor			82	28
Ref.piping size	Liquid/Gas		ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length			m	Max.50	
Vertical height differences	Outdoor is higher/lower		m	Max.50 / Max.15	
Outdoor operating temperature range	Cooling		°CDB	-15 to 50*2	
	Heating		°CWB	-20 to 20	
Air filter, Q'ty				Pocket plastic net x 2(Washable)	
Remote control (option)				Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3	

The values are for simultaneous Multi operation.

R410A		Micro Inverter				
Set model name		FDE200VSAPVH	FDE250VSAPVH	FDE200VSATVH	FDE200VSADVH	FDE250VSADVH
		Twin		Triple	Double Twin	
Indoor unit		FDE100VH x 2	FDE125VH x 2	FDE71VH x 3	FDE50VH x 4	FDE60VH x 4
Outdoor unit		FDC200VSA	FDC250VSA	FDC200VSA	FDC200VSA	FDC250VSA
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz				
Nominal cooling capacity (Min - Max)	kW	19.0 (5.2 - 22.4)	24.0 (6.9 - 28.0)	19.0 (5.2 - 22.4)	19.0 (5.2 - 22.4)	24.0 (6.9 - 28.0)
Nominal heating capacity (Min - Max)	kW	22.4 (3.3 - 25.0)	27.0 (5.5 - 31.5)	22.4 (3.3 - 25.0)	22.4 (3.3 - 25.0)	27.0 (5.5 - 31.5)
Power consumption	Cooling/Heating kW	6.34 / 6.10	8.52 / 7.54	6.33 / 5.94	6.90 / 7.10	8.00 / 7.02
EER/COP	Cooling/Heating	3.00 / 3.67	2.82 / 3.58	3.00 / 3.77	2.75 / 3.15	3.00 / 3.85
Inrush current	A	5	5	5	5	5
Max. current		20	21	20	20	21
Sound power level*1	Indoor ³	Cooling/Heating	64 / 64	64 / 64	60 / 60	60 / 60
	Outdoor	Cooling/Heating	72 / 74	73 / 75	72 / 74	72 / 74
Sound pressure level*1	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	48 / 43 / 38 / 34	48 / 45 / 40 / 35	47 / 41 / 37 / 32	46 / 38 / 36 / 31
	Outdoor	Cooling/Heating	48 / 43 / 38 / 34	48 / 45 / 40 / 35	47 / 41 / 37 / 32	46 / 38 / 36 / 31
Air flow	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	58 / 59	59 / 62	58 / 59	59 / 62
	Outdoor	Cooling/Heating	32 / 26 / 21 / 16.5	32 / 29 / 23 / 17	20 / 16 / 13 / 10	13 / 10 / 9 / 7
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	250 x 1620 x 690	210 x 1320 x 690	210 x 1070 x 690
	Outdoor			1300 x 970 x 370	1505 x 970 x 370	1300 x 970 x 370
Net weight	Indoor		kg	43	33	28
	Outdoor			115	143	115
Ref.piping size	Liquid/Gas		ømm	9.52(3/8") / 22.22(7/8")	12.7(1/2") / 22.22(7/8")	9.52(3/8") / 22.22(7/8")
Refrigerant line (one way) length			m	Max.70		
Vertical height differences	Outdoor is higher/lower		m	Max.30 / Max.15		
Outdoor operating temperature range	Cooling		°CDB	-15 to 50*2		
	Heating		°CWB	-15 to 20		
Air filter, Q'ty				Pocket plastic net x 2(Washable)		
Remote control (option)				Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3		

NOTES:

The data are measured under the following conditions(R32 : ISO-T1, -H1 / R410A : ISO-T1).
 Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
 *1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 *2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.
 *3 : The values are for one indoor unit operation. (Multi system only)


R32		Standard Inverter			
Set model name		FDE71VNPWVH	FDE90VNPWVH	FDE100VNPWVH	FDE125VNPWVH
Indoor unit		FDE71VH	FDE100VH	FDE100VH	FDE125VH
Outdoor unit		FDC71VNP-W	FDC90VNP-W	FDC100VNP-W	FDC125VNP-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)		kW 7.1 (1.5 - 7.3)	9.0 (2.1 - 9.5)	10.0 (2.1 - 10.2)	12.1 (5.0 - 12.1)
Nominal heating capacity (Min - Max)		kW 7.1 (1.1 - 7.3)	9.0 (1.7 - 9.5)	10.0 (1.7 - 10.4)	12.1 (4.0 - 13.3)
Power consumption	Cooling/Heating	kW 2.41 / 1.96	2.38 / 1.99	3.00 / 2.36	3.88 / 3.30
EER/COP	Cooling/Heating	2.95 / 3.62	3.78 / 4.52	3.33 / 4.24	3.12 / 3.67
Inrush current		A 5	5	5	5
Max. current		15.8	19	19	18
Sound power level*1	Indoor	Cooling/Heating	60 / 60	64 / 64	64 / 64
	Outdoor	Cooling/Heating	67 / 67	67 / 66	68 / 67
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	47 / 41 / 37 / 32	48 / 43 / 38 / 34	48 / 43 / 38 / 34
		Heating (P-Hi/Hi/Me/Lo)	47 / 41 / 37 / 32	48 / 43 / 38 / 34	48 / 43 / 38 / 34
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	20 / 16 / 13 / 10	32 / 26 / 21 / 16.5	32 / 26 / 21 / 16.5
		Heating (P-Hi/Hi/Me/Lo)	20 / 16 / 13 / 10	32 / 26 / 21 / 16.5	32 / 29 / 23 / 17
	Outdoor	Cooling/Heating	42 / 42	59 / 55	63 / 55
Exterior dimensions	Indoor	HeightxWidthxDepth	mm 210 x 1320 x 690	250 x 1620 x 690	
	Outdoor		640 x 800(+71) x 290	750 x 880(+88) x 340	845 x 970 x 370
Net weight	Indoor		kg 33	43	
	Outdoor		45	57	73
Ref.piping size	Liquid/Gas	ømm	6.35(1/4") / 12.7(1/2")	6.35(1/4") / 15.88(5/8")	9.52(3/8") / 15.88(5/8")
Refrigerant line (one way) length		m	Max.30		
Vertical height differences	Outdoor is higher/lower	m	Max.20 / Max.20		
Outdoor operating temperature range	Cooling	°CDB	-15 to 46*2		
	Heating	°CWB	-15 to 20		
Air filter, Q'ty			Pocket Plastic net x2(Washable)		
Remote control (option)			Wired:RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless:RCN-E-E3		

FDF

Indoor Unit Floor Standing



FDF 71/100/125/140

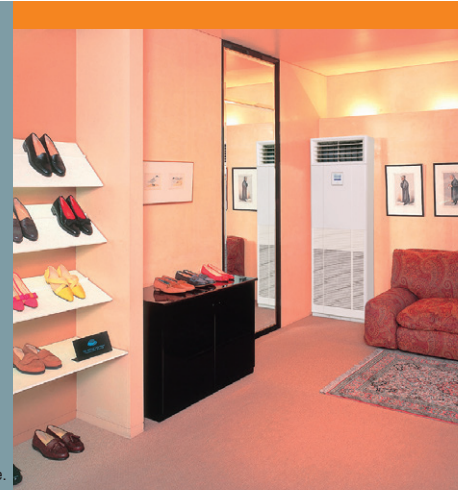

*The remote control for the FDF-VD series will be RC-E5 type remote.

- Energy Saving
- Home Leave
- Hi Power
- Auto Swing
- Weekly Timer
- Favourite Setting




Remote control (Option)



*Not all functions available with all remote control options.

High Efficiency

Energy efficiency is improved by New heat exchanger design (In case of Hyper INV).

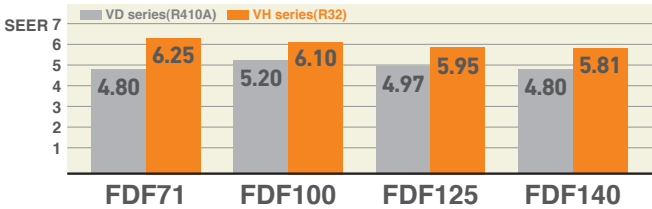


Improved operability and visibility

Equipped with eco-touch remote control as standard equipment. Various functions can now be controlled. (VH series)



Wide and Powerful Air Flow

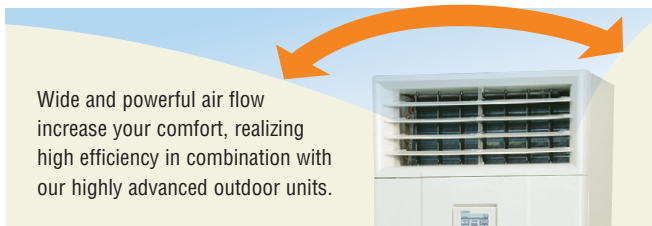

Equipped with a leak detector device


Can now be safely used with the new refrigerant detector that detects leakage of the refrigerant. (VH series)

Remote control will integrate leak detector functions:
Audible and visible alarm



Motion Sensor (Option)

Motion sensor is equipped in the ceiling plane or wall plane and detects the presence/absence and activity of humans in a room to improve the comfort and energy saving performance of the unit.

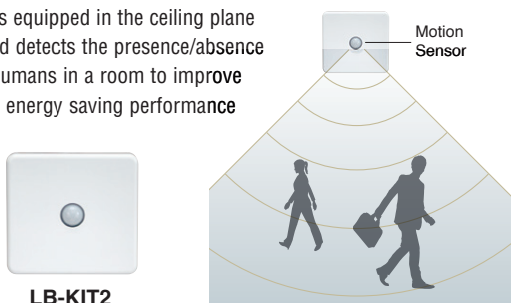


Easy Transportation and Installation Workability

Piping and drain hose connection can be selected out of 4-directions and the selection makes installation workability more effective.

Due to slim design (Depth: 329mm, weight:49kg), easy transportation and installation are realized.

Easy Maintenance

The surface of heat exchanger can be appeared only removing the front panel. Easy cleaning of heat exchanger is possible.





OUTDOOR UNIT

		Hyper Inverter	
FDC		71VNX-W	100-140VN(S)X-W
		-	100-140VN(S)X
model			
Chargeless		30m	
Height x Width x Depth (mm)		750 x 880(+88) x 340	1300 x 970 x 370

		Micro Inverter			Standard Inverter	
FDC		100-140VN(S)A-W	-	200-250-280VSA-W	71VNP-W	90-100VNP-W
		100-140VN(S)A	200VSA	250VSA	-	-
model						
Chargeless		30m			15m	
Height x Width x Depth (mm)		845 x 970 x 370	1300 x 970 x 370	1505 x 970 x 370	640 x 800(+71) x 290	750 x 880(+88) x 340

DIMENSIONS (Unit:mm) - FDF -

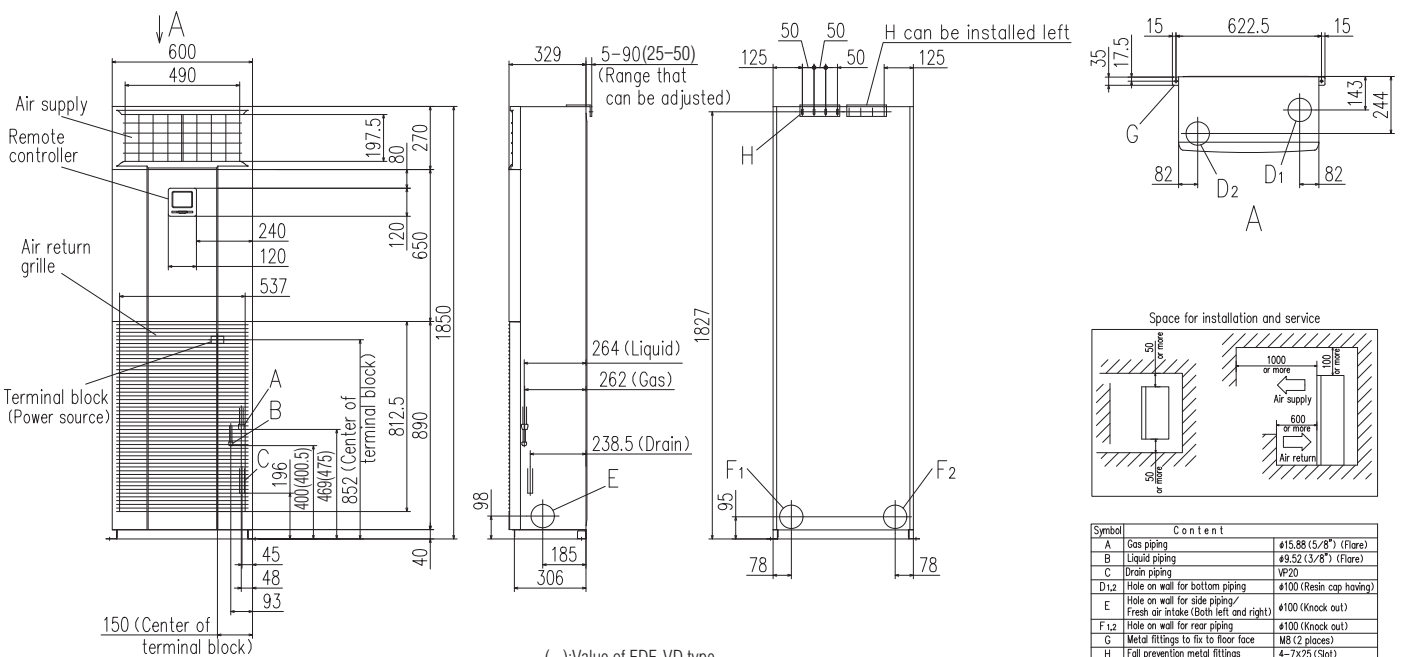

Symbol	Content	
A	Gas piping	φ15.88 (5/8") (Flare)
B	Liquid piping	φ9.52 (3/8") (Flare)
C	Drain piping	VP20
D1,2	Hole on wall for side piping/ Fresh air intake (Both left and right)	φ100 (Resin cap having)
E	Hole on wall for rear piping/ Fresh air intake (Both left and right)	φ100 (Knock out)
F1,2	Hole on wall for rear piping	φ100 (Knock out)
G	Metal fittings to fix to floor face	M8 (2 places)
H	Fall prevention metal fittings	4~7x25 (Slot)

*FDF-VD type does not have F₂ and D₂.

SPECIFICATIONS - FDF -

R32		Hyper Inverter			
Set model name		FDF71VNXWVH	FDF100VNXWVH	FDF125VNXWVH	FDF140VNXWVH
Indoor unit		FDF71VH	FDF100VH	FDF125VH	FDF140VH
Outdoor unit		FDC71VNX-W	FDC100VNX-W	FDC125VNX-W	FDC140VNX-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min - Max)		kW 7.1 (3.2 - 8.0)	10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)		kW 8.0 (3.6 - 9.0)	11.2 (2.7 - 12.5)	14.0 (2.7 - 17.0)	16.0 (2.7 - 18.0)
Power consumption	Cooling/Heating	kW 1.97 / 2.21	2.66 / 2.94	3.74 / 3.88	4.62 / 4.69
EER/COP	Cooling/Heating	3.61 / 3.62	3.76 / 3.81	3.34 / 3.61	3.03 / 3.41
Inrush current		A 5	5	5	5
Max. current		19.1	25.0	27.0	27.0
Sound power level*1	Indoor	Cooling/Heating	55 / 55	65 / 65	67 / 67
	Outdoor	Cooling/Heating	66 / 66	67 / 67	68 / 70
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	42 / 39 / 35 / 33	53 / 51 / 49 / 44	55 / 51 / 49 / 44
	Indoor	Heating (P-Hi/Hi/Me/Lo)	42 / 39 / 35 / 33	53 / 51 / 49 / 44	55 / 51 / 49 / 44
	Outdoor	Cooling/Heating	51 / 51	53 / 51	53 / 54
	Outdoor	Cooling/Heating	51 / 51	53 / 51	53 / 54
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	18 / 16 / 14 / 12	27 / 26 / 23 / 19	29 / 26 / 23 / 19
	Indoor	Heating (P-Hi/Hi/Me/Lo)	18 / 16 / 14 / 12	27 / 26 / 23 / 19	29 / 26 / 23 / 19
	Outdoor	Cooling/Heating	60 / 50	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	mm 1850 × 600 × 329		
	Outdoor	HeightxWidthxDepth	750 × 880(+88) × 340	1300 x 970 x 370	
Net weight	Indoor		47	49	
	Outdoor		60	97	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Max.50	Min. 3, Max.100	
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2		
	Heating	°CWB	-20 to 20		
Air filter, Q'ty			Plastic net x1(Washable)		
Remote control (option)			Wired : RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless : RCN-KIT4-E2		

R32		Hyper Inverter			
Set model name		FDF100VSXWVH	FDF125VSXWVH	FDF140VSXWVH	
Indoor unit		FDF100VH	FDF125VH	FDF140VH	
Outdoor unit		FDC100VSX-W	FDC125VSX-W	FDC140VSX-W	
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz			
Nominal cooling capacity (Min - Max)		kW 10.0 (3.5 - 11.2)	12.5 (3.5 - 14.0)	14.0 (3.5 - 16.0)	
Nominal heating capacity (Min - Max)		kW 11.2 (2.7 - 16.0)	14.0 (2.7 - 18.0)	16.0 (2.7 - 20.0)	
Power consumption	Cooling/Heating	kW 2.66 / 2.95	3.74 / 3.88	4.62 / 4.70	
EER/COP	Cooling/Heating	3.76 / 3.80	3.34 / 3.61	3.03 / 3.41	
Inrush current		A 5	5	5	
Max. current		14.0	14.0	14.0	
Sound power level*1	Indoor	Cooling/Heating	65 / 65	67 / 67	
	Outdoor	Cooling/Heating	67 / 67	68 / 70	
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	53 / 51 / 49 / 44	55 / 51 / 49 / 44	
	Indoor	Heating (P-Hi/Hi/Me/Lo)	53 / 51 / 49 / 44	55 / 51 / 49 / 44	
	Outdoor	Cooling/Heating	53 / 51	53 / 54	
	Outdoor	Cooling/Heating	53 / 51	53 / 54	
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	27 / 26 / 23 / 19	29 / 26 / 23 / 19	
	Indoor	Heating (P-Hi/Hi/Me/Lo)	27 / 26 / 23 / 19	29 / 26 / 23 / 19	
	Outdoor	Cooling/Heating	100 / 100	100 / 100	
Exterior dimensions	Indoor	HeightxWidthxDepth	mm 1850 × 600 × 329		
	Outdoor	HeightxWidthxDepth	1300 × 970 × 370		
Net weight	Indoor		49		
	Outdoor		99		
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		
Refrigerant line (one way) length		m	Min. 3, Max.100		
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15		
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2		
	Heating	°CWB	-20 to 20		
Air filter, Q'ty			Plastic net x1(Washable)		
Remote control (option)			Wired : RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless : RCN-KIT4-E2		

NOTES:

The data are measured under the following conditions(R32 : ISO-T1, -H1 / R410A : ISO-T1).
Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.
*3 : The values are for one indoor unit operation. (Multi system only)

The values are for simultaneous Multi operation.

R32			Hyper Inverter		
Set model name			FDF140VNXWPVH		FDF140VSXWPVH
			Twin		
Indoor unit			FDF71VH x 2		FDF71VH x 2
Outdoor unit			FDC140VNX-W		FDC140VSX-W
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz		3 Phase 380-415V, 50Hz / 380V, 60Hz
Nominal cooling capacity (Min - Max)			14.0 (3.5 - 16.0)		14.0 (3.5 - 16.0)
Nominal heating capacity (Min - Max)			16.0 (2.7 - 18.0)		16.0 (2.7 - 20.0)
Power consumption			3.78 / 4.26		3.78 / 4.27
EER/COP			3.71 / 3.75		3.71 / 3.75
Inrush current			5		5
Max. current			27.0		14.0
Sound power level*1	Indoor	Cooling/Heating	55 / 55		55 / 55
	Outdoor	Cooling/Heating	69 / 71		69 / 71
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	42 / 39 / 35 / 33		42 / 39 / 35 / 33
		Heating (P-Hi/Hi/Me/Lo)	42 / 39 / 35 / 33		42 / 39 / 35 / 33
	Outdoor	Cooling/Heating	54 / 54		54 / 54
		Cooling/Heating	18 / 16 / 14 / 12		18 / 16 / 14 / 12
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	18 / 16 / 14 / 12		18 / 16 / 14 / 12
	Outdoor	Cooling/Heating	100 / 100		100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	1850 x 600 x 329		
	Outdoor	HeightxWidthxDepth	1300 x 970 x 370		
Net weight	Indoor		47		
	Outdoor		97		99
Ref.piping size			Liquid/Gas		
Refrigerant line (one way) length			9.52(3/8") / 15.88(5/8")		
Vertical height differences			Min. 3, Max.100		
Outdoor operating temperature range			Max.50 / Max.15		
Air filter, Q'ty			-15 to 50*2		
Remote control (option)			-20 to 20		
			Plastic net x1(Washable)		
			Wired : RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless : RCN-KIT4-E2		

R410A			Hyper Inverter		
Set model name			FDF100VNXVD2	FDF125VNXVD	FDF140VNXVD
Indoor unit			FDF100VD2	FDF125VD	FDF140VD
Outdoor unit			FDC100VNX	FDC125VNX	FDC140VNX
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)			10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)			11.2 (4.0 - 12.5)	14.0 (4.0 - 17.0)	16.0 (4.0 - 18.0)
Power consumption			2.83 / 3.04	3.89 / 3.88	4.65 / 4.69
EER/COP			3.53 / 3.68	3.21 / 3.61	3.01 / 3.41
Inrush current			5	5	5
Max. current			24	26	26
Sound power level*1	Indoor	Cooling/Heating	65 / 65		73 / 73
	Outdoor	Cooling/Heating	70 / 70		72 / 72
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	54 / 50 / 48 / 44		54 / 50 / 48 / 44
		Heating (P-Hi/Hi/Me/Lo)	54 / 50 / 48 / 44		54 / 50 / 48 / 44
	Outdoor	Cooling/Heating	48 / 50		49 / 52
		Cooling/Heating	29 / 26 / 23 / 19		29 / 26 / 23 / 19
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	29 / 26 / 23 / 19		29 / 26 / 23 / 19
	Outdoor	Cooling/Heating	100 / 100		100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	1850 x 600 x 329		
	Outdoor	HeightxWidthxDepth	1300 x 970 x 370		
Net weight	Indoor		52		
	Outdoor		105		
Ref.piping size			Liquid/Gas		
Refrigerant line (one way) length			9.52(3/8") / 15.88(5/8")		
Vertical height differences			Max.100		
Outdoor operating temperature range			Max.30 / Max.15		
Air filter, Q'ty			-15 to 43*2		
Remote control			-20 to 20		
			Plastic net x 1 (Washable)		
			Wired:RC-E5 (installed) Wireless:RCN-KIT4-E2 (option)		

SPECIFICATIONS - FDF -

R410A		Hyper Inverter		
Set model name		FDF100VSXVD2	FDF125VSXVD	FDF140VSXVD
Indoor unit		FDF100VD2	FDF125VD	FDF140VD
Outdoor unit		FDC100VSX	FDC125VSX	FDC140VSX
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)		kW 10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)		kW 11.2 (4.0 - 16.0)	14.0 (4.0 - 18.0)	16.0 (4.0 - 20.0)
Power consumption	Cooling/Heating	kW 2.83 / 3.04	3.89 / 3.88	4.65 / 4.69
EER/COP	Cooling/Heating	3.53 / 3.68	3.21 / 3.61	3.01 / 3.41
Inrush current		A 5	5	5
Max. current		15	15	15
Sound power level*1	Indoor	Cooling/Heating	65 / 65	73 / 73
	Outdoor	Cooling/Heating	70 / 70	72 / 72
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	54 / 50 / 48 / 44	54 / 50 / 48 / 44
		Heating (P-Hi/Hi/Me/Lo)	54 / 50 / 48 / 44	54 / 50 / 48 / 44
	Outdoor	Cooling/Heating	48 / 50	49 / 52
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	29 / 26 / 23 / 19	29 / 26 / 23 / 19
		Heating (P-Hi/Hi/Me/Lo)	29 / 26 / 23 / 19	29 / 26 / 23 / 19
	Outdoor	Cooling/Heating	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	mm 1850 x 600 x 329	
	Outdoor		1300 x 970 x 370	
Net weight	Indoor		kg 52	
	Outdoor		105	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.100	
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 43*2	
	Heating	°CWB	-20 to 20	
Air filter, Q'ty			Plastic net x 1 (Washable)	
Remote control			Wired:RC-E5 (installed) Wireless:RCN-KIT4-E2 (option)	

The values are for simultaneous Multi operation.

R410A		Hyper Inverter		
Set model name		FDF140VNX PVD1	Twin	FDF140VSX PVD1
Indoor unit		FDF71VD1 x 2		FDF71VD1 x 2
Outdoor unit		FDC140VNX		FDC140VSX
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		3 Phase 380-415V, 50Hz / 380V 60Hz
Nominal cooling capacity (Min - Max)		kW 14.0 (5.0 - 16.0)		14.0 (5.0 - 16.0)
Nominal heating capacity (Min - Max)		kW 16.0 (4.0 - 18.0)		16.0 (4.0 - 20.0)
Power consumption	Cooling/Heating	kW 4.83 / 4.97		4.83 / 4.97
EER/COP	Cooling/Heating	2.90 / 3.22		2.90 / 3.22
Inrush current		A 5		5
Max. current		26		15
Sound power level*1	Indoor*3	Cooling/Heating	61 / 61	61 / 61
	Outdoor	Cooling/Heating	72 / 72	72 / 72
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	42 / 39 / 35 / 33	42 / 39 / 35 / 33
		Heating (P-Hi/Hi/Me/Lo)	42 / 39 / 35 / 33	42 / 39 / 35 / 33
	Outdoor	Cooling/Heating	49 / 52	49 / 52
Air flow	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	18 / 16 / 14 / 12	18 / 16 / 14 / 12
		Heating (P-Hi/Hi/Me/Lo)	18 / 16 / 14 / 12	18 / 16 / 14 / 12
	Outdoor	Cooling/Heating	100 / 100	100 / 100
Exterior dimensions	Indoor	HeightxWidthxDepth	mm 1850 x 600 x 329	
	Outdoor		1300 x 970 x 370	
Net weight	Indoor		kg 49	
	Outdoor		105	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.100	
Vertical height differences	Outdoor is higher/lower	m	Max.30 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 43*2	
	Heating	°CWB	-20 to 20	
Air filter, Q'ty			Plastic net x 1 (Washable)	
Remote control			Wired:RC-E5 (installed) Wireless:RCN-KIT4-E2 (option)	

NOTES:

The data are measured under the following conditions(R32 : ISO-T1, -H1 / R410A : ISO-T1).
Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.
*3 : The values are for one indoor unit operation. (Multi system only)

R32		Micro Inverter		
Set model name		FDF100VNAWVH	FDF125VNAWVH	FDF140VNAWVH
Indoor unit		FDF100VH	FDF125VH	FDF140VH
Outdoor unit		FDC100VNA-W	FDC125VNA-W	FDC140VNA-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)		kW 10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)		kW 11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	kW 3.08 / 2.94	4.65 / 4.10	5.35 / 4.98
EER/COP	Cooling/Heating	3.25 / 3.81	2.69 / 3.42	2.54 / 3.11
Inrush current		A 5	5	5
Max. current		24.0	24.0	24.0
Sound power level*1	Indoor	Cooling/Heating	65 / 65	67 / 67
	Outdoor	Cooling/Heating	69 / 70	71 / 71
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	53 / 51 / 49 / 44	55 / 51 / 49 / 44
		Heating (P-Hi/Hi/Me/Lo)	53 / 51 / 49 / 44	55 / 51 / 49 / 44
	Outdoor	Cooling/Heating	54 / 55	54 / 56
		Cooling/Heating	56 / 58	56 / 58
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	m³/min 27 / 26 / 23 / 19	29 / 26 / 23 / 19
		Heating (P-Hi/Hi/Me/Lo)	27 / 26 / 23 / 19	29 / 26 / 23 / 19
	Outdoor	Cooling/Heating	75 / 73	75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	mm 1850 × 600 × 329	
	Outdoor	HeightxWidthxDepth	mm 845 × 970 × 370	
Net weight	Indoor		kg 49	
	Outdoor		kg 77	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.50	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2	
	Heating	°CWB	-20 to 20	
Air filter, Q'ty			Plastic net x1(Washable)	
Remote control (option)			Wired : RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless : RCN-KIT4-E2	

R32		Micro Inverter		
Set model name		FDF100VSAWVH	FDF125VSAWVH	FDF140VSAWVH
Indoor unit		FDF100VH	FDF125VH	FDF140VH
Outdoor unit		FDC100VSA-W	FDC125VSA-W	FDC140VSA-W
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)		kW 10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)		kW 11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	kW 3.09 / 2.94	4.65 / 4.09	5.42 / 4.98
EER/COP	Cooling/Heating	3.25 / 3.81	2.69 / 3.42	2.51 / 3.11
Inrush current		A 5	5	5
Max. current		15.0	15.0	15.0
Sound power level*1	Indoor	Cooling/Heating	65 / 65	67 / 67
	Outdoor	Cooling/Heating	69 / 70	71 / 71
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	53 / 51 / 49 / 44	55 / 51 / 49 / 44
		Heating (P-Hi/Hi/Me/Lo)	53 / 51 / 49 / 44	55 / 51 / 49 / 44
	Outdoor	Cooling/Heating	54 / 55	54 / 56
		Cooling/Heating	56 / 58	56 / 58
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	m³/min 27 / 26 / 23 / 19	29 / 26 / 23 / 19
		Heating (P-Hi/Hi/Me/Lo)	27 / 26 / 23 / 19	29 / 26 / 23 / 19
	Outdoor	Cooling/Heating	75 / 73	75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	mm 1850 × 600 × 329	
	Outdoor	HeightxWidthxDepth	mm 845 × 970 × 370	
Net weight	Indoor		kg 49	
	Outdoor		kg 78	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.50	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2	
	Heating	°CWB	-20 to 20	
Air filter, Q'ty			Plastic net x1(Washable)	
Remote control (option)			Wired : RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless : RCN-KIT4-E2	

SPECIFICATIONS - FDF -

The values are for simultaneous Multi operation.

R32		Micro Inverter				
Set model name		FDF140VNAWPVH	FDF140VSAWPVH	FDF200VSAWPVH	FDF250VSAWPVH	FDF280VSAWPVH
Indoor unit		FDF71VH x 2	FDF71VH x 2	FDF100VH x 2	FDF125VH x 2	FDF140VH x 2
Outdoor unit		FDC140VNA-W	FDC140VSA-W	FDC200VSA-W	FDC250VSA-W	FDC280VSA-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)	20.0 (6.8 - 22.4)	25.0 (6.8 - 28.0)	27.0 (7.5 - 31.5)
Nominal heating capacity (Min - Max)	kW	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)	22.4 (6.6 - 25.0)	28.0 (5.7 - 31.5)	30.0 (6.3 - 33.5)
Power consumption	Cooling/Heating	4.46 / 4.49	4.58 / 4.49	6.71 / 6.06	9.54 / 8.37	10.93 / 9.47
EER/COP	Cooling/Heating	3.05 / 3.46	3.05 / 3.46	2.98 / 3.69	2.62 / 3.35	2.47 / 3.17
Inrush current		5	5	5	5	5
Max. current		24.0	15.0	19.0	20.0	20.0
Sound power level*1	Indoor ³	Cooling/Heating	55 / 55	55 / 55	65 / 65	67 / 67
	Outdoor	Cooling/Heating	72 / 73	72 / 73	72 / 74	73 / 75
Sound pressure level*1	Indoor ³	Cooling (P-Hi/Hi/Me/Lo)	42 / 39 / 35 / 33	42 / 39 / 35 / 33	53 / 51 / 49 / 44	55 / 51 / 49 / 44
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	42 / 39 / 35 / 33	42 / 39 / 35 / 33	53 / 51 / 49 / 44	55 / 51 / 49 / 44
Air flow	Indoor ³	Cooling/Heating	56 / 58	56 / 58	58 / 59	58 / 62
	Outdoor	Cooling/Heating	18 / 16 / 14 / 12	18 / 16 / 14 / 12	27 / 26 / 23 / 19	29 / 26 / 23 / 19
Exterior dimensions	Indoor	HeightxWidthxDepth	18 / 16 / 14 / 12	18 / 16 / 14 / 12	27 / 26 / 23 / 19	29 / 26 / 23 / 19
	Outdoor	HeightxWidthxDepth	75 / 73	75 / 73	148 / 134	148 / 153
Net weight	Indoor		1850 x 600 x 329	1850 x 600 x 329	1505 x 970 x 370	1505 x 970 x 370
	Outdoor		845 x 970 x 370	845 x 970 x 370	1505 x 970 x 370	1505 x 970 x 370
Ref.piping size	Liquid/Gas		845 x 970 x 370	845 x 970 x 370	1505 x 970 x 370	1505 x 970 x 370
Refrigerant line (one way) length			77	78	144	145
Vertical height differences	Outdoor is higher/lower		9.52(3/8") / 15.88(5/8")	9.52(3/8") / 22.22(7/8")	12.7(1/2") / 22.22(7/8")	12.7(1/2") / 22.22(7/8")
Outdoor operating temperature range	Cooling		Max.50	Max.70	Max.70	Max.60
Heating			Max.50 / Max.15	Max.50*4 / Max.15	Max.50*4 / Max.15	Max.50*4 / Max.15
Air filter, Q'ty						
Remote control (option)						

R410A		Micro Inverter		
Set model name		FDF100VNAVD2	FDF125VNAVD	FDF140VNAVD
Indoor unit		FDF100VD2	FDF125VD	FDF140VD
Outdoor unit		FDC100VNA	FDC125VNA	FDC140VNA
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 13.0)	13.0 (5.0 - 13.0)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	3.12 / 2.94	4.65 / 4.14	5.02 / 4.98
EER/COP	Cooling/Heating	3.21 / 3.81	2.69 / 3.38	2.59 / 3.11
Inrush current		5	5	5
Max. current		24	24	24
Sound power level*1	Indoor	Cooling/Heating	65 / 65	73 / 73
	Outdoor	Cooling/Heating	70 / 70	71 / 71
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	54 / 50 / 48 / 44	54 / 50 / 48 / 44
	Outdoor	Heating (P-Hi/Hi/Me/Lo)	54 / 50 / 48 / 44	54 / 50 / 48 / 44
Air flow	Indoor	Cooling/Heating	54 / 56	55 / 57
	Outdoor	Cooling/Heating	29 / 26 / 23 / 19	29 / 26 / 23 / 19
Exterior dimensions	Indoor	HeightxWidthxDepth	29 / 26 / 23 / 19	29 / 26 / 23 / 19
	Outdoor	HeightxWidthxDepth	75 / 73	75 / 73
Net weight	Indoor		1850 x 600 x 329	1850 x 600 x 329
	Outdoor		845 x 970 x 370	845 x 970 x 370
Ref.piping size	Liquid/Gas		845 x 970 x 370	845 x 970 x 370
Refrigerant line (one way) length			52	80
Vertical height differences	Outdoor is higher/lower		9.52(3/8") / 15.88(5/8")	9.52(3/8") / 15.88(5/8")
Outdoor operating temperature range	Cooling		Max.50	Max.50
Heating			Max.50 / Max.15	Max.50 / Max.15
Air filter, Q'ty				
Remote control				

NOTES:

The data are measured under the following conditions(R32 : ISO-T1, -H1 / R410A : ISO-T1).
Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.
*3 : The values are for one indoor unit operation. (Multi system only)
*4 : In case of following conditions:Max.50m(Outdoor unit is higher & Outdoor temperature ≤ 43°C), Max.30m(Outdoor unit is higher & Outdoor temperature > 43°C)

R410A		Micro Inverter		
Set model name		FDF100VSAVD2	FDF125VSAVD	FDF140VSAVD
Indoor unit		FDF100VD2	FDF125VD	FDF140VD
Outdoor unit		FDC100VSA	FDC125VSA	FDC140VSA
Power source		3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	10.0 (4.0 - 11.2)	12.5 (5.0 - 14.0)	13.6 (5.0 - 14.5)
Nominal heating capacity (Min - Max)	kW	11.2 (4.0 - 12.5)	14.0 (4.0 - 16.0)	15.5 (4.0 - 16.5)
Power consumption	Cooling/Heating	3.12 / 2.94	4.65/ 4.14	5.42 / 4.98
EER/COP	Cooling/Heating	3.21 / 3.81	2.69 / 3.38	2.51 / 3.11
Inrush current		5	5	5
Max. current		15	15	15
Sound power level*1	Indoor	Cooling/Heating	65 / 65	73 / 73
	Outdoor	Cooling/Heating	70 / 70	73 / 73
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	54 / 50 / 48 / 44	54 / 50 / 48 / 44
		Heating (P-Hi/Hi/Me/Lo)	54 / 50 / 48 / 44	54 / 50 / 48 / 44
	Outdoor	Cooling/Heating	54 / 56	55 / 57
				57 / 59
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	29 / 26 / 23 / 19	29 / 26 / 23 / 19
		Heating (P-Hi/Hi/Me/Lo)	29 / 26 / 23 / 19	29 / 26 / 23 / 19
	Outdoor	Cooling/Heating	75 / 73	75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	1850 x 600 x 329	
	Outdoor		845 x 970 x 370	
Net weight	Indoor		52	
	Outdoor		82	
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")	
Refrigerant line (one way) length		m	Max.50	
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15	
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2	
	Heating	°CWB	-20 to 20	
Air filter, Q'ty			Plastic net x 1(Washable)	
Remote control			Wired:RC-E5 (installed) Wireless:RCN-KIT4-E2 (option)	

The values are for simultaneous Multi operation.

R410A		Micro Inverter			
Set model name		FDF140VNAPVD1	FDF140VSAPVD1	FDF200VSAPVD2	FDF250VSAPVD
Indoor unit		FDF71VD1 x 2	FDF71VD1 x 2	FDF100VD2 x 2	FDF125VD x 2
Outdoor unit		FDC140VNA	FDC140VSA	FDC200VSA	FDC250VSA
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz	Twin 3 Phase 380-415V, 50Hz / 380V, 60Hz		
Nominal cooling capacity (Min - Max)	kW	13.6 (5.0 - 14.5)	13.6 (5.0 - 14.5)	19.0 (5.2 - 22.4)	24.0 (6.9 - 28.0)
Nominal heating capacity (Min - Max)	kW	15.5 (4.0 - 16.5)	15.5 (4.0 - 16.5)	22.4 (3.3 - 25.0)	27.0 (5.5 - 31.5)
Power consumption	Cooling/Heating	5.15 / 4.35	5.15 / 4.35	6.74 / 6.42	9.15 / 8.49
EER/COP	Cooling/Heating	2.64 / 3.56	2.64 / 3.56	2.82 / 3.49	2.62 / 3.18
Inrush current		5	5	5	5
Max. current		24	15	20	21
Sound power level*1	Indoor*3	Cooling/Heating	61 / 61	65 / 65	73 / 73
	Outdoor	Cooling/Heating	73 / 73	72 / 74	73 / 75
Sound pressure level*1	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	42 / 39 / 35 / 33	42 / 39 / 35 / 33	54 / 50 / 48 / 44
		Heating (P-Hi/Hi/Me/Lo)	42 / 39 / 35 / 33	42 / 39 / 35 / 33	54 / 50 / 48 / 44
	Outdoor	Cooling/Heating	57 / 59	58 / 59	59 / 62
Air flow	Indoor*3	Cooling (P-Hi/Hi/Me/Lo)	18 / 16 / 14 / 12	18 / 16 / 14 / 12	29 / 26 / 23 / 19
		Heating (P-Hi/Hi/Me/Lo)	18 / 16 / 14 / 12	18 / 16 / 14 / 12	29 / 26 / 23 / 19
	Outdoor	Cooling/Heating	75 / 73	135 / 135	143 / 151
Exterior dimensions	Indoor	HeightxWidthxDepth	1850 x 600 x 329		
	Outdoor		845 x 970 x 370	1300 x 970 x 370	1505 x 970 x 370
Net weight	Indoor		49		
	Outdoor		80	82	115
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")		12.7(1/2") / 22.22(7/8")
Refrigerant line (one way) length		m	Max.50		Max.70
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15		Max.30 / Max.15
Outdoor operating temperature range	Cooling	°CDB	-15 to 50*2		
	Heating	°CWB	-20 to 20		-15 to 20
Air filter, Q'ty			Plastic net x 1(Washable)		
Remote control			Wired:RC-E5 (installed) Wireless:RCN-KIT4-E2 (option)		

SPECIFICATIONS - FDF -

R32		Standard Inverter		
Set model name		FDF71VNPVH	FDF90VNPVH	FDF100VNPVH
Indoor unit		FDF71VH	FDF100VH	FDF100VH
Outdoor unit		FDC71VNP-W	FDC90VNP-W	FDC100VNP-W
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min - Max)		kW	7.1 (1.5 - 7.3)	9.0 (2.1 - 9.5)
Nominal heating capacity (Min - Max)		kW	7.1 (1.1 - 7.3)	9.0 (1.7 - 9.5)
Power consumption		Cooling/Heating	kW	2.51 / 2.02
EER/COP		Cooling/Heating		2.82 / 3.51
Inrush current			A	5
Max. current			A	15.8
Sound power level*1	Indoor	Cooling/Heating		55 / 55
	Outdoor	Cooling/Heating		67 / 67
Sound pressure level*1	Indoor	Cooling (P-Hi/Hi/Me/Lo)	dB(A)	42 / 39 / 35 / 33
	Indoor	Heating (P-Hi/Hi/Me/Lo)		42 / 39 / 35 / 33
Air flow	Indoor	Cooling (P-Hi/Hi/Me/Lo)	m ³ /min	18 / 16 / 14 / 12
	Indoor	Heating (P-Hi/Hi/Me/Lo)		18 / 16 / 14 / 12
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	1850 × 600 × 329
	Outdoor			640×800(+71)×290
Net weight	Indoor		kg	47
	Outdoor			45
Ref.piping size	Liquid/Gas	ømm	6.35(1/4") / 12.7(1/2")	
Refrigerant line (one way) length		m	Max.26	
Vertical height differences	Outdoor is higher/lower	m	Max.20 / Max.20	
Outdoor operating temperature range	Cooling	°CDB	-15 to 46*2	
	Heating	°CWB	-15 to 20	
Air filter, Q'ty			Plastic net ×1(Washable)	
Remote control (option)			Wired : RC-EX3D, RC-E5, RC-ES1, RCH-E3 Wireless : RCN-KIT4-E2	

NOTES:

The data are measured under the following conditions(R32 : ISO-T1, -H1).




Cooling:Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating:Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

*1 : Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

*2 : If a cooling operation is conducted when the outdoor air temperature is -5°C or lower, the outdoor unit should be installed at a place where it is not influenced by natural wind. If wind blows, the low pressure will drop and compressor frequency will increase, this will cause the capacity to drop and may cause the unit to break down.

Outdoor Unit Dimensions (Unit:mm)


SRC40ZSX-W1, 50ZSX-W3, 60ZSX-W3

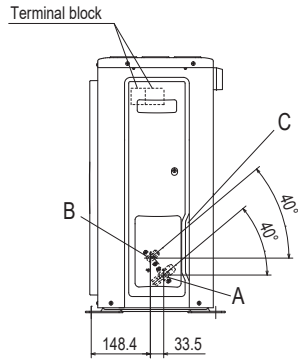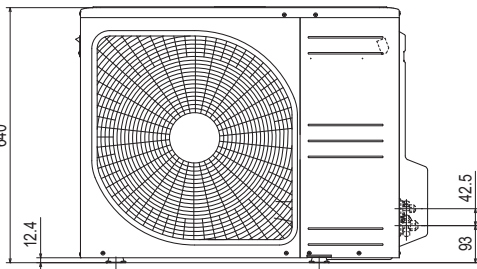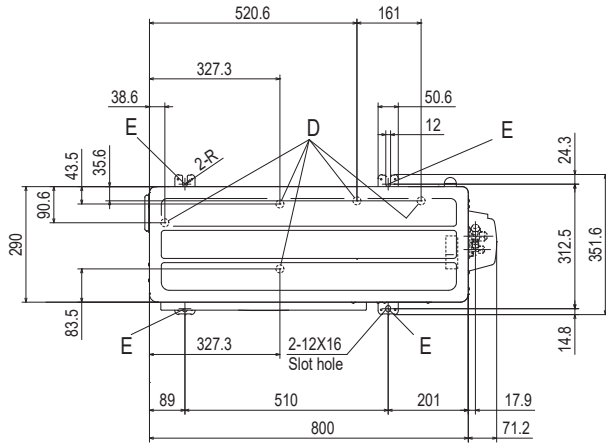

Symbol	Content	
A	Service valve connection (Gas side)	φ 12.7(1/2")(Flare)
B	Service valve connection (Liquid side)	φ 6.35(1/4")(Flare)
C	Pipe/cable draw-out hole	
D	Drain discharge hole	φ 20×5 places
E	Anchor bolt hole	M10-12×4 places

Notes

- (1) The unit must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) If the unit is installed in the location where there is a possibility of strong winds, place the unit such that the direction of air from the outlet gets perpendicular to the wind direction.
- (4) Leave 200mm or more space above the unit.
- (5) The wall height on the outlet side should be 1200mm or less.
- (6) The model name label is attached on the front side of the unit.



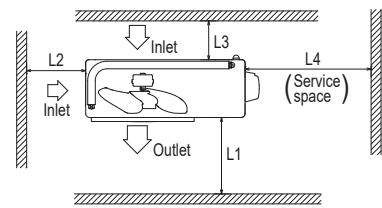


Minimum installation space

Examples Installation	I	II	III	IV
Size				
L1	Open	280	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open


FDC71VNX-W

Symbol	Content	
A	Service valve connection (gas side)	φ 15.88 (5/8") (Flare)
B	Service valve connection (liquid side)	φ 9.52 (3/8") (Flare)
C	Pipe/cable draw-out hole	
D	Drain discharge hole	φ 20 × 3places
E	Anchor bolt hole	M10 × 4places

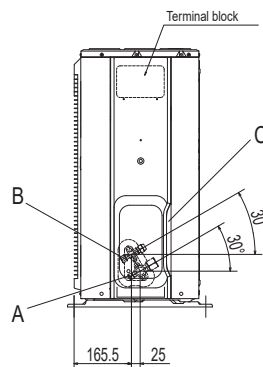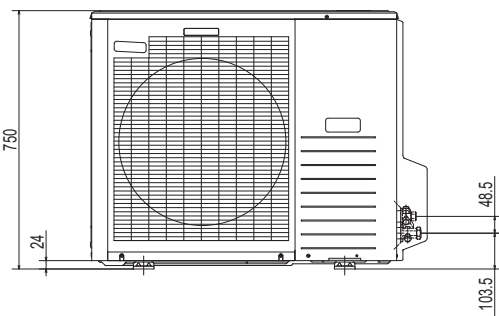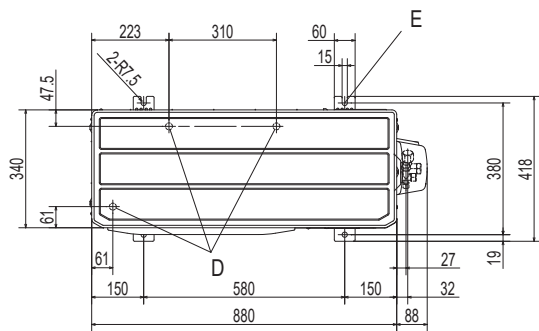

Notes

- (1) It must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction.
- (4) Leave 1m or more space above the unit.
- (5) A wall in front of the blower outlet must not exceed the units height.
- (6) The model name label is attached on the lower right corner of the front panel.




Minimum installation space

Examples of installation	I	II	III
Dimensions			
L1	Open	Open	500
L2	300	250	Open
L3	100	150	100
L4	250	250	250


Outdoor Unit Dimensions (Unit:mm)

FDC100VNX-W, 125VNX-W, 140VNX-W, 100VSX-W, 125VSX-W, 140VSX-W

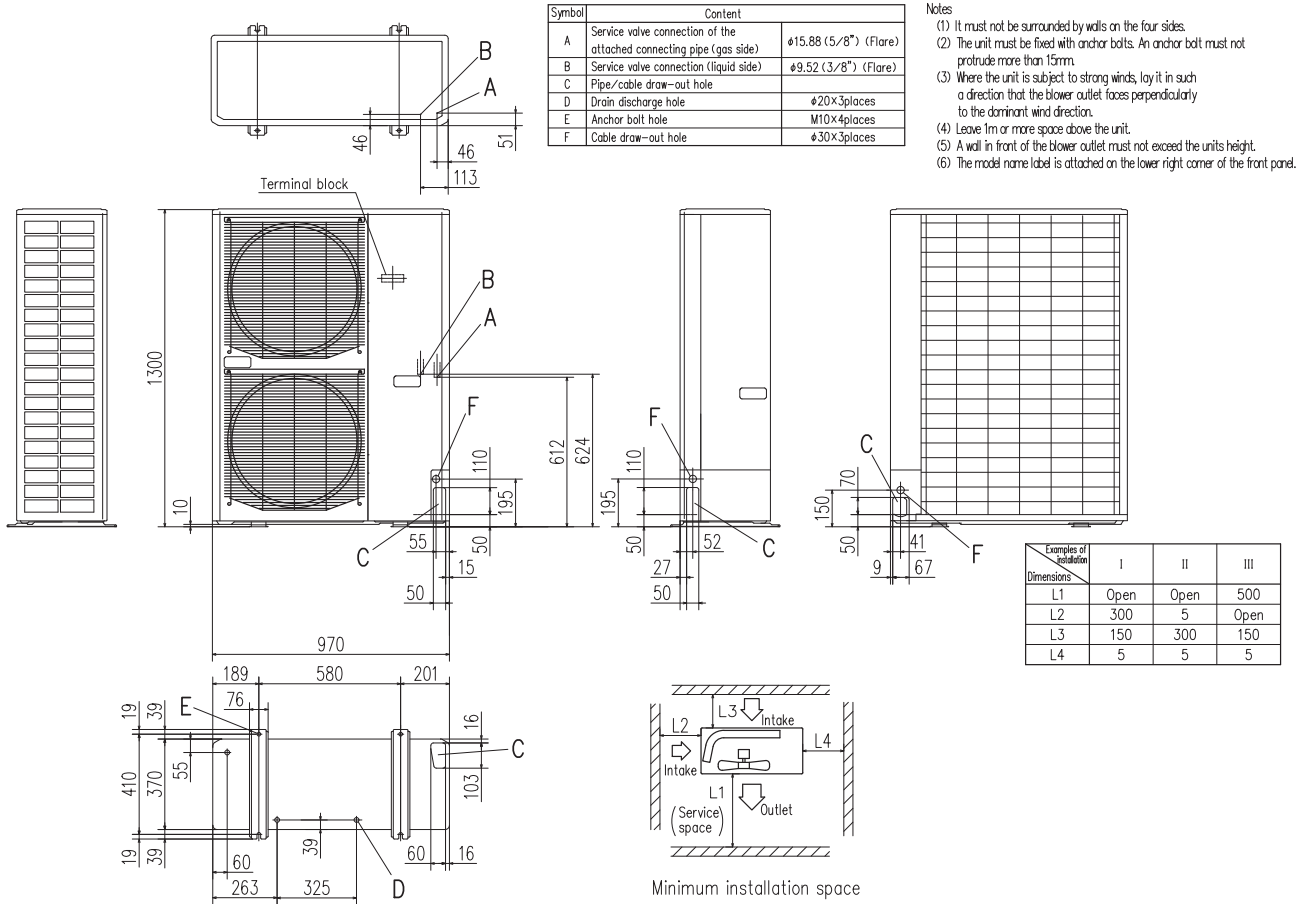

- Notes
- (1) It must not be surrounded by walls on the four sides.
 - (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
 - (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction.
 - (4) Leave 1m or more space above the unit.
 - (5) A wall in front of the blower outlet must not exceed the units height.
 - (6) The model name label is attached on the lower right corner of the front panel.

FDC100VNX, 125VNX, 140VNX, 100VSX, 125VSX, 140VSX

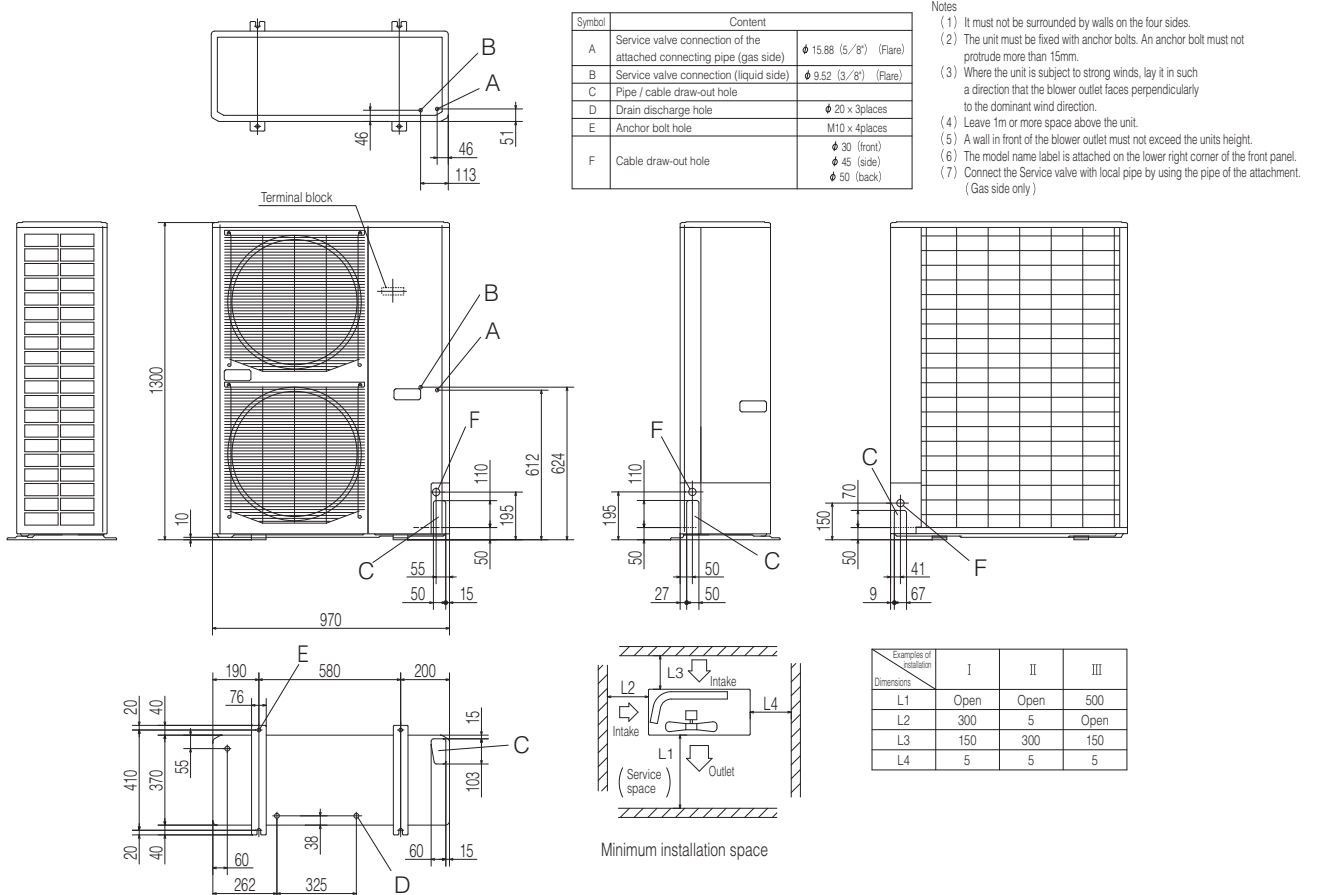


- Notes
- (1) It must not be surrounded by walls on the four sides.
 - (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
 - (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction.
 - (4) Leave 1m or more space above the unit.
 - (5) A wall in front of the blower outlet must not exceed the units height.
 - (6) The model name label is attached on the lower right corner of the front panel.
 - (7) Connect the Service valve with local pipe by using the pipe of the attachment. (Gas side only)

FDC100VNA-W, 125VNA-W, 140VNA-W, 100VSA-W, 125VSA-W, 140VSA-W
 FDC100VNA, 125VNA, 140VNA, 100VSA, 125VSA, 140VSA

Symbol	Content	
A	Service valve connection (gas side)	φ15.88 (5/8") (Flare)
B	Service valve connection (liquid side)	φ9.52 (3/8") (Flare)
C	Pipe/cable draw-out hole	
D	Drain discharge hole	φ20×3places
E	Anchor bolt hole	M10×4places
F	Cable draw-out hole	φ30×3places


- Notes
- (1) It must not be surrounded by walls on the four sides.
 - (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
 - (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction.
 - (4) Leave 1m or more space above the unit.
 - (5) A wall in front of the blower outlet must not exceed the units height.
 - (6) The model name label is attached on the lower right corner of the front panel.

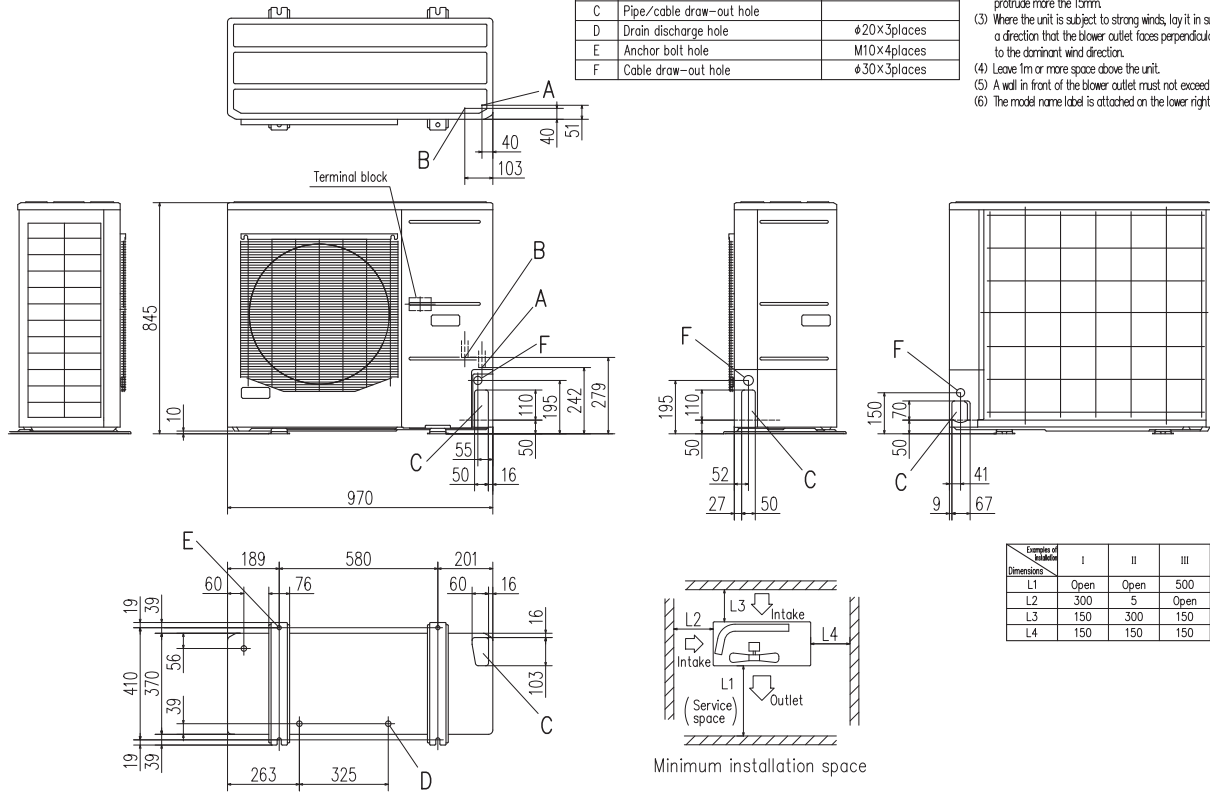

FDC200VSA


Symbol	Content	
A	Service valve connection of the attached connecting pipe (gas side)	φ19.05 (3/4") (Flare)
B	Service valve connection (liquid side)	φ9.52 (3/8") (Flare)
C	Pipe/cable draw-out hole	
D	Drain discharge hole	φ20×3places
E	Anchor bolt hole	M10×4places
F	Cable draw-out hole	φ30 (front) φ30 (side) φ30 (back)

- Notes
- (1) It must not be surrounded by walls on the four sides.
 - (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
 - (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction.
 - (4) Leave 1m or more space above the unit.
 - (5) A wall in front of the blower outlet must not exceed the units height.
 - (6) The model name label is attached on the lower right corner of the front panel.
 - (7) Connect the Service valve with local pipe by using the pipe of the attachment. (Gas side only)
 - (8) Regarding attaching the pipe of accessories, refer to an attached installation manual.

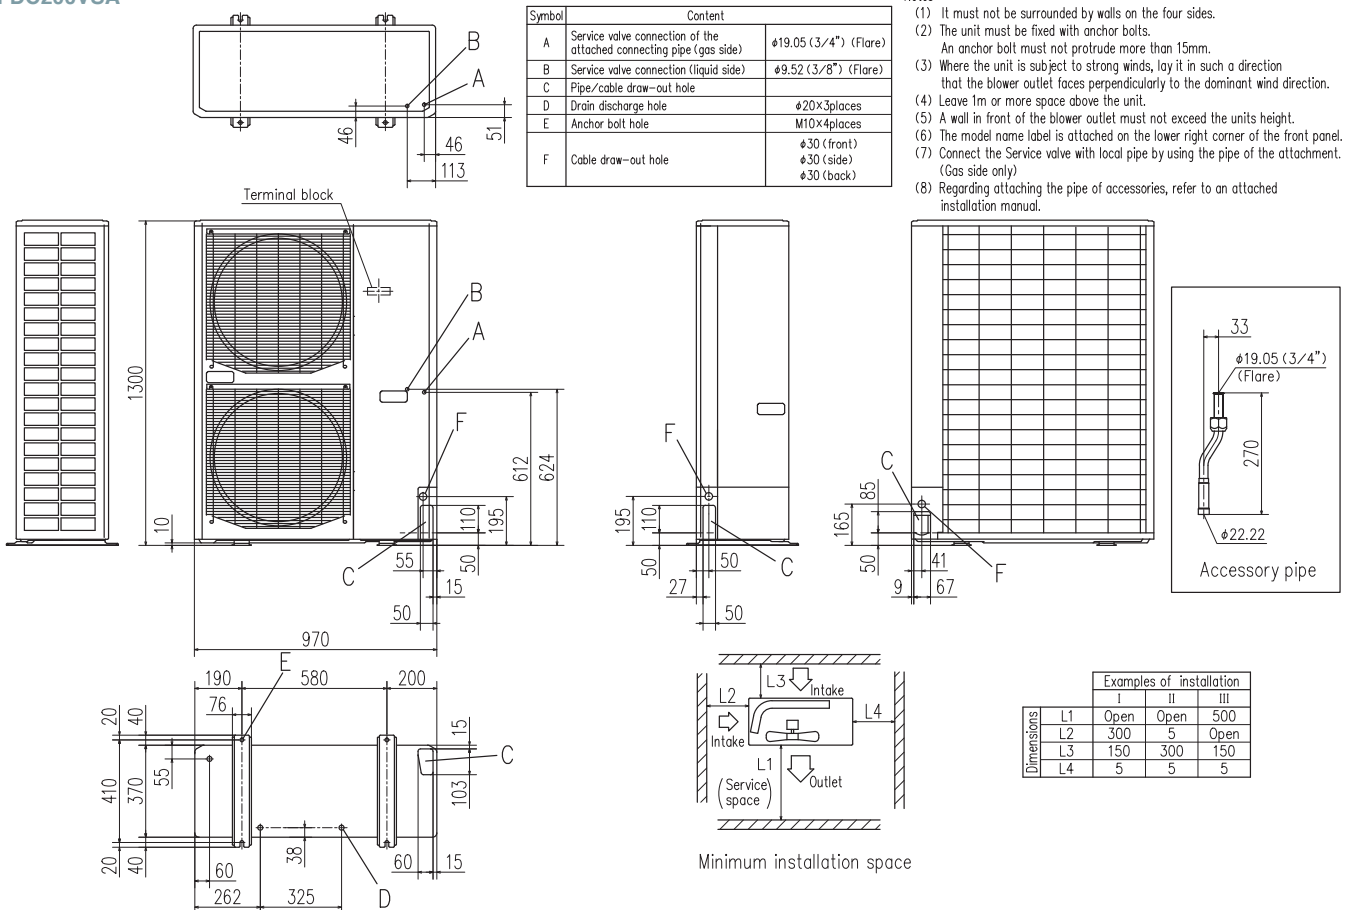


Outdoor Unit Dimensions (Unit:mm)


FDC200VSA-W, 250VSA-W, FDC280VSA-W
FDC250VSA

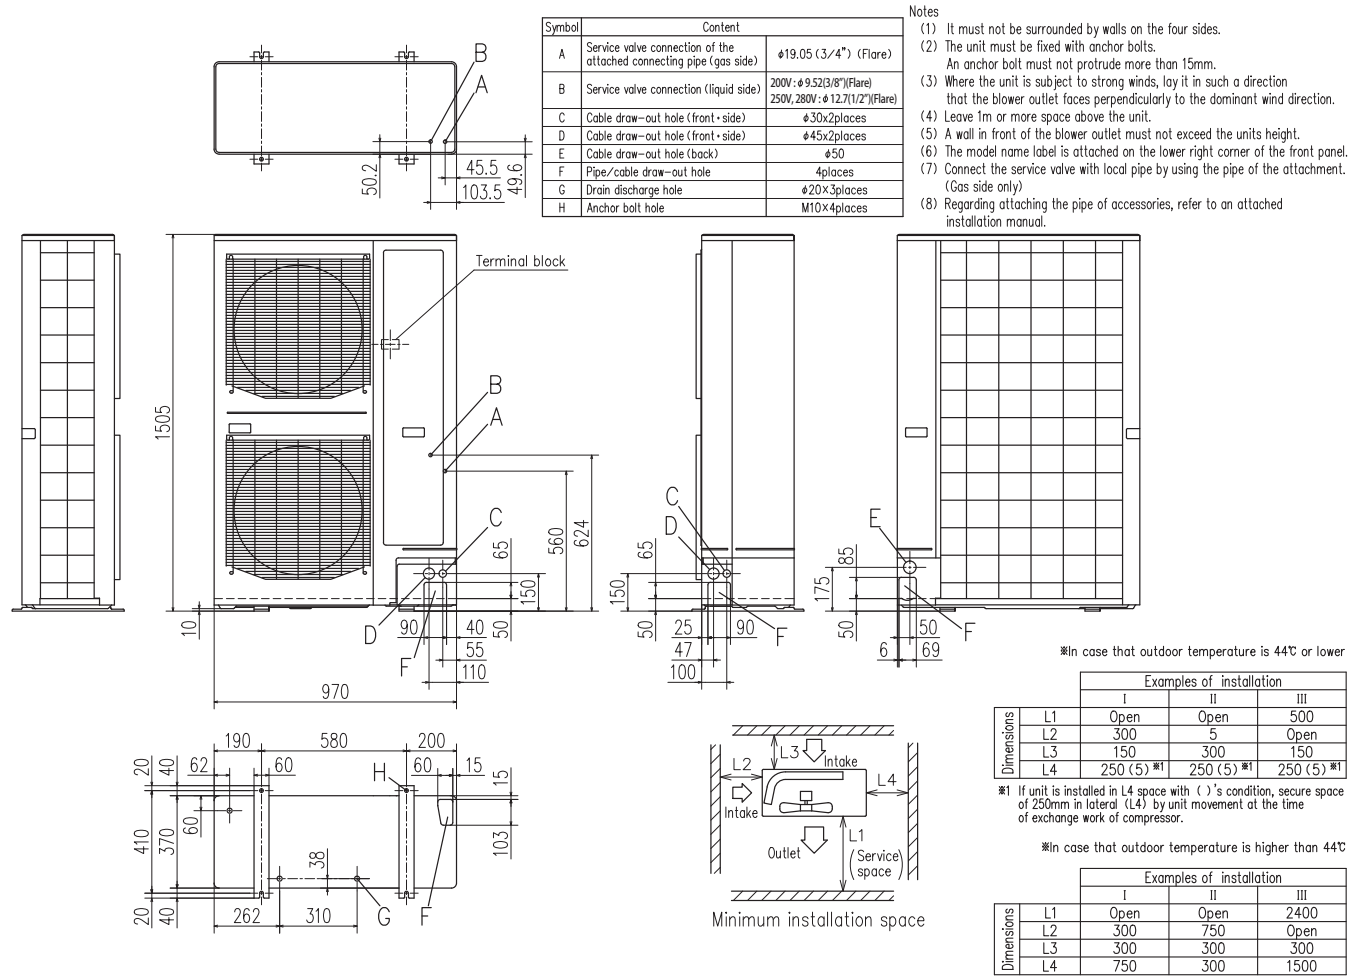

FDC71VNP-W

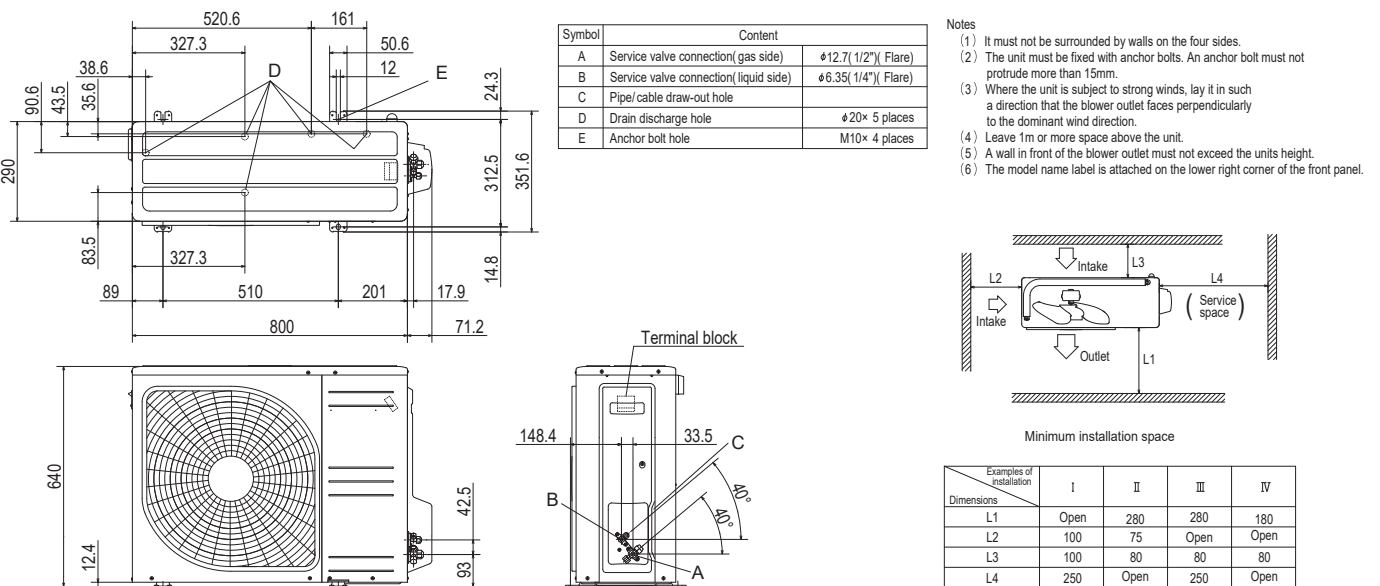


FDC90VNP-W, 100VNP-W

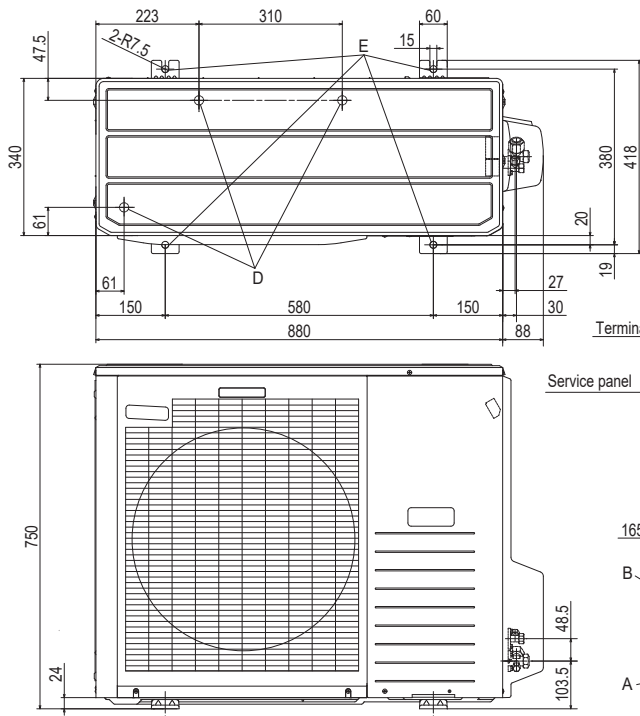

Notes

- (1) It must not be surrounded by walls on four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) Where the unit is subjected to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction.
- (4) Leave 1m or more space above the unit.
- (5) A wall in front of the blower outlet must not exceed the unit's height.
- (6) The model name label is attached on the lower right corner of the front panel.




Minimum installation space

Examples of installation Dimensions	I	II	III
L1	Open	Open	500
L2	300	250	Open
L3	100	150	100
L4	250	250	250

Symbol	Content	
A	Service valve connection (gas side)	φ15.88(5/8") (Flare)
B	Service valve connection (liquid side)	φ6.35(1/4") (Flare)
C	Pipe / cable draw-out hole	
D	Drain discharge hole	φ20 x 3 places
E	Anchor bolt hole	M10 x 4 places


FDC125VNP-W

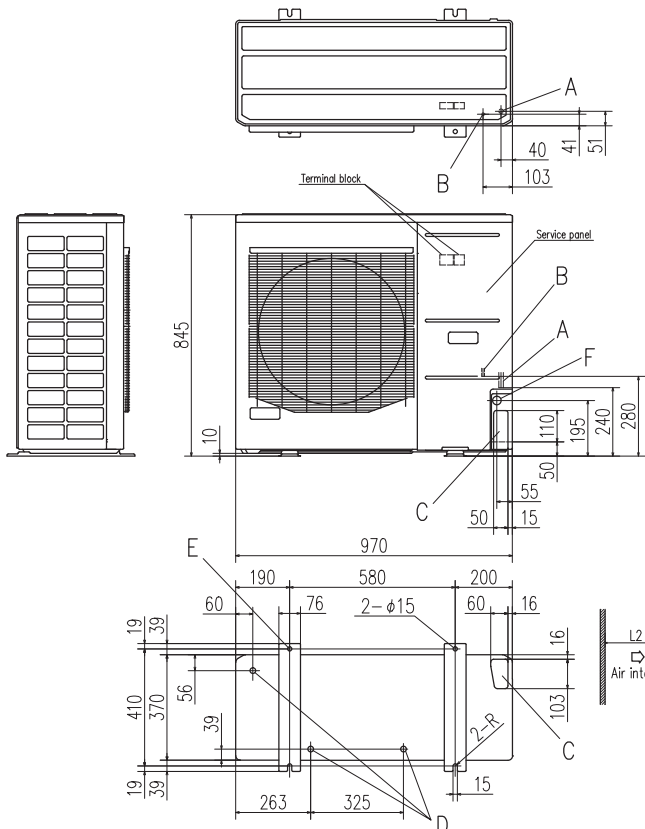


Symbol	Content	
A	Service valve connection (gas side)	φ15.88 (5/8") (Flare)
B	Service valve connection (liquid side)	φ9.52 (3/8") (Flare)
C	Pipe/cable draw-out hole	
D	Drain discharge hole	φ20×3 places
E	Anchor bolt hole	M10×4 places
F	Cable draw-out hole	φ30×3 places

Notes

- (1) It must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet face is perpendicular to the dominant wind direction.
- (4) Leave 1m or more space above the unit.
- (5) A wall in front of the blower outlet must not exceed the unit's height.
- (6) The model name label is attached on the service panel.

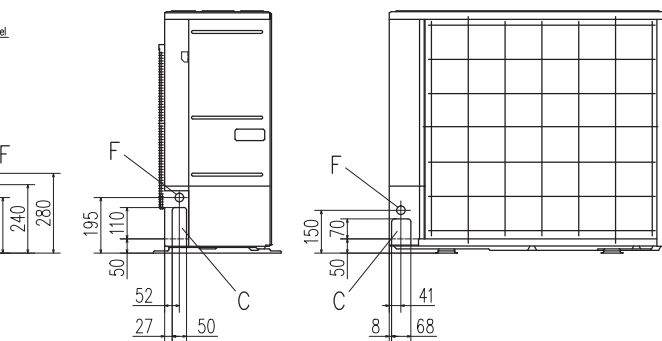

The height of a wall is 1200mm or less



Minimum installation space

Examples of installation Dimensions	I	II	III
L1	Open	Open	500
L2	300	250	Open
L3	100	150	100
L4	250	250	250

Control Systems

Remote Control line up

Wired	Indoor unit	Remote control	Wireless	Indoor unit	Remote control	Indoor unit	Remote control
	All models			RC-EX3D		FDT	RCN-T-5BW-E2 RCN-T-5BB-E2
		RC-E5		FDT	RCN-T-5BW-E2 RCN-T-5BB-E2	FDE	RCN-E-E3
		RC-ES1		FDT	RCN-T-5BW-E2 RCN-T-5BB-E2	FDE	RCN-E-E3
		RCH-E3		FDT	RCN-T-5BW-E2 RCN-T-5BB-E2	FDE	RCN-E-E3
				FDC	RCN-TC-5AW-E3	FDU,FDUM,FD	RCN-KIT4-E2

Wired remote control

Option

RC-EX3D

Intuitive touch controller with Liquid Crystal Display



User friendly

- The industry's first LCD panel with light tap operation has been introduced
- Simple interface with only three buttons

H120 x W120 x D19 mm

Easy view

- Big LCD with 3.8 inch full dot display
- Back light function
- Multi-language display (9 languages)

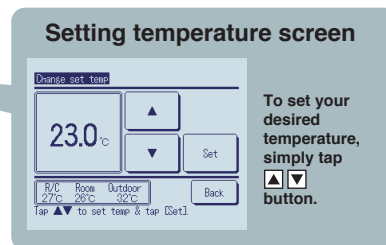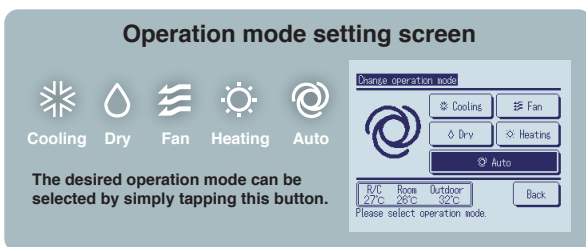

High power operation

- The highest capacity operation (Max 15 minutes)
- Increasing compressor speed
 - Increasing air flow volume

Run / Stop

Energy-saving operation

- Changes set temperature. At 28°C in cooling mode and 22°C in heating mode, 25°C in auto mode.
- Adjustment of operation based on outdoor temperature.

Main functions

	Function name	Description
Economy & Timer	Energy-saving operation	Since the capacity is controlled automatically based on the outdoor temperature, energy can be saved without losing comfort.
	Sleep timer	Specify the start and stop time for the operation. The selectable range of setting time is from 30 to 240 minutes (at 10-minute intervals).
	Set temperature auto return	The temperature automatically returns to the previously set temperature.
	Set ON timer by hour	When the predetermined time is reached, the air-conditioner automatically turns on.
	Set OFF timer by hour	When the predetermined time is reached, the air-conditioner automatically turns off.
	Set ON timer by clock	The air-conditioner turns on at the set time.
	Set OFF timer by clock	The air-conditioner turns off at the set time.
	Weekly timer	On or Off timer can be set on a weekly basis.
	Peak-cut timer	Capacity control can be set by using peak cut function on RC-EX3D for better energy saving. Five-step capacity control is available.
	Home leave operation	When the unit is not used for a long period, the room temperature is maintained at a moderate level, avoiding extremely hot or cool temperatures.
	Comfort	Big LCD & Touch screen panel
Easy modification of individual flap control		User can visually confirm and set the direction of flap using the visual display on the remote control.
Automatic fan speed *1		The micro-computer automatically adjusts the airflow effectively to follow the changes of return air temperature.
Temp increment setting		Temperature increments for changes in the set temperature can be adjusted.
Silent mode		Set the period of time to operate the Outdoor unit with prioritizing the quietness.

	Function name	Description
Convenience	Function switch *1	The function switch allows user to select and set two functions among available functions.
	Favourite setting *1	Operation mode, set temperature, fan speed and air flow direction automatically adjust to the programmed favourite setting.
	Adjusting Brightness of the operation lamp	The brightness of the background light can be adjusted by 10 stages.
	LCD contrast setting	This function allows user to adjust LCD display contrast.
	High power operation	High Power Mode increases the unit operating ability for 15 minutes to quickly adjust the room temperature to a comfortable level.
	Back light setting	This convenient function allows user to see controls under low light conditions.
	Administrator settings	This function only allows specific individuals to operate the unit.
	Setting temp range	Limited range of setting temperature in the heating or the cooling operation can be selected.
	External Input / Output Function	The external input/output of indoor unit by remote controller can set input/output based on user needs.
	Select the language	Set the language to be displayed on the remote control.
	Service	USB connection (mini-B)
Error code display		This function allows user to check information displayed when abnormal function of the unit occurs.
Operation data display		Displays various types of air-conditioner operation data in real time.
Contact company display		Address of the service contact is displayed.
Filter sign		Announces the due time for cleaning of the air filter.
Static pressure adjustment		Allows user to adjust duct static pressure using the remote control.
Backup Control		Allows for rotation control, fault backup control, and capacity backup control.

*1 Cannot be used when a centralized control remote is connected.

Wired remote control

Option

RC-E5



H120 x W120 x D19 mm

- Weekly timer function as standard
- Timer operation
- Run hour meters to facilitate maintenance checking
- Room temperature controlled by the remote control sensor
- Adjustable set temperature ranges

The RC-E5 control enables extensive access to service and maintenance technical data combined with easy to use functions and a clear LCD display.

Design remote control

Option

RC-ES1 (Wired) **New!**



H86 x W86 x D17 mm

- Simple and sophisticated design
- Compact size (86x86mm)
- Remote control with Bluetooth® wireless technology

Wireless connection



Remote control with Bluetooth® wireless technology. Easy set-up of indoor units. Notifications of abnormal conditions or operational data from the remote control will be sent to your smartphone.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by MITSUBISHI HEAVY INDUSTRIES THERMAL SYSTEMS, LTD. is under license.

Simple remote control

Option

RCH-E3 (Wired)



H120 x W70 x D15 mm

Designed specially for hotel rooms, the controller's buttons are limited only to the minimum required functions such as ON/OFF, mode, temperature setting and fan speed. It is really simple and easy to use.

* RCH-E3 is not applicable to the Individual flap control system. When RCH-E3 is used, the fan has 3 speed settings (Hi-Me-Lo) only.

AUTO restart

This function allows starting the air conditioner automatically when power supply is restored after power failure or by turning on the power switch.

Up to 16 units

It can control up to 16 indoor units, by pressing the AIR CON No. button.

Wireless remote control

Option

RCN-T-5BW-E2 RCN-T-5BB-E2



For wireless control simply insert the infrared receiver kit on a corner of the panel.

* Wireless remote control is not applicable to the Individual flap control system.

RCN-TC-5AW-E3



RCN-KIT4-E2



RCN-E-E3



Thermistor

Option

SC-THB-E3




In case the sensor integrated in the indoor unit or in the remote controller is unable to sense the room temperature correctly, or an individual controller in each room is not required but a temperature sensor is (as when a central control system is in place), install SC-THB-E3 in an adequate location in the room.

Air Handling Unit Interface


AHU-KIT-SP2

The AHU controller will function as an interface between MHI's PAC outdoor units and locally produced heat exchanger for Air Handling Unit (AHU).

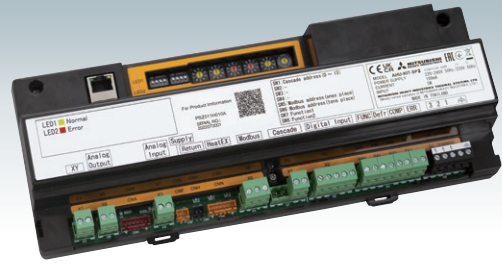

- Compact AHU interface for MHI's Split system
- Modbus connection
- 0-10V/4-20mA capacity control
- Cascade control
- Various external I/O
- Set temperature control

Main components

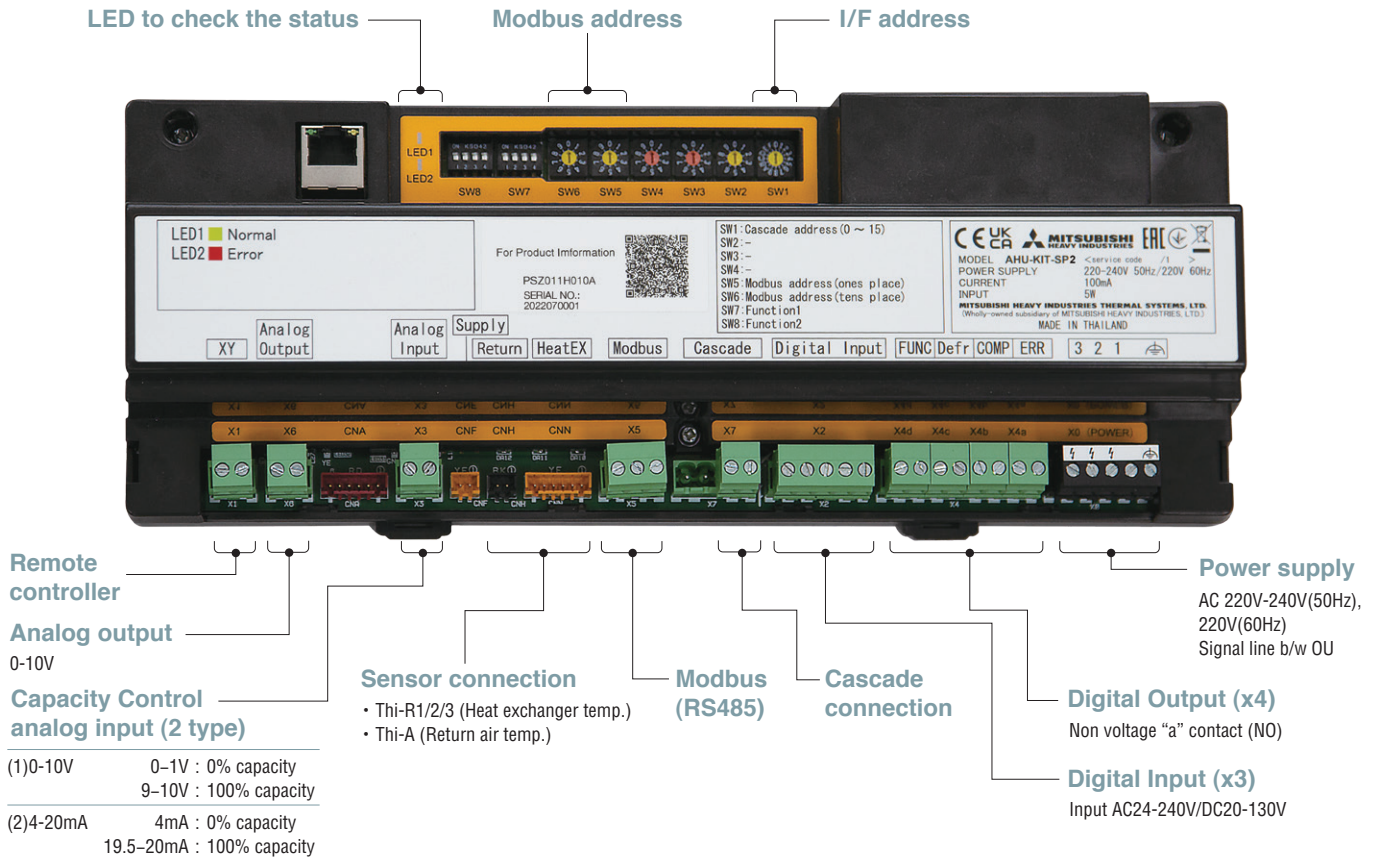

Main functions

Model	AHU-KIT-SP2	
Size	W290 x H109.5x D57mm	
External Input	Capacity control	○
	Cooling / Heating	○
	Operation On/Off	○
	Emergency stop	○
External Output	Comp On/Off	○
	Run/Stop	○
	Defrost On/Off	○
	Error	○
Modbus (RS-485)	○	
Cascade connection	○ Max 16	
Standard	EN60335-1	

Compatibility PAC & RAC outdoor unit will be in scope.


Capacity	R32	R410A
Small	SRC40/50/60ZSX-W1,W3	—
	FDC71VNX-W	—
Medium	FDC100/125/140VNA-W	FDC100/125/140VNA
	FDC100/125/140VSA-W	FDC100/125/140VSA
	FDC100/125/140VNX-W	FDC100/125/140VNX
	FDC100/125/140VSX-W	FDC100/125/140VSX
Large	FDC200/250/280VSA-W	FDC200/250VSA

System Examples & Advantages

Ex1. General AHU

- 0-10V/4-20mA capacity control
- Various I/O for better control
- R/C can be removed


Compatible with market standard AHU controller.
Provide wide flexibility for AHU solution.

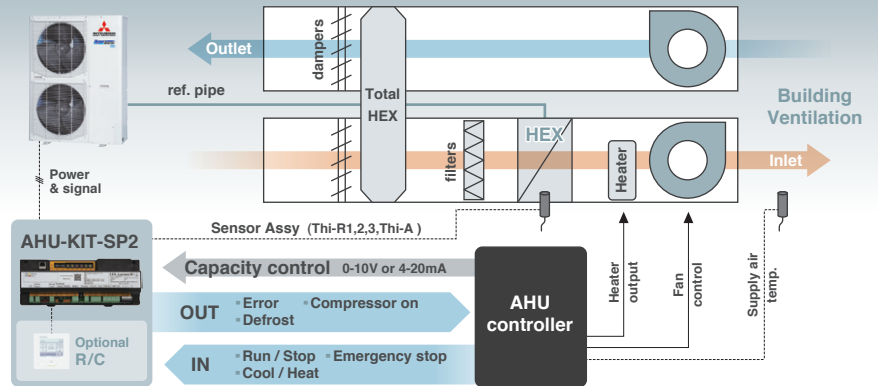

Ex2. Modbus AHU

- Modbus connection
- Same control as external I/O


BMS connectability without any extra device.

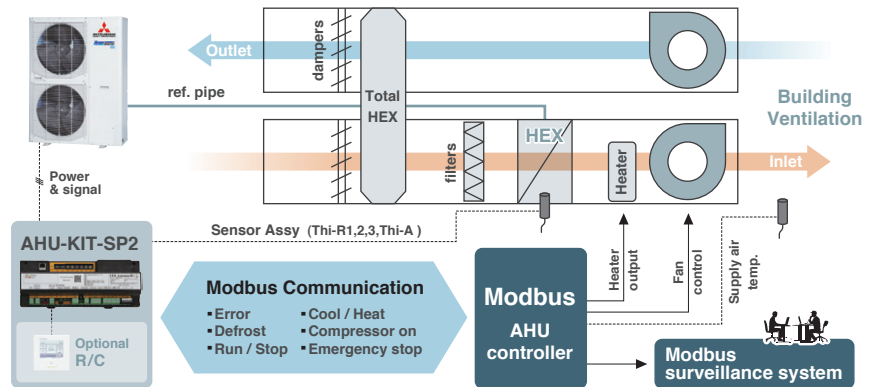

Ex3. Simple AHU


- Remote controller connection
- Adequate external input/output

Simple stand-alone AHU control by set temperature control from RC.

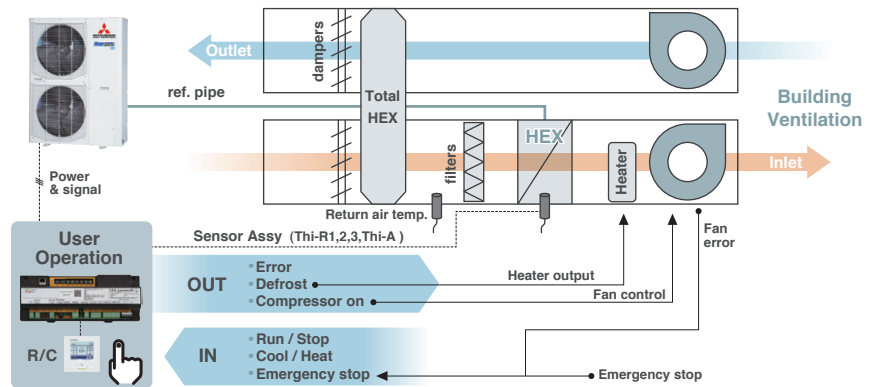


Ex4. Big capacity AHU

Cascade control provides wide range of AHU capacity with small footprint. Multiple outdoor unit increase system reliability and efficiency.

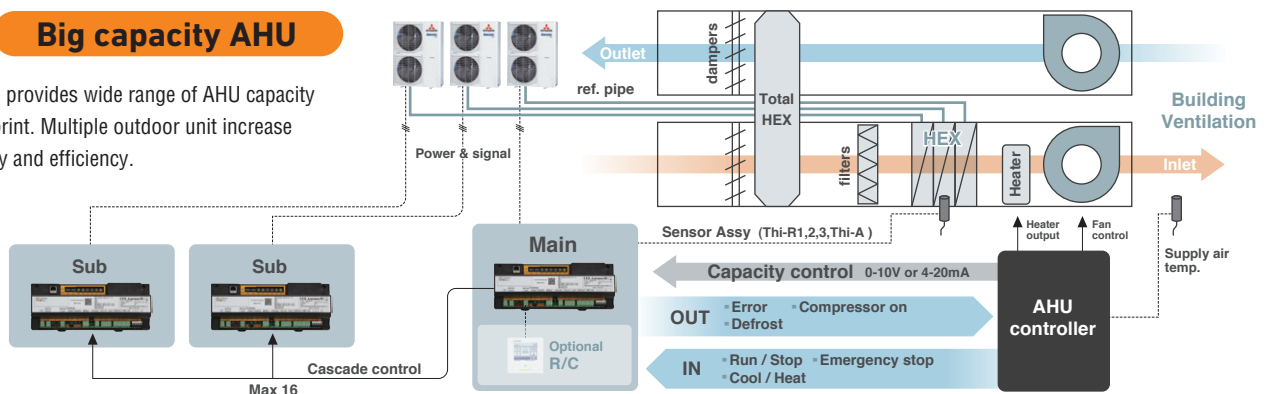

SUPERLINK-II

- Control Systems -

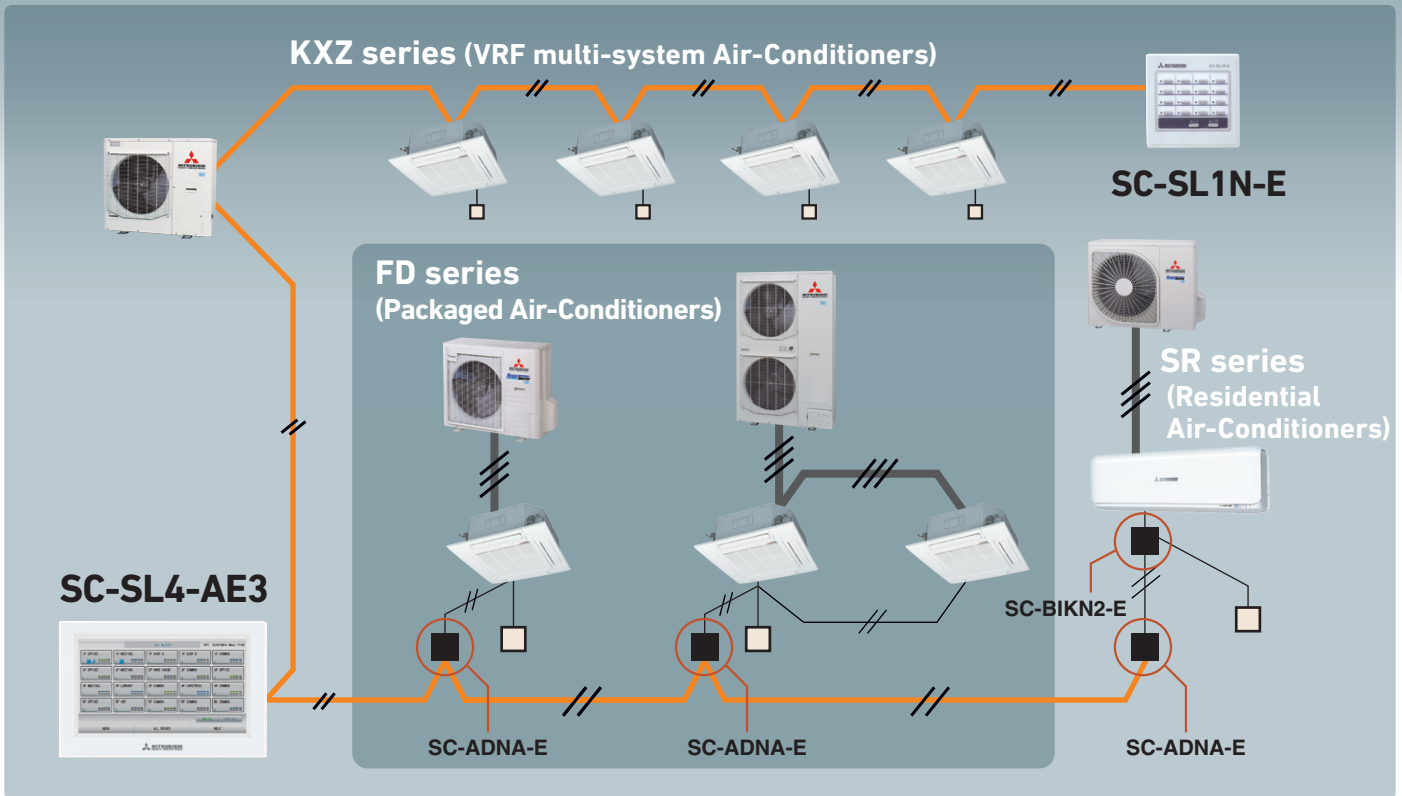


Central Control




SC-SL1N-E

Start/stop control of up to 16 indoor units is possible either individually or collectively. With simple operations, you can achieve centralized control.

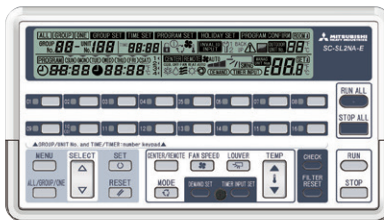

SC-SL2NA-E

Centralized control of up to 64 indoor units. Including weekly timer function as standard.

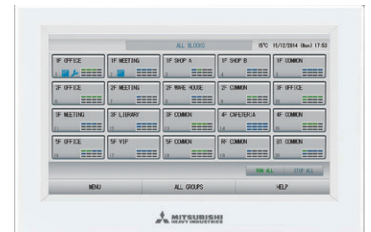

SC-SL4-AE3,-BE3

Easy operation thanks to with a large colour LCD and touch panel. Up to 128 indoor units can be controlled, when SUPERLINK-II systems are connected.

Building Management Systems

Production by order



SC-WBGW256*

WEB & BACnet Gateway

SC-WBGW256, up to 256 cells (some cells can have two or more indoor units and total number of indoor units can be up to 256 units) are controlled from the Internet Explorer and centrally from Building Management Systems.

Users can manage up to 1024 units by connecting the four devices !!


* Additional engineering service is required. Please consult your dealer when using these system.

SUPERLINK E BOARD (SC-ADNA-E)


This board is used when conducting control of the single package (wired remote control unit) 1-type series using a network option (SC-SL1N-E, SC-SL2NA-E, etc).

- (1) Functions**
- (a) Transmits the settings from the network option to the indoor units.
 - (b) Returns the priority indoor unit data in response to a data request from the network option.
 - (c) Inspects the error status of connected indoor units and transmits the inspection codes to the network option.
 - (d) A maximum of 16 units can be controlled (if in the same operation mode).


(2) Wiring connection diagram

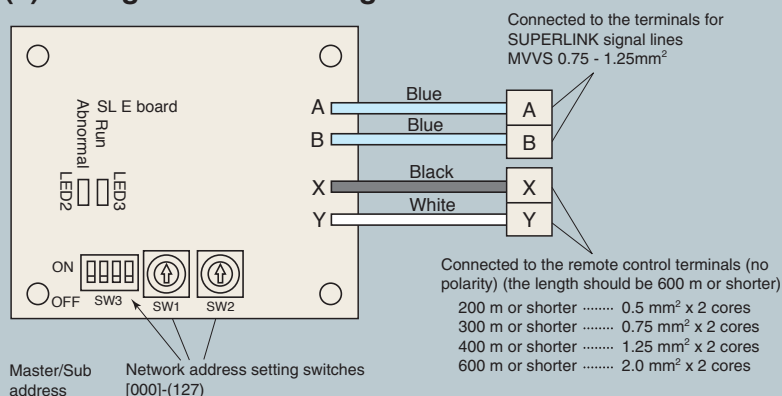


(3) Metal box dimension (unit:mm)

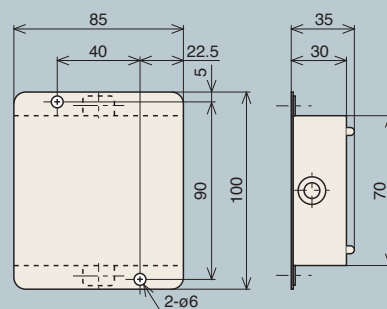

Basic Connections




Plural Controls by Multiple Remote Controls. Mixture of Multiple Units




- Transmit the information of plural "Master" units to the network.
- Transmit the abnormalities of the "Slave" units to the network.
- ▶ Setting the plural "Master/Slave" units with the dip SW of the printed circuit board.
- ▶ Setting the "Master/Slave" remote controls with the dip SW of the remote control board.


Plural Controls by Multiple Remote Controls. Mixture of Multiple Units

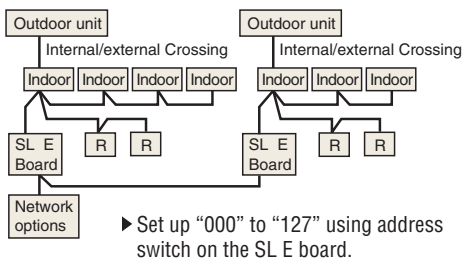

Without Remote Control

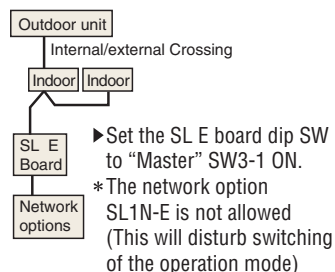


Wireless Kit



External switch connection CNT, CNTA

All indoor units are equipped with an additional connection point CnT to connect indoor units to an external ON/OFF switch; e.g. time clock, fire alarm, etc.




Energy Efficient and Environmentally Conscious

Several radical design changes and engineering developments have brought about a vast improvement in energy efficiency and environmental protection.

ENERGY LABEL

SEER and SCOP is defined in European regulations listed below.

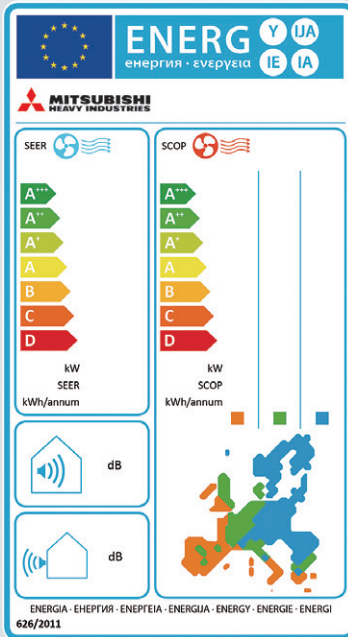

No.626/2011 of 4 May 2011:
energy labeling of air-conditioners
(below cooling capacity 12kW).

No.206/2012 of 6 March 2012:
requirement for air-conditioners and comfort fans.

Seasonal efficiency is the method of rating the true efficiency of heating and cooling products over an entire year.

Set by the EU's new regulation implementing Eco-Design Directive for Energy related Product (ErP) which specifies the minimum efficiency of air-conditioners manufacturers must integrate into their products.

The Seasonal Efficiency rating system that must be used for heating and cooling by all manufacturers are;

SEER - Seasonal Efficiency Ratio (value in cooling)
SCOP - Seasonal Coefficient of Performance (value in heating)

The new rating system will indicate the true efficiency of the energy using product at specified condition.

Employment of lead-free solder

Adapted to RoHS directive

RoHS:Restriction of Hazardous substances

In order to avoid the release of hazardous substances into the environment, all models have utilised lead-free solder application. It has been considered to be difficult to use lead-free solder for practical applications because it requires higher solder temperatures at assembly, which can jeopardize reliability. However our PbF soldering method can produce a higher quality lead-free printed circuit board.

Employment of R32 R410A

All models use refrigerant R32 or R410A characterized by the ozone depletion coefficient being 0.

Excellent Energy Saving

High performance and excellent energy savings are achieved at the same time by heat exchanger's increased capacity and employment of high efficiency DC motor.

Indoor unit	FDT40VH	FDT50VH	FDT60VH	FDT71VH	FDT100VH	FDT100VH	FDT40VHx2	FDT50VHx2	
Outdoor unit	SRC40ZSX-W1	SRC50ZSX-W3	SRC60ZSX-W3	FDC71VNX-W	FDC100VNX-W	FDC100VNX-W	FDT71VNX-W	FDC100VNX-W	
Energy class (cooling/heating)	A+++/A++	A++/A++	A+++/A++	A++/A++	A+/A+	A+/A+	A+++/A++	A++/A+	
SEER	8.63	7.93	8.74	7.60	8.00	8.00	7.60	8.24	
SCOP (Average climate)	4.62	4.63	5.00	4.61	4.44	4.44	4.66	4.24	
Pdesign (cooling/heating (@-10°C))	kW	4.0/3.9	5.0/4.0	5.6/5.2	7.1/5.8	10.0/11.2	10.0/11.2	7.1/5.8	10.0/11.2
Annual electricity consumption (cooling/heating)	kWh/a	163/1167	221/1210	225/1455	327/1762	438/3534	438/3534	327/1742	425/3700
Refrigerant	GWP	R32/675			R32/675		R32/675		
	charge kg/CO ₂ e	1.30/0.878			2.75/1.86		4.0/2.7		
Designated heating season	Average								
Indoor unit	FDT50VHx2	FDT100VH	FDT100VH	FDT40VHx2	FDT50VHx2	FDT50VHx2	FDT100VH	FDT100VH	
Outdoor unit	FDC100VNX-W	FDC100VNX	FDC100VNX	FDC71VNX	FDC100VNX	FDC100VNX	FDC100VNA-W	FDC100VNA-W	
Energy class (cooling/heating)	A++/A+	A+/A+	A+/A+	A+/A+	A+/A+	A+/A+	A+++/A++	A++/A++	
SEER	8.24	5.90	5.90	5.77	5.92	5.92	7.13	7.13	
SCOP (Average climate)	4.24	4.32	4.32	4.34	4.16	4.16	4.60	4.60	
Pdesign (cooling/heating (@-10°C))	kW	10.0/11.2	10.0/11.2	10.0/11.2	7.1/5.8	10.0/11.2	10.0/11.2	10.0/8.5	10.0/8.5
Annual electricity consumption (cooling/heating)	kWh/a	425/3700	594/3634	594/3634	431/1873	592/3772	592/3772	491/2590	491/2590
Refrigerant	GWP	R32/675			R410A/2088		R32/675		
	charge kg/CO ₂ e	4.0/2.7			4.5/9.396		3.3/2.228		
Designated heating season	Average								
Indoor unit	FDT50VHx2	FDT50VHx2	FDT100VH	FDT100VH	FDT50VHx2	FDT50VHx2	FDT71VH	FDT100VH	
Outdoor unit	FDC100VNA-W	FDC100VSA-W	FDC100VNA	FDC100VSA	FDC100VNA	FDC100VSA	FDC71VNP-W	FDC90VNP-W	
Energy class (cooling/heating)	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	
SEER	7.41	7.41	6.78	6.78	6.89	6.89	6.34	7.10	
SCOP (Average climate)	4.47	4.47	4.52	4.52	4.47	4.47	4.38	4.56	
Pdesign (cooling/heating (@-10°C))	kW	10.0/8.5	10.0/8.5	10.0/8.5	10.0/8.5	10.0/8.5	7.10/5.70	9.0/6.0	
Annual electricity consumption (cooling/heating)	kWh/a	473/2665	473/2665	516/2633	516/2633	508/2665	508/2665	393/1822	444/1842
Refrigerant	GWP	R32/675		R410A/2088			R32/675		
	charge kg/CO ₂ e	3.3/2.228		3.8/7.934			1.30/0.878		1.70/1.148
Designated heating season	Average								

• Refrigerant contained in the products is a fluorinated greenhouse gas listed in Regulation (EU) No 517/2014.
 • SEER/SCOP are based on EN14825.2016 and Commission regulation(EU) No.2016/2281. Temperature conditions for calculating SCOP are based on "Average climate".
 • 'tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.

Indoor unit		FDT100VH
Outdoor unit		FDC100VNP-W
Energy class (cooling/heating)		A++/A+
SEER		7.08
SCOP (Average climate)		4.53
Pdesign (cooling/heating (@-10°C))	kW	10.0/6.4
Annual electricity consumption (cooling/heating)	kWh/a	495/1977
Refrigerant	GWP	R32/675
	charge kg/TCO _{Eq}	1.70/1.148
Designated heating season		Average

Indoor unit		FDTC40VH	FDTC50VH	FDTC60VH	FDTC40VHx2	FDTC50VHx2	FDTC50VHx2	FDTC50VHx2	FDTC50VHx2	
Outdoor unit		SRC40ZSX-W1	SRC50ZSX-W3	SRC60ZSX-W3	FDC71VNX-W	FDC100VNX-W	FDC100VNX-W	FDC100VNX	FDC100VNX	
Energy class (cooling/heating)		A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A/A	A/A	
SEER		6.94	6.52	6.45	6.70	6.58	6.58	5.56	5.56	
SCOP (Average climate)		4.37	4.30	4.10	4.40	4.16	4.16	3.87	3.87	
Pdesign (cooling/heating (@-10°C))	kW	4.0/4.0	5.0/4.3	5.6/5.1	7.1/6.0	10.0/11.2	10.0/11.2	10.0/10.8	10.0/10.8	
Annual electricity consumption (cooling/heating)	kWh/a	202/1283	269/1401	304/1744	371/1911	532/3772	532/3772	630/3910	630/3910	
Refrigerant	GWP	R32/675							R410A/2088	
	charge kg/TCO _{Eq}	1.30/0.878			2.75/1.86		4.0/2.7		4.5/9.396	
Designated heating season		Average								

Indoor unit		FDTC50VHx2	FDTC50VHx2	FDTC50VHx2	FDTC50VHx2
Outdoor unit		FDC100VNA-W	FDC100VSA-W	FDC100VNA	FDC100VSA
Energy class (cooling/heating)		A++/A+	A++/A+	A+/A+	A+/A+
SEER		6.17	6.17	6.00	6.00
SCOP (Average climate)		4.38	4.38	4.38	4.38
Pdesign (cooling/heating (@-10°C))	kW	10.0/8.5	10.0/8.5	10.0/8.4	10.0/8.4
Annual electricity consumption (cooling/heating)	kWh/a	567/2715		584/2682	584/2682
Refrigerant	GWP	R32/675		R410A/2088	
	charge kg/TCO _{Eq}	3.3/2.228		3.8/7.934	
Designated heating season		Average			

Indoor unit		FDU71VH	FDU100VH	FDU100VH	FDU100VH	FDU100VH	FDU100VH	FDU100VH	FDU100VH
Outdoor unit		FDC71VNX-W	FDC100VNX-W	FDC100VNX-W	FDC100VNX	FDC100VNX	FDC100VNA-W	FDC100VSA-W	FDC100VNA
Energy class (cooling/heating)		A++/A+	A++/A+	A++/A+	A/A+	A/A+	A++/A+	A++/A+	A++/A+
SEER		6.89	6.29	6.29	5.22	5.19	6.11	6.11	6.11
SCOP (Average climate)		4.47	4.13	4.13	4.10	4.10	4.19	4.19	4.19
Pdesign (cooling/heating (@-10°C))	kW	7.1/6.0	10.0/11.2	10.0/11.2	10.0/13.0	10.0/13.0	10.0/8.5	10.0/8.5	10.0/8.5
Annual electricity consumption (cooling/heating)	kWh/a	361/1878	557/3800	557/3800	670/4441	675/4443	574/2843	574/2843	573/2844
Refrigerant	GWP	R32/675			R410A/2088		R32/675		R410A/2088
	charge kg/TCO _{Eq}	2.75/1.86		4.0/2.7		4.5/9.396		3.3/2.228	
Designated heating season		Average							

Indoor unit		FDU100VH	FDU71VH	FDU100VH	FDU100VH
Outdoor unit		FDC100VSA	FDC71VNP-W	FDC90VNP-W	FDC100VNP-W
Energy class (cooling/heating)		A++/A+	A+/A+	A++/A+	A++/A+
SEER		6.11	5.86	6.66	6.11
SCOP (Average climate)		4.19	4.12	4.22	4.13
Pdesign (cooling/heating (@-10°C))	kW	10.0/8.5	7.10/5.70	9.0/6.0	10.0/6.4
Annual electricity consumption (cooling/heating)	kWh/a	573/2844	425/1937	474/1990	573/2169
Refrigerant	GWP	R410A/2088		R32/675	
	charge kg/TCO _{Eq}	3.8/7.934		1.3/0.878	
Designated heating season		Average			

Indoor unit		FDUM40VH	FDUM50VH	FDUM60VH	FDUM71VH	FDUM100VH	FDUM100VH	FDUM40VHx2	FDUM50VHx2
Outdoor unit		SRC40ZSX-W1	SRC50ZSX-W3	SRC60ZSX-W3	FDC71VNX-W	FDC100VNX-W	FDC100VNX-W	FDC71VNX-W	FDC100VNX-W
Energy class (cooling/heating)		A++/A	A+/A	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A
SEER		6.11	5.82	6.43	6.89	6.29	6.29	6.38	6.36
SCOP (Average climate)		3.81	3.89	4.37	4.45	4.13	4.13	4.15	3.88
Pdesign (cooling/heating (@-10°C))	kW	4.0/3.0	5.0/3.7	5.6/4.7	7.1/6.0	10.0/11.2	10.0/11.2	7.1/6.0	10.0/10.0
Annual electricity consumption (cooling/heating)	kWh/a	230/1102	301/1332	305/1508	361/1878	557/3800	557/3800	390/2025	550/3605
Refrigerant	GWP	R32/675							
	charge kg/TCO _{Eq}	1.30/0.878			2.75/1.86		4.0/2.7		2.75/1.86
Designated heating season		Average							

Indoor unit		FDUM50VHx2	FDUM100VH	FDUM100VH
Outdoor unit		FDC100VNX-W	FDC100VNX	FDC100VNX
Energy class (cooling/heating)		A++/A	A/A+	A/A+
SEER		6.36	5.22	5.19
SCOP (Average climate)		3.88	4.10	4.10
Pdesign (cooling/heating (@-10°C))	kW	10.0/10.0	10.0/13.0	10.0/13.0
Annual electricity consumption (cooling/heating)	kWh/a	550/3605	670/4441	675/4444
Refrigerant	GWP	R32/675		
	charge kg/TCO _{Eq}	4.0/2.7		
Designated heating season		Average		

Energy Efficient and Environmentally Conscious

Indoor unit	FDM50VHx2	FDM50VHx2	FDM100VH	FDM100VH	FDM50VHx2	FDM50VHx2	FDM100VH	FDM100VH
Outdoor unit	FDC100VNX	FDC100VXS	FDC100VNA-W	FDC100VSA-W	FDC100VNA-W	FDC100VSA-W	FDC100VNA	FDC100VSA
Energy class (cooling/heating)	A/A	A/A	A++/A+	A++/A+	A+/A+	A+/A+	A++/A+	A++/A+
SEER	5.14	5.11	6.11	6.11	5.82	5.82	6.11	6.11
SCOP (Average climate)	3.88	3.87	4.19	4.19	4.00	4.00	4.19	4.19
Pdesign (cooling/heating (@-10°C))	kW	10.0/10.0	10.0/10.0	10.0/8.5	10.0/8.5	10.0/8.5	10.0/8.5	10.0/8.5
Annual electricity consumption (cooling/heating)	kWh/a	681/3606	685/3618	574/2843	574/2843	602/2974	573/2844	573/2844
Refrigerant	GWP	R410A/2088			R32/675			R410A/2088
	charge kg/TCO ₂ e	4.5/9.396			3.3/2.228			3.8/7.934
Designated heating season	Average							

Indoor unit	FDM50VHx2	FDM50VHx2	FDM71VH	FDM100VH	FDM100VH
Outdoor unit	FDC100VNA	FDC100VSA	FDC71VNP-W	FDC90VNP-W	FDC100VNP-W
Energy class (cooling/heating)	A/A	A/A	A+/A+	A++/A+	A++/A+
SEER	5.50	5.50	5.86	6.65	6.11
SCOP (Average climate)	3.94	3.94	4.12	4.22	4.13
Pdesign (cooling/heating (@-10°C))	kW	10.0/8.5	10.0/8.5	7.10/5.70	9.0/6.0
Annual electricity consumption (cooling/heating)	kWh/a	637/3024	637/3024	425/1937	474/1990
Refrigerant	GWP	R410A/2088		R32/675	
	charge kg/TCO ₂ e	3.8/7.934		1.7/1.148	
Designated heating season	Average				

Indoor unit	SRK71ZR-W(F)	SRK100ZR-W(F)	SRK100ZR-W(F)	SRK50ZSX-Wx2	SRK50ZSX-Wx2	SRK50ZSX-Wx2	SRK50ZSX-Wx2	SRK100ZR-W(F)
Outdoor unit	FDC71VNX-W	FDC100VNX-W	FDC100VXS-W	FDC100VNX-W	FDC100VXS-W	FDC100VNX	FDC100VXS	FDC100VNA-W
Energy class (cooling/heating)	A++/A+	A++/A	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+
SEER	6.80	6.54	6.54	7.66	7.66	6.11	6.11	6.13
SCOP (Average climate)	4.56	4.01	4.01	4.25	4.25	4.16	4.16	4.33
Pdesign (cooling/heating (@-10°C))	kW	7.1/5.8	10.0/10.5	10.0/10.5	10.0/11.2	10.0/11.2	10.0/10.4	10.0/8.5
Annual electricity consumption (cooling/heating)	kWh/a	366/1782	535/3671	535/3671	457/3691	457/3691	574/3504	571/2746
Refrigerant	GWP	R32/675			R410A/2088			R32/675
	charge kg/TCO ₂ e	2.75/1.86	4.0/2.7		4.5/9.396			3.3/2.228
Designated heating season	Average							

Indoor unit	SRK100ZR-W(F)	SRK50ZSX-Wx2	SRK50ZSX-Wx2	SRK100ZR-W	SRK100ZR-W	SRK71ZR-W(F)	SRK100ZR-W(F)
Outdoor unit	FDC100VSA-W	FDC100VNA-W	FDC100VSA-W	FDC100VNA	FDC100VSA	FDC71VNP-W	FDC100VNP-W
Energy class (cooling/heating)	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+
SEER	6.13	7.05	7.05	6.26	6.26	6.75	6.11
SCOP (Average climate)	4.33	4.47	4.47	4.33	4.33	4.55	4.14
Pdesign (cooling/heating (@-10°C))	kW	10.0/8.5	10.0/8.5	10.0/8.5	10.0/8.5	7.10/5.70	9.6/6.0
Annual electricity consumption (cooling/heating)	kWh/a	571/2746	497/2661	497/2661	560/2750	560/2750	369/1756
Refrigerant	GWP	R32/675		R410A/2088		R32/675	
	charge kg/TCO ₂ e	3.3/2.228		3.8/7.934		1.7/1.148	
Designated heating season	Average						

Indoor unit	FDE40VH	FDE50VH	FDE60VH	FDE71VH	FDE100VH	FDE100VH	FDE40VHx2	FDE50VHx2
Outdoor unit	SRC40ZSX-W1	SRC50ZSX-W3	SRC60ZSX-W3	FDC71VNX-W	FDC100VNX-W	FDC100VXS-W	FDC71VNX-W	FDC100VNX-W
Energy class (cooling/heating)	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+
SEER	6.46	6.15	6.72	6.58	7.00	7.00	6.48	6.76
SCOP (Average climate)	4.02	4.07	4.41	4.45	4.24	4.24	4.49	4.00
Pdesign (cooling/heating (@-10°C))	kW	4.0/3.0	5.0/3.8	5.6/4.5	7.1/6.0	10.0/11.2	10.0/11.2	7.1/6.0
Annual electricity consumption (cooling/heating)	kWh/a	217/1045	285/1307	292/1430	378/1889	501/3700	501/3700	384/1870
Refrigerant	GWP	R32/675			R410A/2088			R32/675
	charge kg/TCO ₂ e	1.30/0.878			2.75/1.86			4.0/2.7
Designated heating season	Average							

Indoor unit	FDE50VHx2	FDE100VH	FDE100VH	FDE50VHx2	FDE50VHx2	FDE100VH	FDE100VH	FDE50VHx2
Outdoor unit	FDC100VXS-W	FDC100VNX	FDC100VXS	FDC100VNX	FDC100VXS	FDC100VNA-W	FDC100VSA-W	FDC100VNA-W
Energy class (cooling/heating)	A++/A+	A+/A+	A+/A+	A/A	A/A	A++/A+	A++/A+	A++/A+
SEER	6.76	5.89	5.84	5.53	5.49	6.67	6.67	6.16
SCOP (Average climate)	4.00	4.18	4.17	3.94	3.94	4.31	4.31	4.10
Pdesign (cooling/heating (@-10°C))	kW	10.0/9.8	10.0/11.2	10.0/11.2	10.0/10.8	10.0/10.8	10.0/8.5	10.0/8.5
Annual electricity consumption (cooling/heating)	kWh/a	518/3434	595/3756	599/3762	634/3840	638/3841	525/2764	525/2764
Refrigerant	GWP	R32/675		R410A/2088			R32/675	
	charge kg/TCO ₂ e	4.0/2.7		4.5/9.396			3.3/2.228	
Designated heating season	Average							

Indoor unit	FDE50VHx2	FDE100VH	FDE100VH	FDE50VHx2	FDE50VHx2	FDE71VH	FDE100VH	FDE100VH
Outdoor unit	FDC100VSA-W	FDC100VNA	FDC100VSA	FDC100VNA	FDC100VSA	FDC71VNP-W	FDC90VNP-W	FDC100VNP-W
Energy class (cooling/heating)	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+
SEER	6.16	6.35	6.35	5.71	5.71	6.44	6.78	6.63
SCOP (Average climate)	4.10	4.31	4.31	4.10	4.10	4.32	4.46	4.24
Pdesign (cooling/heating (@-10°C))	kW	10.0/8.5	10.0/8.5	10.0/8.5	10.0/8.5	7.10/5.70	9.0/5.8	10.0/6.0
Annual electricity consumption (cooling/heating)	kWh/a	569/2906	552/2763	552/2763	613/2905	613/2905	386/1849	465/1822
Refrigerant	GWP	R32/675		R410A/2088			R32/675	
	charge kg/TCO ₂ e	3.3/2.228		3.8/7.934			1.30/0.878	
Designated heating season	Average							

Indoor unit	FDF71VH	FDF100VH	FDF100VH	FDF100VD2	FDF100VD2	FDF100VH	FDF100VH	FDF100VD2
Outdoor unit	FDC71VNX-W	FDC100VNX-W	FDC100VSX-W	FDC100VNX	FDC100VSX	FDC100VNA-W	FDC100VSA-W	FDC100VNA
Energy class (cooling/heating)	A++/A+	A++/A	A++/A	A/A	A/A	A+/A+	A+/A+	A+/A+
SEER	6.25	6.10	6.10	5.20	5.17	5.76	5.76	5.70
SCOP (Average climate)	4.03	3.84	3.84	3.80	3.80	4.00	4.00	4.00
Pdesign (cooling/heating (@-10°C))	kW	7.1/6.0	10.0/11.2	10.0/11.2	10.0/13.0	10.0/13.0	10.0/8.50	10.0/8.50
Annual electricity consumption (cooling/heating)	kWh/a	376/2085	574/4084	574/4084	673/4792	678/4795	608/2973	608/2973
Refrigerant	GWP	R32/675			R410A/2088		R32/675	
	charge kg/TCO ₂ E	2.75 / 1.86	4.0 / 2.7		4.5/9.396		3.3/2.23	
Designated heating season	Average							

Indoor unit	FDF100VD2	FDF71VH	FDF100VH	FDF100VH
Outdoor unit	FDC100VSA	FDC71VNP-W	FDC90VNP-W	FDC100VNP-W
Energy class (cooling/heating)	A+/A+	A+/A	A+/A+	A/A
SEER	5.70	5.85	5.90	5.43
SCOP (Average climate)	4.00	3.91	4.24	3.94
Pdesign (cooling/heating (@-10°C))	kW	10.0/8.5	7.10/5.70	9.0/6.0
Annual electricity consumption (cooling/heating)	kWh/a	614/2978	425/2039	535/1981
Refrigerant	GWP	R410A/2088	R32/675	
	charge kg/TCO ₂ E	3.8/7.934	1.6/3.341	1.7/1.15
Designated heating season	Average			

• Refrigerant contained in the products is a fluorinated greenhouse gas listed in Regulation (EU) No 517/2014.

• SEER/SCOP are based on EN14825:2016 and Commission regulation(EU) No.2016/2281. Temperature conditions for calculating SCOP are based on 'Average climate'.

• 'tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.

SEER and SCOP is defined in European regulations listed below.

No.2016/2281: requirement for air-heating products, cooling products, high temperature process chillers and fan coil units. Seasonal efficiency is the new way of rating the true efficiency of heating and cooling products over an entire year.

Set by the EU's new regulation implementing Eco-Design Directive for Energy Related Product (ErP) which specifies the minimum efficiency of air-conditioners manufacturers must integrate into their products.

The new Seasonal Efficiency rating system that must be used for heating and cooling by all manufacturers are;

Indoor unit	FDT125VH	FDT140VH	FDT125VH	FDT140VH	FDT125VH	FDT140VH	FDT125VH	FDT140VH	FDT125VH	FDT140VH	FDT125VH	FDT140VH
Outdoor unit	FDC125VNX-W	FDC140VNX-W	FDC125VSX-W	FDC140VSX-W	FDC125VNX	FDC140VNX	FDC125VSX	FDC140VSX	FDC125VNA-W	FDC140VNA-W	FDC125VSA-W	FDC140VSA-W
SEER	7.64	7.20	7.64	7.20	6.18	5.97	6.18	6.11	6.53	6.17	6.53	6.17
SCOP (Average climate)	4.44	4.35	4.26	4.14	4.08	4.05	4.03	3.99	4.38	4.42	4.38	4.42

Indoor unit	FDT125VH	FDT140VH	FDT125VH	FDT140VH	FDT125VH	FDT140VH	FDT125VH	FDT140VH	FDT125VH	FDT140VH	FDT125VH	FDT140VH
Outdoor unit	FDC125VNA	FDC140VNA	FDC125VSA	FDC140VSA	FDC125VNP-W	FDC125VNX-W	FDC140VNX-W	FDC125VSX-W	FDC140VSX-W	FDC125VNX	FDC140VNX	FDC125VSX
SEER	6.52	6.16	6.52	6.16	6.37	6.10	5.79	6.10	5.79	5.34	5.22	5.49
SCOP (Average climate)	4.38	4.28	4.38	4.28	4.27	4.06	3.99	3.92	3.88	3.87	3.85	3.91

Indoor unit	FDU140VH	FDU125VH	FDU140VH	FDU125VH	FDU140VH	FDU200VH	FDU250VH	FDU280VH	FDU125VH	FDU140VH	FDU125VH	FDU140VH
Outdoor unit	FDC140VSX	FDC125VNA-W	FDC140VNA-W	FDC125VSA-W	FDC140VSA-W	FDC200VSA-W	FDC250VSA-W	FDC280VSA-W	FDC125VNA	FDC140VNA	FDC125VSA	FDC140VSA
SEER	5.36	5.57	5.30	5.57	5.30	5.10	4.88	4.92	5.26	5.08	5.26	5.08
SCOP (Average climate)	3.88	4.13	4.01	4.13	4.01	3.55	3.54	3.70	4.13	4.01	4.13	4.01

Indoor unit	FDU200VH	FDU250VH	FDU125VH	FDM125VH	FDM140VH	FDM125VH	FDM140VH	FDM125VH	FDM140VH	FDM125VH	FDM140VH	FDM125VH
Outdoor unit	FDC200VSA	FDC250VSA	FDC125VNP-W	FDC125VNX-W	FDC140VNX-W	FDC125VSX-W	FDC140VSX-W	FDC125VNX	FDC140VNX	FDC125VSX	FDC140VSX	FDC125VSA-W
SEER	5.06	4.82	5.50	6.10	5.79	6.10	5.79	5.34	5.22	5.49	5.36	5.57
SCOP (Average climate)	3.52	3.51	4.01	4.06	3.99	3.92	3.88	3.87	3.85	3.91	3.88	4.13

Indoor unit	FDM140VH	FDM125VH	FDM140VH	FDM125VH	FDM140VH	FDM125VH	FDM140VH	FDM125VH	FDE125VH	FDE140VH	FDE125VH	FDE140VH
Outdoor unit	FDC140VNA-W	FDC125VSA-W	FDC140VSA-W	FDC125VNA	FDC140VNA	FDC125VSA	FDC140VSA	FDC125VNP-W	FDC125VNX-W	FDC140VNX-W	FDC125VSX-W	FDC140VSX-W
SEER	5.30	5.57	5.30	5.26	5.08	5.26	5.08	5.50	6.53	6.29	6.53	6.29
SCOP (Average climate)	4.01	4.13	4.01	4.13	4.01	4.13	4.01	4.01	4.20	4.17	4.02	3.96

Indoor unit	FDE125VH	FDE140VH	FDE125VH	FDE140VH	FDE125VH	FDE140VH	FDE125VH	FDE140VH	FDE125VH	FDE140VH	FDE125VH	FDE140VH
Outdoor unit	FDC125VNX	FDC140VNX	FDC125VSX	FDC140VSX	FDC125VNA-W	FDC140VNA-W	FDC125VSA-W	FDC140VSA-W	FDC125VNA	FDC140VNA	FDC125VSA	FDC140VSA
SEER	5.56	5.41	5.74	5.56	6.03	5.76	6.03	5.76	6.03	5.76	6.03	5.76
SCOP (Average climate)	3.71	3.66	3.66	3.62	4.30	4.24	4.30	4.24	4.30	4.24	4.30	4.15

Indoor unit	FDF125VH	FDF125VH	FDF140VH	FDF125VH	FDF140VH	FDF125VD	FDF140VD	FDF125VD	FDF140VD	FDF125VH	FDF140VH	FDF125VH
Outdoor unit	FDC125VNP-W	FDC125VNX-W	FDC140VNX-W	FDC125VSX-W	FDC140VSX-W	FDC125VNX	FDC140VNX	FDC125VSX	FDC140VSX	FDC125VNA-W	FDC140VNA-W	FDC125VSA-W
SEER	5.95	5.96	5.81	5.96	5.81	4.97	4.80	5.11	4.94	5.36	5.19	5.36
SCOP (Average climate)	4.21	3.89	3.81	3.85	3.72	3.60	3.56	3.60	3.60	3.96	3.99	3.96

Indoor unit	FDF140VH	FDF125VD	FDF140VD	FDF125VD	FDF140VD
Outdoor unit	FDC140VSA-W	FDC125VNA	FDC140VNA	FDC125VSA	FDC140VSA
SEER	5.19	5.36	5.09	5.36	5.03
SCOP (Average climate)	3.99	3.96	4.16	3.96	4.16

Before starting use

Heating performance

The heating performance values (kW) described in the catalogue are the values obtained by operating at an outdoor temperature of 7°C and indoor temperature of 20°C as set forth in the ISO Standards. Heating performance is reduced as the temperature drops. If the outdoor temperature is too low and the heating performance is insufficient, use other heating appliances as well.

Indication of sound values

The sound values are the values (A scale) measured in a chamber such as an anechoic chamber following the ISO Standards. In the actual installation state, the value is normally larger than the values given in the catalogue due to the effect of surrounding noise and echo. Take this into consideration when installing.

Use in oil atmosphere

Avoid installing this unit in an atmosphere where oil scatters or builds up, such as in a kitchen or machine factory. If the oil adheres to the heat exchanger, the heat exchanging performance will drop, mist may be generated, and the synthetic resin parts may deform and break.

Use in acidic or alkaline atmosphere

If this unit is used in acidic atmosphere such as hot spring areas having high level of sulfuric gases or in alkaline atmosphere including ammonia or calcium chloride, places where the exhaust of the heat exchanger is sucked in, or at coastal areas where the unit is subject to salt breezes, the outer plate or heat exchanger, etc., will corrode. Please ask a dealer or specialist when you use an air-conditioner in places differing from a general atmosphere.

Use in places with high ceilings

If the ceiling is high, install a circulator to improve the heat and air flow distribution when heating.

Refrigerant leakage

The refrigerant (R32, R410A) used for air-conditioner is non-toxic and in its original state. However, in consideration of a state where the refrigerant leaks into the room, measures against refrigerant leaks must be taken in small rooms where the tolerable level could be exceeded. Take measures by installing ventilation devices, etc.

Use in snowy areas

Take the following measures when installing the outdoor unit in snowy areas.

-Snow prevention

Install a snow-prevention hood so that the snow does not obstruct the air intake port or enter and freeze in the outdoor unit.

-Snow piling

In areas with heavy snow fall, the piled snow could block the air intake port. In this case, a frame that is 50cm or higher than the estimated snow fall must be installed underneath the outdoor unit.

Automatic defrosting device

If the temperature is low, and the humidity is high, frost will stick to the heat exchanger of the outdoor unit. If continued to use, the heating performance will drop.

The "Automatic defrosting device" will function to remove this frost. After heating for approx. three to ten minutes, it will stop, and the frost will be removed. After defrosting, hot air will be blown again.

Servicing

After the air-conditioner has been used for several seasons, dirt will build up in the air-conditioner causing the performance to drop. In addition to regular servicing, a maintenance contract by a specialist is recommended.

Safety Precautions

Air-conditioner usage target

The air-conditioner described in this catalogue is a dedicated cooling/heating device for human use. Do not use it for special applications such as the storage of food items, animals or plants, precision devices or valuable art, etc. This could cause the quality of the items to drop, etc. Do not use this for cooling vehicles or ships. Water leakage or current leaks could occur.

Before use

Always read the "User's Manual" thoroughly before starting use.

Installation

Always commission the installation to a dealer or specialist. Improper installation will lead to water leakage, electric shocks and fires. Make sure that the outdoor unit is stable in installation. Fix the unit to stable base.

Usage place

Do not install in places where combustible gas could leak or where there are sparks. Installation in a place where combustible gas could be generated, flow or accumulate, or places containing carbon fibers could lead to fires.

Certified ISO 9001



JQA-0709



Mitsubishi Heavy Industries - Mahajak Air Conditioners Co., Ltd. has been certified of Quality Management System in accordance with ISO 9001 by TUV NORD (Thailand) Ltd.



Certified ISO 14001



ISO 14001



Mitsubishi Heavy Industries - Mahajak Air Conditioners Co., Ltd. has been certified of Environmental Management System in accordance with ISO 14001 by TUV NORD (Thailand) Ltd.



02122E10366R2M



Mitsubishi Heavy Industries Thermal Systems, Ltd. Participate in the Eurovent certification program for comfort air-conditioner (AC1 & AC2). Check ongoing validity of certificate: www.eurovent-certification.com



Mitsubishi Heavy Industries Thermal Systems, Ltd.

(Wholly-owned subsidiary of MITSUBISHI HEAVY INDUSTRIES, LTD.)

2-3, Marunouchi 3-chome, Chiyoda-ku, Tokyo, 100-8332, Japan

<https://www.mhi-mth.co.jp/en/>

Because of our policy of continuous improvement, we reserve the right to make changes in all specifications without notice.

25P01EU February 2025 F Edited in Japan